Compal Confidential

Schematics Document

Intel Huron River

Sandy Bridge with Couger Point core logic

2010-10-27

REV:1.0

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title	Cover Page	
Size: Custom	Document Number: LA-6931P	Rev: 1.0
Date: Wednesday, October 27, 2010	Sheet 1 of 58	

Compal Confidential

Model Name : P5LM0
File Name : LA-6931P

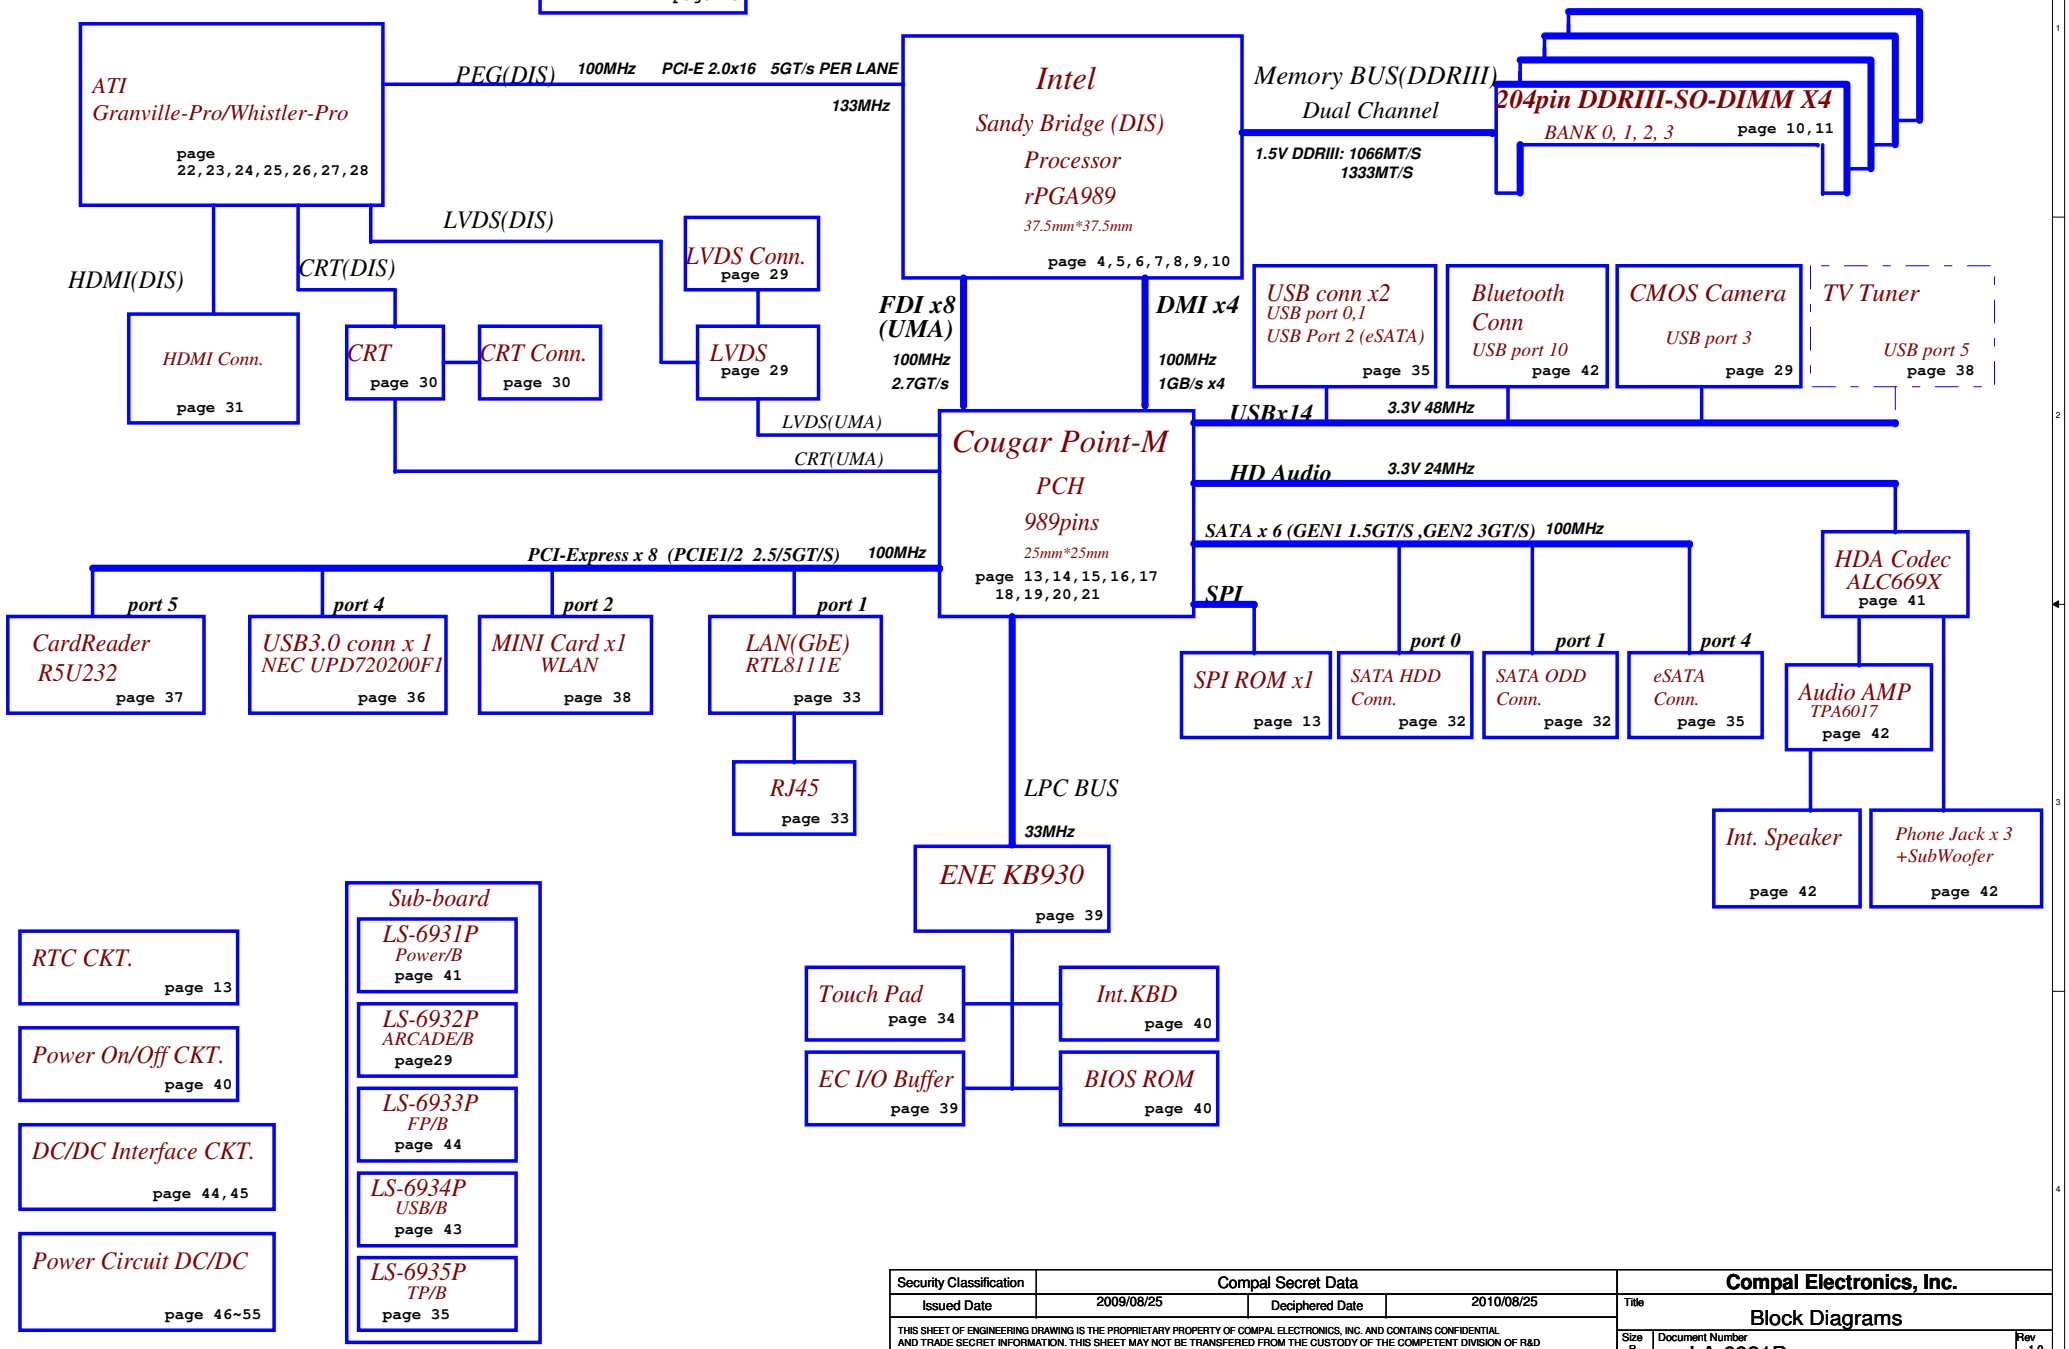

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.			
Title: Block Diagrams			
Size: B	Document Number: LA-6931P		Rev: 1.0
Date: Wednesday, October 27, 2010	Sheet 2 of 58		

Voltage Rails

Power Plane	Description	S1	S3	S5	DGPU (DIS)	IGPU (SG)
VIN	Adapter power supply (19V)	N/A	N/A	N/A		
B+	AC or battery power rail for power circuit.	N/A	N/A	N/A		
BATT+	Battery power supply (12.6V)	N/A	N/A	N/A		
+CPU_CORE	Core voltage for CPU	ON	OFF	OFF		
+0.75VS	0.75V switched power rail for DDR terminator	ON	OFF	OFF		
+1.05VS_VCCP	1.05V switched power rail for CPU (PCH)	ON	OFF	OFF		
+VGFX_CORE	Core voltage for IGPU	ON	OFF	OFF		
+1.5V	1.5V power rail for DDRIII	ON	ON	OFF		
+1.5VS	1.5V switched power rail	ON	OFF	OFF		
+1.8VS	1.8V switched power rail	ON	OFF	OFF		
+3VALW	3.3V always on power rail	ON	ON	ON*		
+3VALW_PCH	3.3V power rail for PCH	ON	ON	ON*		
+LAN_IO	3.3V power rail for LAN	ON	ON	ON*		
+3VS	3.3V switched power rail	ON	OFF	OFF		
+5VALW	5V always on power rail	ON	ON	ON*		
+5VS	5V switched power rail	ON	OFF	OFF		
+VSB	VSB always on power rail	ON	ON	ON*		
+RTCVCC	RTC power	ON	ON	ON		
+VGA_CORE	5V power rail for GPU	ON	OFF	OFF	ON	OFF
+1.5VSDGPU	1.5V power rail for VRAM	ON	OFF	OFF	ON	OFF
+1.8VSDGPU	1.8V switched power rail for GPU	ON	OFF	OFF	ON	ON

Note : ON* means that this power plane is ON only with AC power available, otherwise it is OFF.

External PCI Devices

Device	IDSEL#	REQ#/GNT#	Interrupts

EC SM Bus1 address

Device	Address

EC SM Bus2 address

Device	Address

Ibex SM Bus address

Device	Address

STATE \ SIGNAL	SLP_S1#	SLP_S3#	SLP_S4#	SLP_S5#	+VALW	+V	+VS	Clock
Full ON	HIGH	HIGH	HIGH	HIGH	ON	ON	ON	ON
S1(Power On Suspend)	LOW	HIGH	HIGH	HIGH	ON	ON	ON	LOW
S3 (Suspend to RAM)	LOW	LOW	HIGH	HIGH	ON	ON	OFF	OFF
S4 (Suspend to Disk)	LOW	LOW	LOW	HIGH	ON	OFF	OFF	OFF
S5 (Soft OFF)	LOW	LOW	LOW	LOW	ON	OFF	OFF	OFF

Board ID / SKU ID Table for AD channel

Vcc	3.3V +/- 5%
Ra/Rc/Re	100K +/- 5%

Board ID	Rb / Rd / Rf	V_{AD_BID} min	V_{AD_BID} typ	V_{AD_BID} max
0	0	0 V	0 V	0 V
1	8.2K +/- 5%	0.216 V	0.250 V	0.289 V
2	18K +/- 5%	0.436 V	0.503 V	0.538 V
3	33K +/- 5%	0.712 V	0.819 V	0.875 V
4	56K +/- 5%	1.036 V	1.185 V	1.264 V
5	100K +/- 5%	1.453 V	1.650 V	1.759 V
6	200K +/- 5%	1.935 V	2.200 V	2.341 V
7	NC	2.500 V	3.300 V	3.300 V

BOARD ID Table

Board ID	PCB Revision
0	0.1
1	
2	
* 3	0.4
4	
5	
6	
7	

BTO Option Table

BTO Item	BOM Structure
DIS Only	DIS@
Switchable Graphics	SG@
Granville	GRA@
Whistler	WHI@
For CIR	CIR@
USB2.0 bus	USB2@
DDR M1	M1@
DDR M3	M3@
For 45 level	45@

USB Port Table

USB 2.0	USB 1.1	Port	4 External USB Port
EHCI1	UHCI0	0	USB/B
		1	USB Conn.
	UHCI1	2	
		3	
	UHCI2	4	Mini Card 1
		5	Mini Card 2
	UHCI3	6	
		7	
EHCI2	UHCI4	8	USB Conn.
		9	eSATA USB
	UHCI5	10	CMOS Camera
		11	Finger Print
	UHCI6	12	USB3.0 @
		13	Blue Tooth

43 Level BOM Config

Granville DIS: GRA@ DIS@ CIR@ M1@
Whistler SG: WHI@ SG@ CIR@ M1@

45 Level BOM Config

45@

VRAM BOM Config

X76255BOL01: HYNIX 1G (old die)
X76255BOL02 HYNIX 1G (new die)
X76255BOL04 HYNIX 2G

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: Notes List

Size	Document Number	Rev
B	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 3 of 58

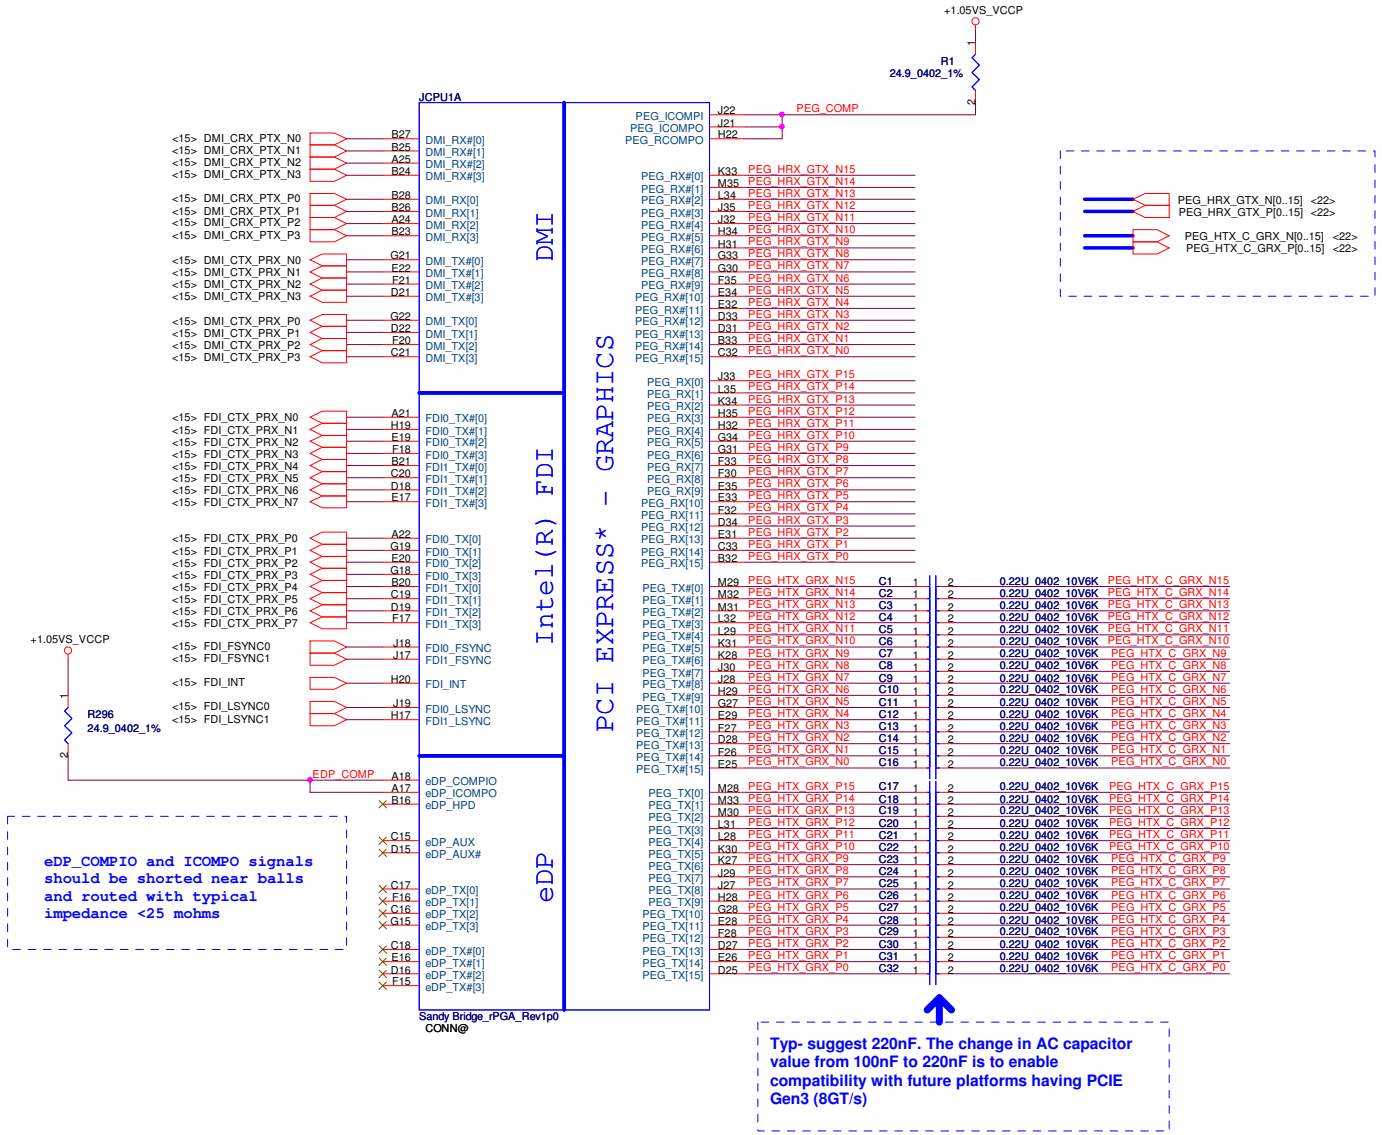

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PROCESSOR(1/7) DMI,FDI,PEG

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 4 of 58

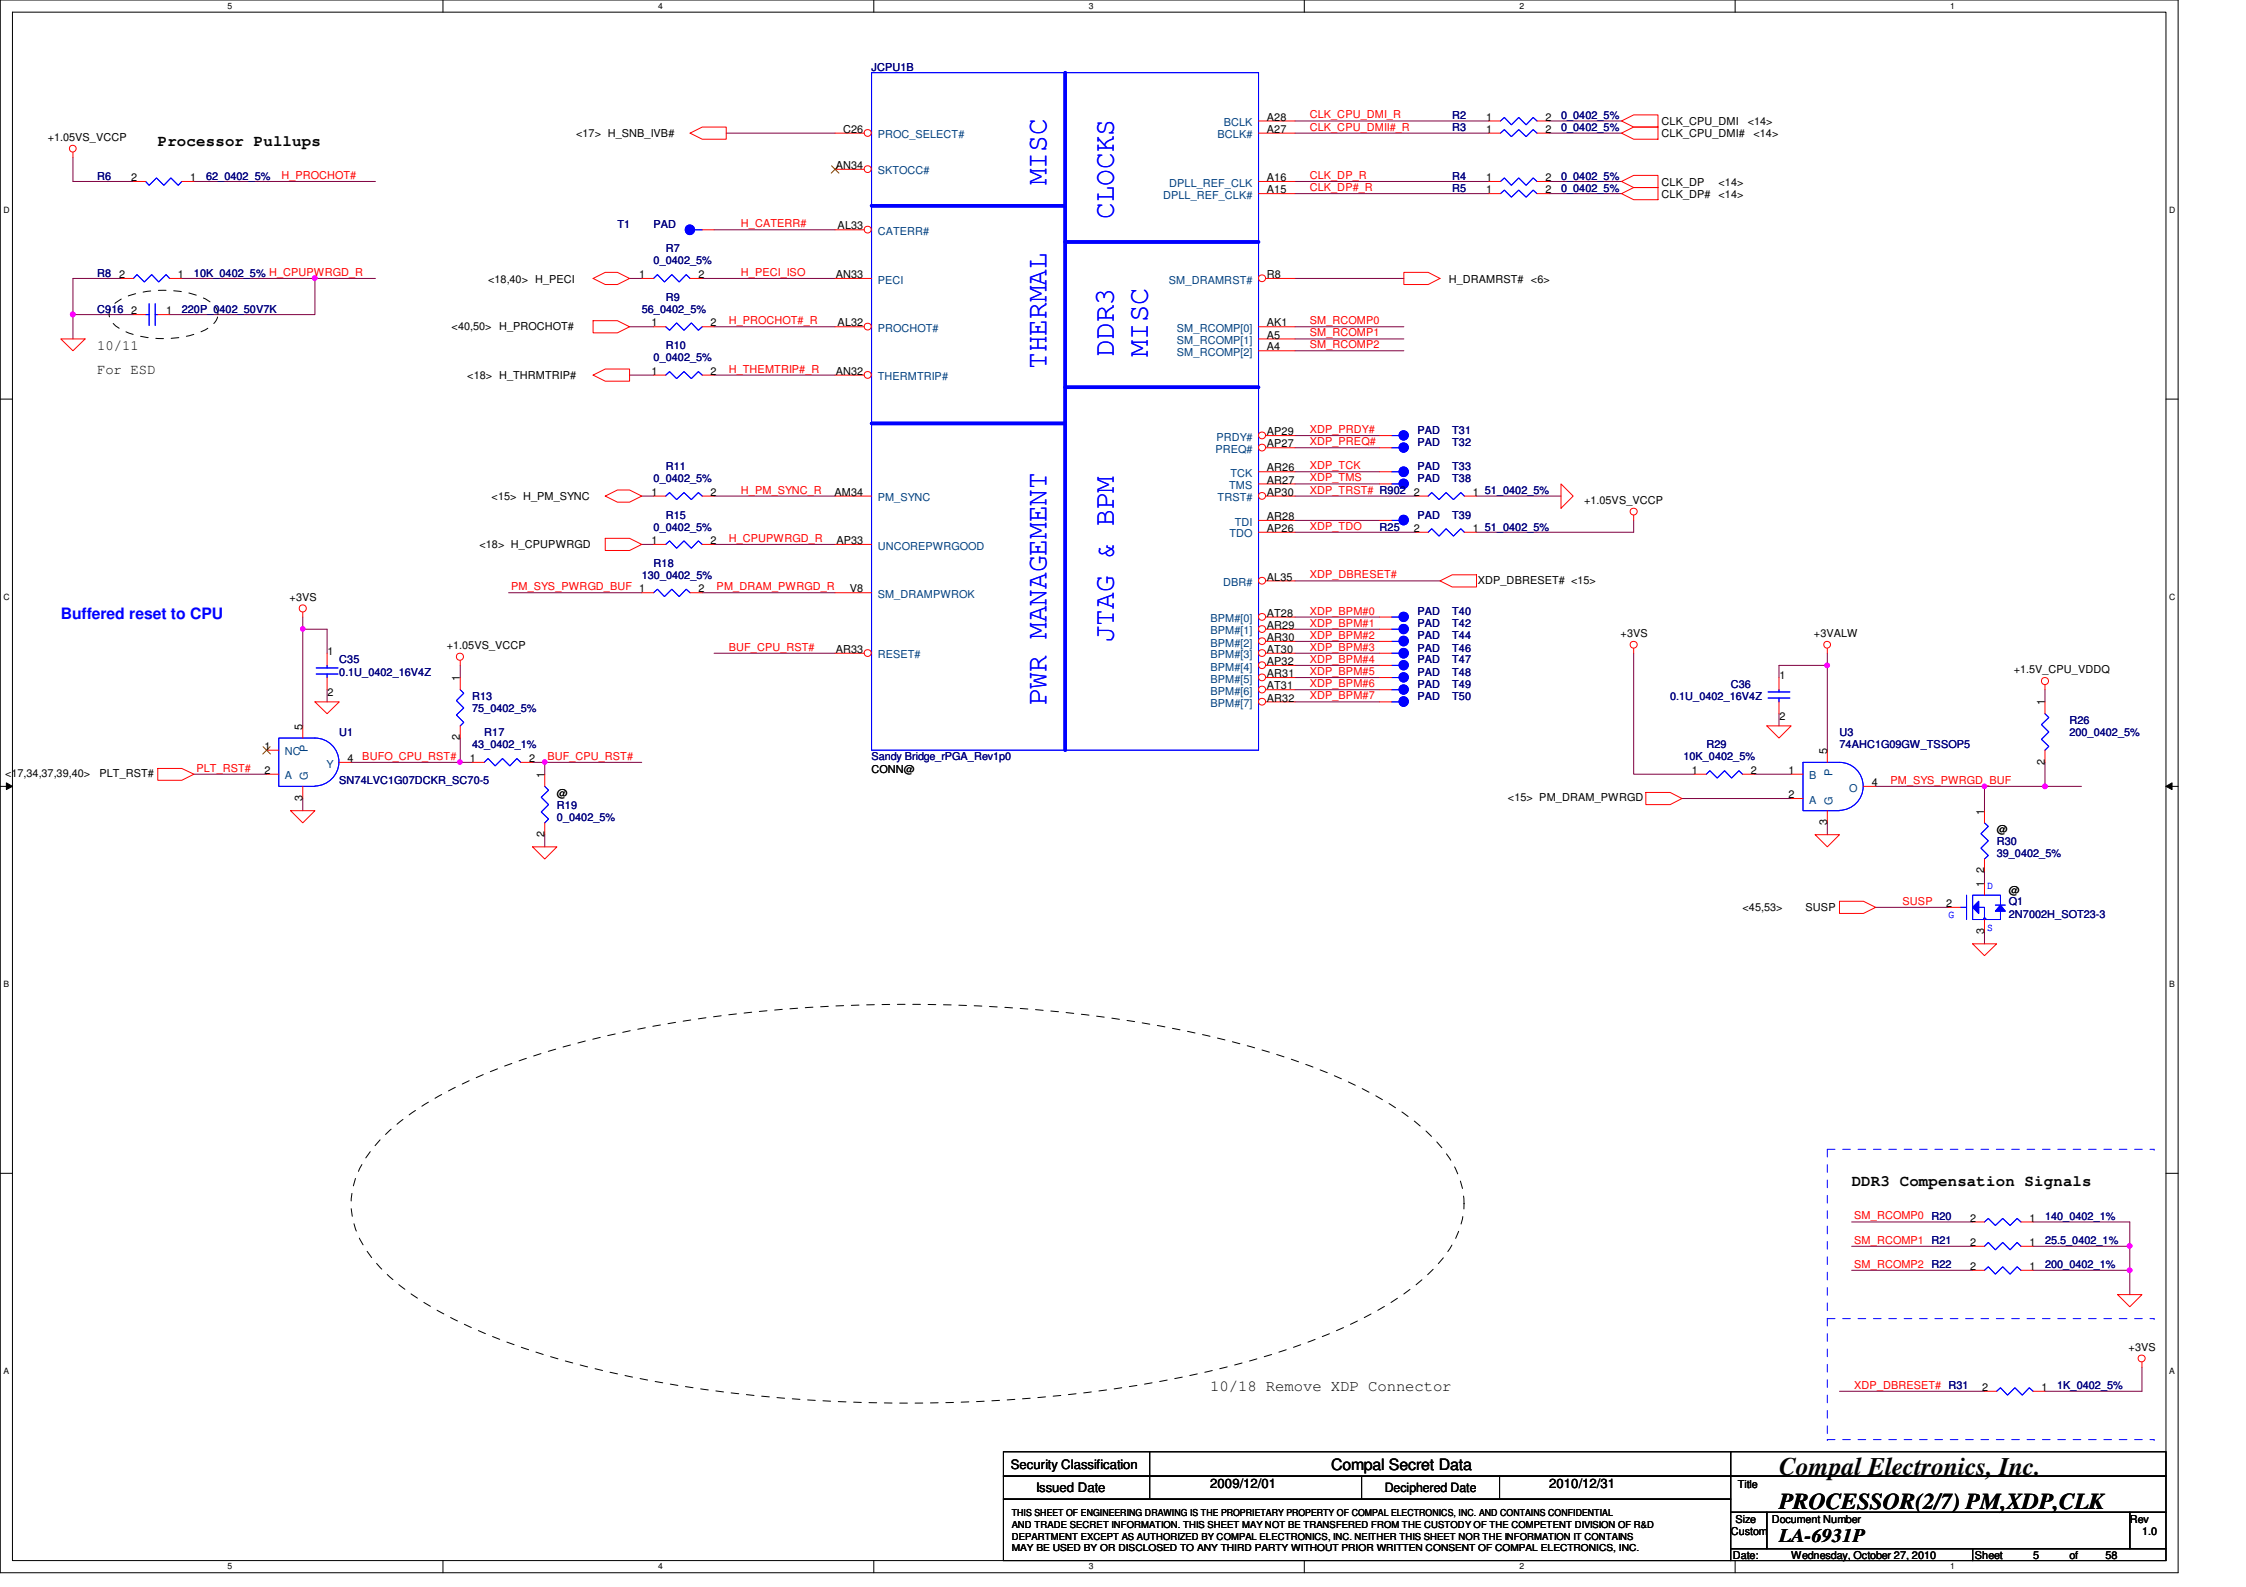

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Title	Compal Electronics, Inc.		
	PROCESSOR(2/7) PM,XDP,CLK		
Size: Custom	Document Number: LA-6931P		Rev: 1.0
Date: Wednesday, October 27, 2010	Sheet 5 of 58		

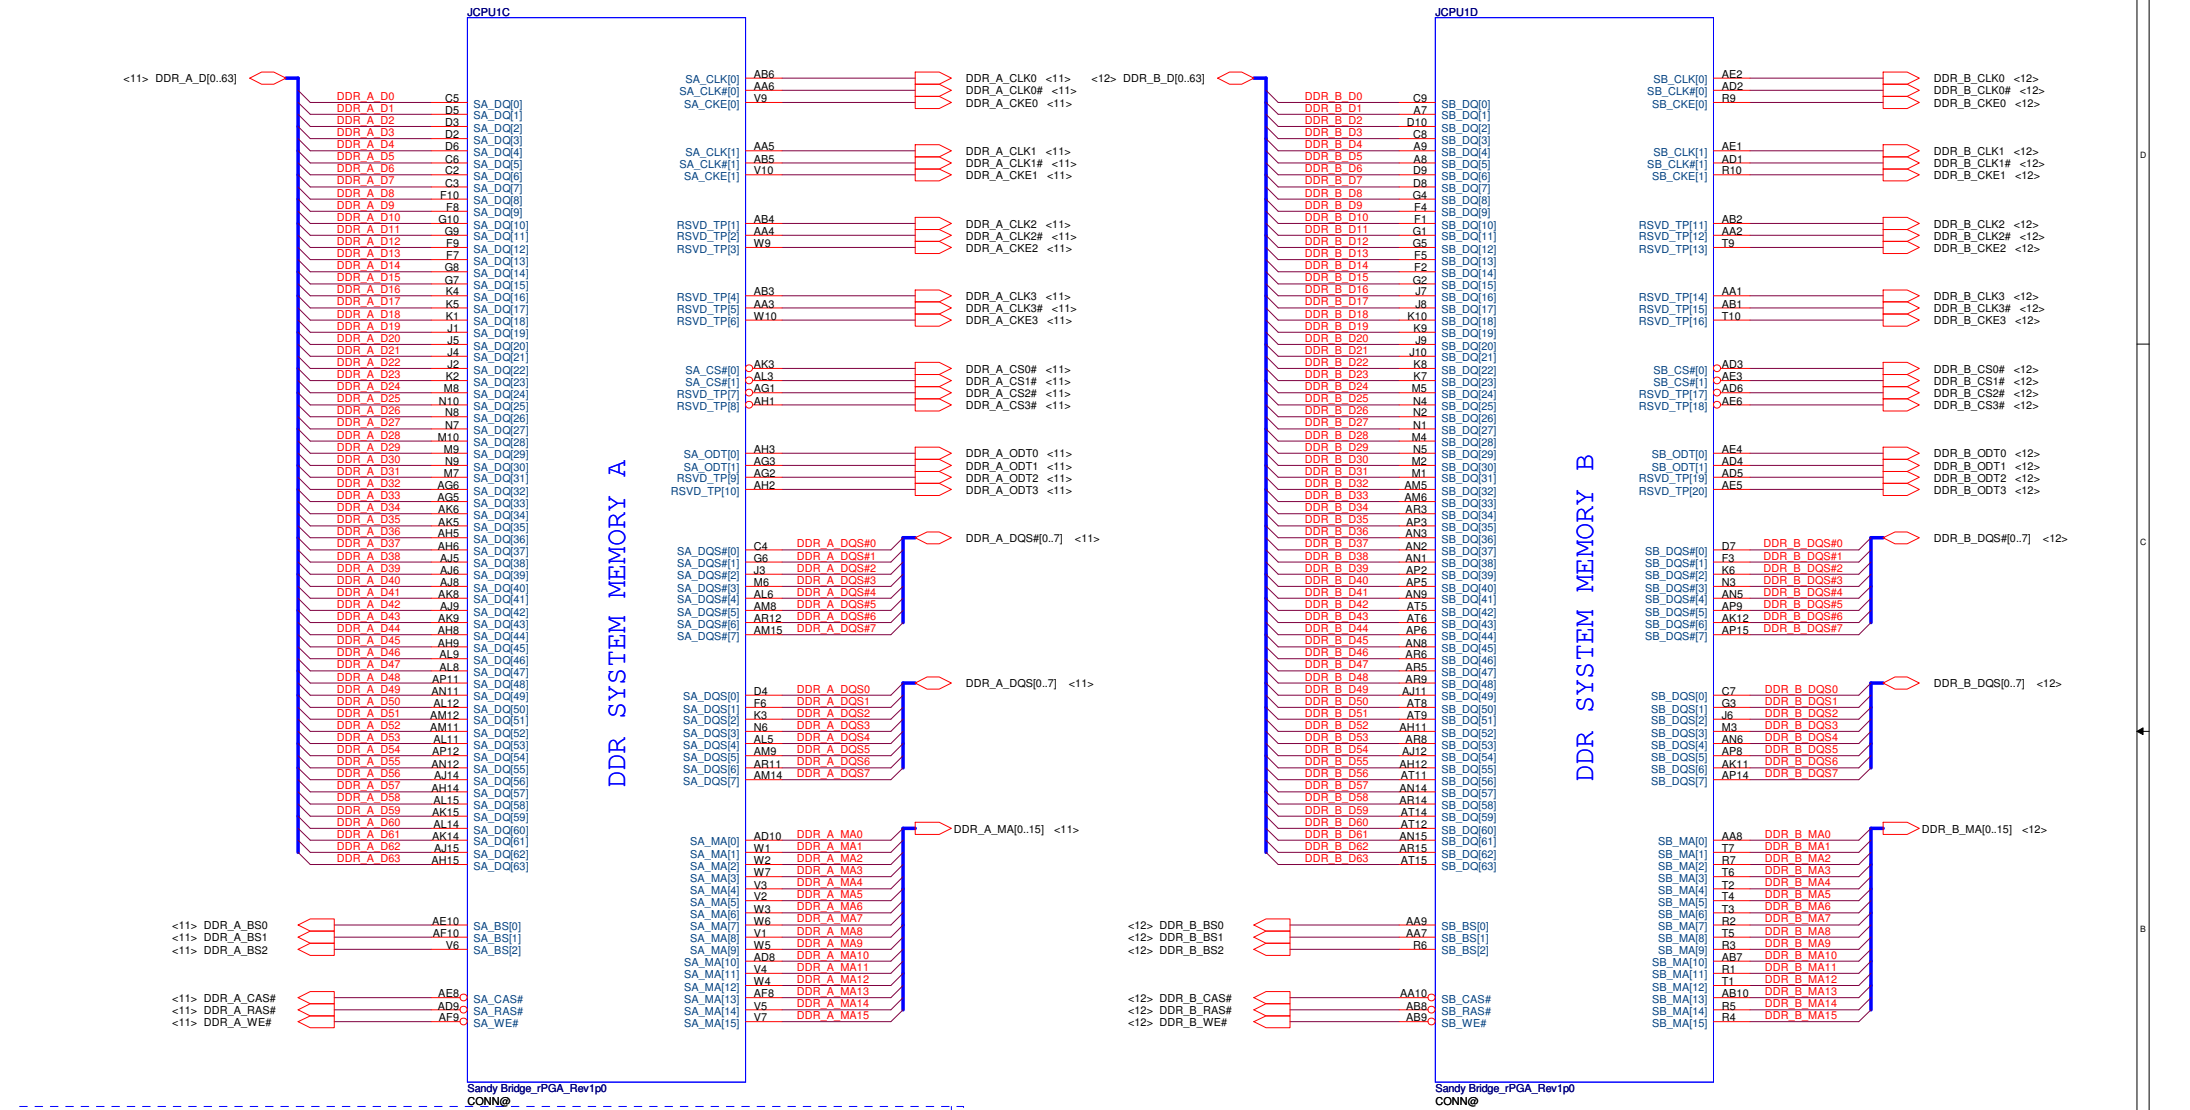

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PROCESSOR(3/7) DDRIII

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 6 of 58

CFG Straps for Processor

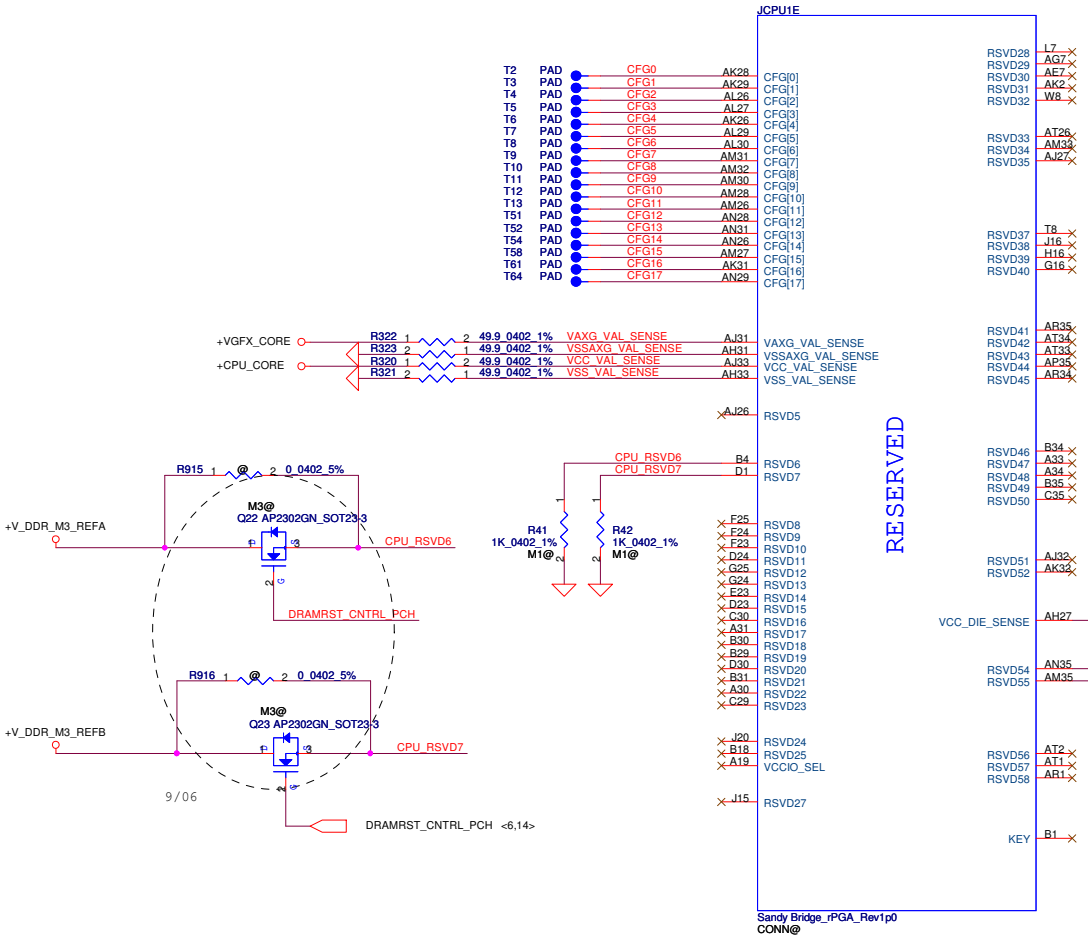



PEG Static Lane Reversal – CFG2 is for the 16x	
CFG2	1: Normal Operation; Lane # definition matches socket pin map definition * 0:Lane Reversed



Display Port Presence Strap	
CFG4	1 : Disabled; No Physical Display Port attached to Embedded Display Port * 0 : Enabled; An external Display Port device is connected to the Embedded Display Port



PCIE Port Bifurcation Straps	
CFG[6:5]	*11: (Default) x16 - Device 1 functions 1 and 2 disabled 10: x8, x8 - Device 1 function 1 enabled ; function 2 disabled 01: Reserved - (Device 1 function 1 disabled ; function 2 enabled) 00: x8,x4,x4 - Device 1 functions 1 and 2 enabled



PEG DEFER TRAINING	
CFG7	1: (Default) PEG Train immediately following xxRESETB de assertion 0: PEG Wait for BIOS for training

Compal Electronics, Inc.

Title: PROCESSOR(4/7) RSVD,CFG

Size: Custom | Document Number: LA-6931P | Rev: 1.0

Date: Wednesday, October 27, 2010 | Sheet 7 of 58

POWER

SV type CPU

JCPU1F

Bottom Socket Cavity

+CPU_CORE

C38 10U_0805_6.3V6M
C39 10U_0805_6.3V6M
C40 10U_0805_6.3V6M
C41 10U_0805_6.3V6M
C42 10U_0805_6.3V6M
C788 10U_0805_6.3V6M
C789 10U_0805_6.3V6M
C790 10U_0805_6.3V6M
C791 10U_0805_6.3V6M
C792 10U_0805_6.3V6M

Top Socket Cavity

+CPU_CORE

C799 22U_0805_6.3V6M
C800 22U_0805_6.3V6M
C801 22U_0805_6.3V6M
C68 22U_0805_6.3V6M
C807 22U_0805_6.3V6M
C802 22U_0805_6.3V6M
C803 22U_0805_6.3V6M
C804 22U_0805_6.3V6M

Top Socket Edge

C73 22U_0805_6.3V6M
C74 22U_0805_6.3V6M
C805 22U_0805_6.3V6M
C806 22U_0805_6.3V6M
C807 22U_0805_6.3V6M
C808 22U_0805_6.3V6M
C809 22U_0805_6.3V6M
C810 22U_0805_6.3V6M

Bottom Socket Edge

+CPU_CORE

C811 330U_D2_2.5VY_R9M
C812 330U_D2_2.5VY_R9M
C813 470U_D2_2VM_R4.5M
C814 470U_D2_2VM_R4.5M

09/10

53A

AG35 AG34 AG33 AG32 AG31 AG30 AG29 AG28 AG27 AG26 AF35 AF34 AF33 AF32 AF31 AF30 AF29 AF28 AF27 AF26 AD35 AD34 AD33 AD32 AD31 AD30 AD29 AD28 AD27 AD26 AC35 AC34 AC33 AC32 AC31 AC30 AC29 AC28 AC27 AC26 AA35 AA34 AA33 AA32 AA31 AA30 AA29 AA28 AA27 AA26 Y35 Y34 Y33 Y32 Y31 Y30 Y29 Y28 Y27 Y26 V35 V34 V33 V32 V31 V30 V29 V28 V27 V26 U35 U34 U33 U32 U31 U30 U29 U28 U27 U26 R35 R34 R33 R32 R31 R30 R29 R28 R27 R26 P35 P34 P33 P32 P31 P30 P29 P28 P27 P26

VCC1 VCC2 VCC3 VCC4 VCC5 VCC6 VCC7 VCC8 VCC9 VCC10 VCC11 VCC12 VCC13 VCC14 VCC15 VCC16 VCC17 VCC18 VCC19 VCC20 VCC21 VCC22 VCC23 VCC24 VCC25 VCC26 VCC27 VCC28 VCC29 VCC30 VCC31 VCC32 VCC33 VCC34 VCC35 VCC36 VCC37 VCC38 VCC39 VCC40 VCC41 VCC42 VCC43 VCC44 VCC45 VCC46 VCC47 VCC48 VCC49 VCC50 VCC51 VCC52 VCC53 VCC54 VCC55 VCC56 VCC57 VCC58 VCC59 VCC60 VCC61 VCC62 VCC63 VCC64 VCC65 VCC66 VCC67 VCC68 VCC69 VCC70 VCC71 VCC72 VCC73 VCC74 VCC75 VCC76 VCC77 VCC78 VCC79 VCC80 VCC81 VCC82 VCC83 VCC84 VCC85 VCC86 VCC87 VCC88 VCC89 VCC90 VCC91 VCC92 VCC93 VCC94 VCC95 VCC96 VCC97 VCC98 VCC99 VCC100

PEG AND DDR

CORE SUPPLY

SVID

SENSE LINES

18A

+1.05VS_VCCP

VCCIO1 VCCIO2 VCCIO3 VCCIO4 VCCIO5 VCCIO6 VCCIO7 VCCIO8 VCCIO9 VCCIO10 VCCIO11 VCCIO12 VCCIO13 VCCIO14 VCCIO15 VCCIO16 VCCIO17 VCCIO18 VCCIO19 VCCIO20 VCCIO21 VCCIO22 VCCIO23 VCCIO24 VCCIO25 VCCIO26 VCCIO27 VCCIO28 VCCIO29 VCCIO30 VCCIO31 VCCIO32 VCCIO33 VCCIO34 VCCIO35 VCCIO36 VCCIO37 VCCIO38 VCCIO39 VCCIO40

AH13 AH10 AG10 AC10 Y10 U10 P10 L10 J14 J13 J12 J11 H14 H12 H11 G14 G13 G12 F14 F13 F12 F11 E14 E12 E11 D14 D13 D12 D11 C14 C13 C12 C11 B14 B12 A14 A13 A12 A11 J23

MB Bottom Socket Cavity

C43 22U_0805_6.3V6M
C44 22U_0805_6.3V6M
C785 22U_0805_6.3V6M
C786 22U_0805_6.3V6M
C47 22U_0805_6.3V6M
C794 330U_D2_2V_Y
C906 330U_D2_2V_Y
C48 @ 22U_0805_6.3V6M
C49 @ 22U_0805_6.3V6M
C50 @ 22U_0805_6.3V6M
C51 @ 22U_0805_6.3V6M
C787 22U_0805_6.3V6M

MB Top Socket Cavity

C795 22U_0805_6.3V6M
C796 22U_0805_6.3V6M
C797 @ 22U_0805_6.3V6M
C798 @ 22U_0805_6.3V6M
C793 330U_D2_2V_Y
C910 22U_0805_6.3V6M
C209 22U_0805_6.3V6M
C904 22U_0805_6.3V6M
C211 22U_0805_6.3V6M
C212 22U_0805_6.3V6M

+1.05VS_VCCP

R44 130_0402_5%
R903 75_0402_5%
R46 43_0402_1%

VIDALERT# AJ29 H_CPU_SVIDALRT#
VIDSCLK AJ30 H_CPU_SVIDCLK
VIDSOUT AJ28 H_CPU_SVIDDAT

R842 0_0402_5%
R843 0_0402_5%

VR_SVID_ALRT# <56>
VR_SVID_CLK <56>
VR_SVID_DAT <56>

Place the PU resistors close to VR

+CPU_CORE

R844 100_0402_1%
R52 100_0402_1%

VCC_SENSE AJ35 VCCSENSE_R
VSS_SENSE AJ34 VSSSENSE_R

R50 0_0402_5%
R51 0_0402_5%

VCCSENSE <56>
VSSSENSE <56>

VCCIO_SENSE B10 VCCIO_SENSE
VSSIO_SENSE A10 VSSIO_SENSE

VCCIO_SENSE <53>
VSSIO_SENSE <53>

Place the PU resistors close to CPU

Sandy Bridge rPGA Rev1p0

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PROCESSOR(5/7) PWR,BYPASS

Size: Custom | Document Number: LA-6931P | Rev: 1.0

Date: Wednesday, October 27, 2010 | Sheet 8 of 58

+1.5V_CPU_VDDQ Source

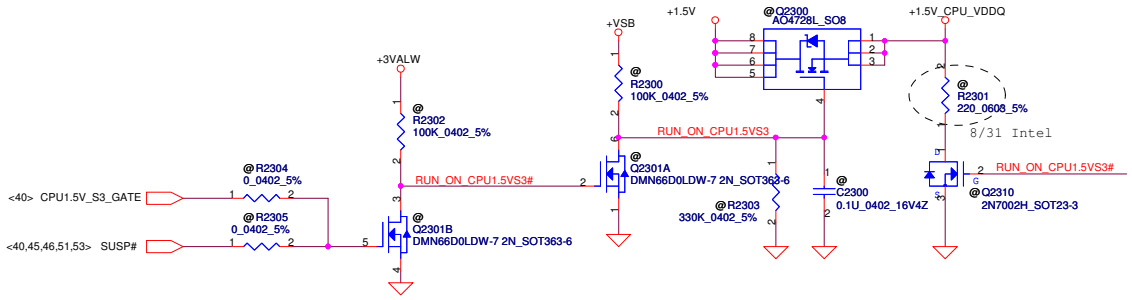

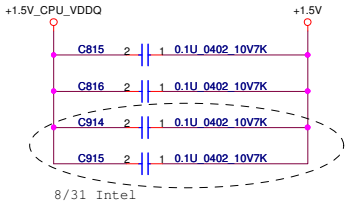

POWER

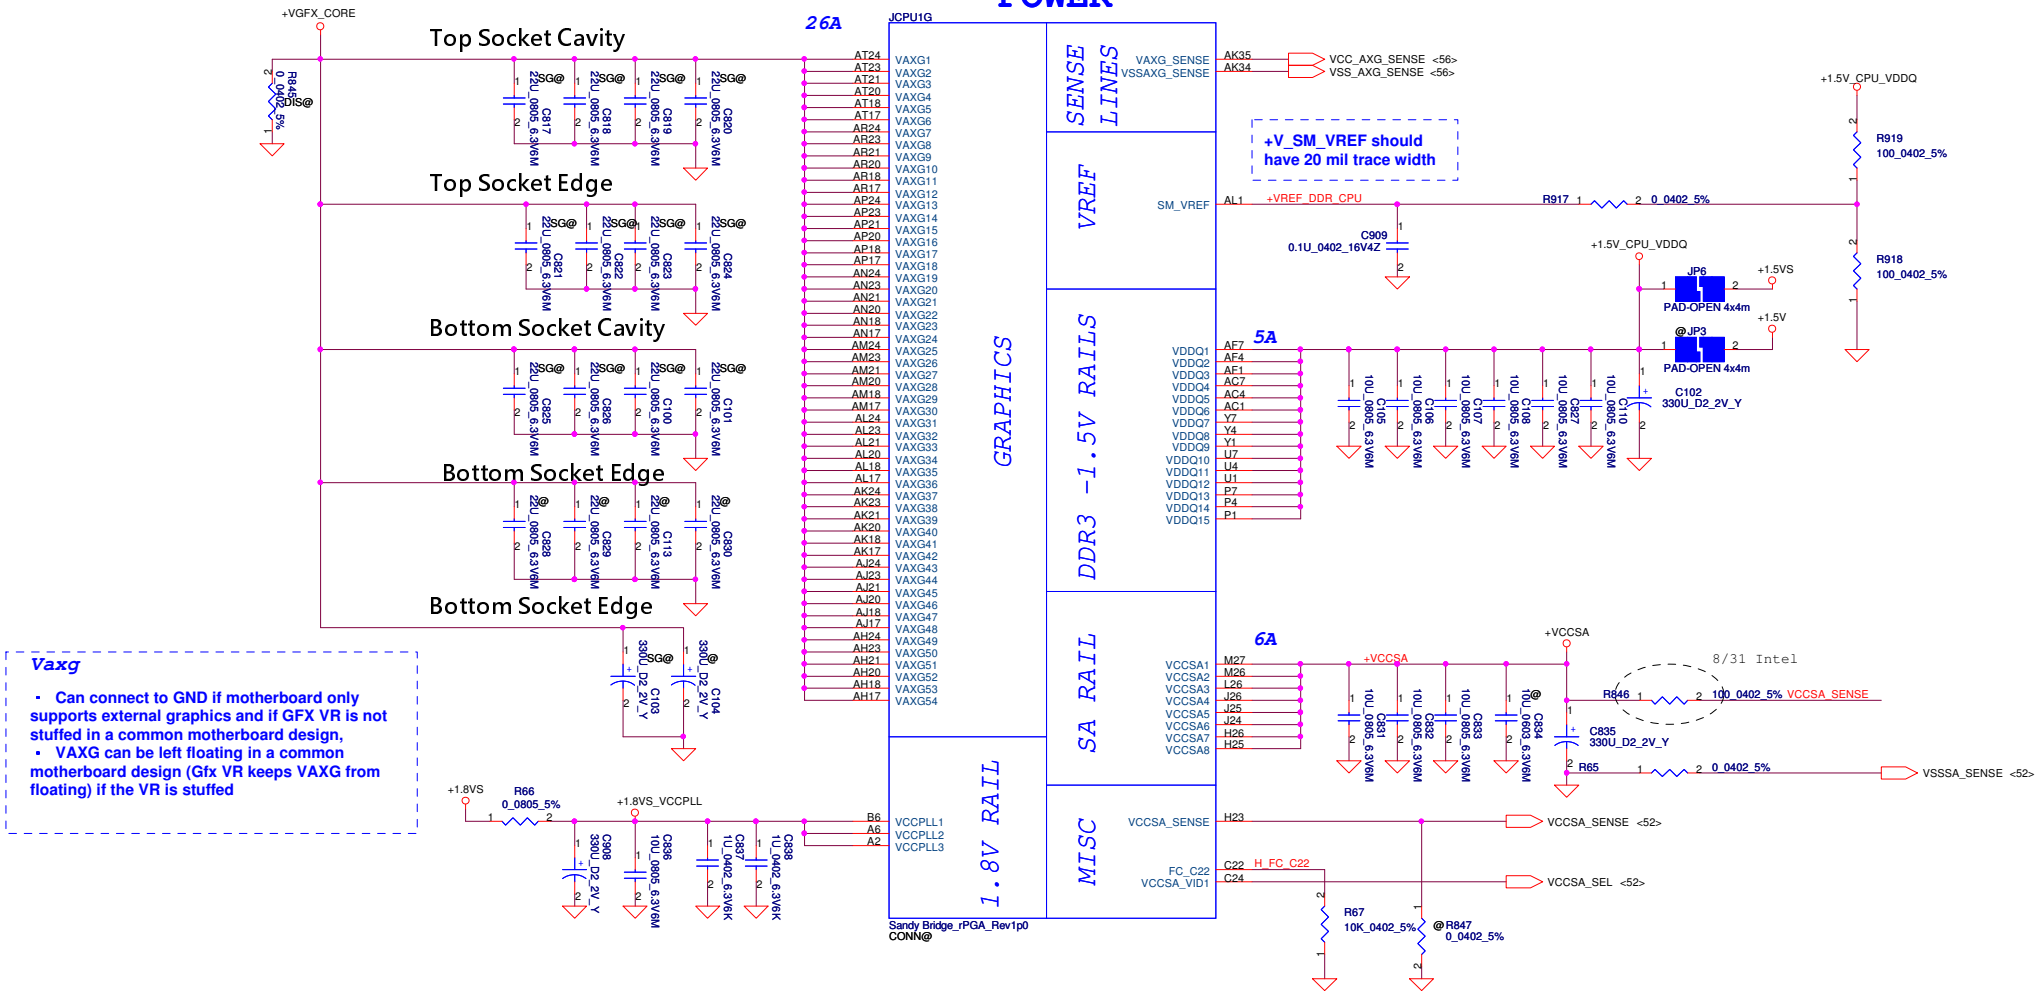

Vaxg

- Can connect to GND if motherboard only supports external graphics and if GFX VR is not stuffed in a common motherboard design,
- VAXG can be left floating in a common motherboard design (Gfx VR keeps VAXG from floating) if the VR is stuffed

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PROCESSOR(6/7) PWR

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 9 of 58

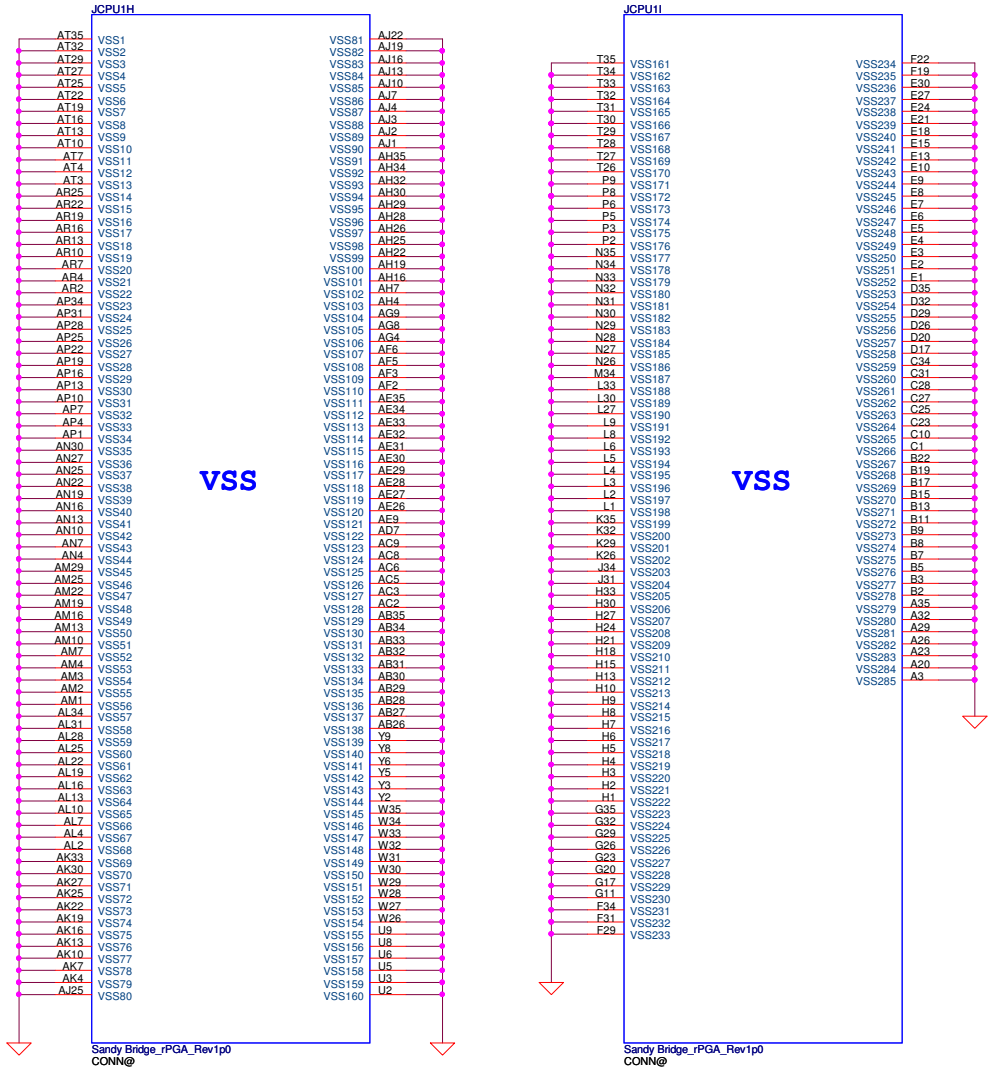

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PROCESSOR(7/7) VSS

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 10 of 58

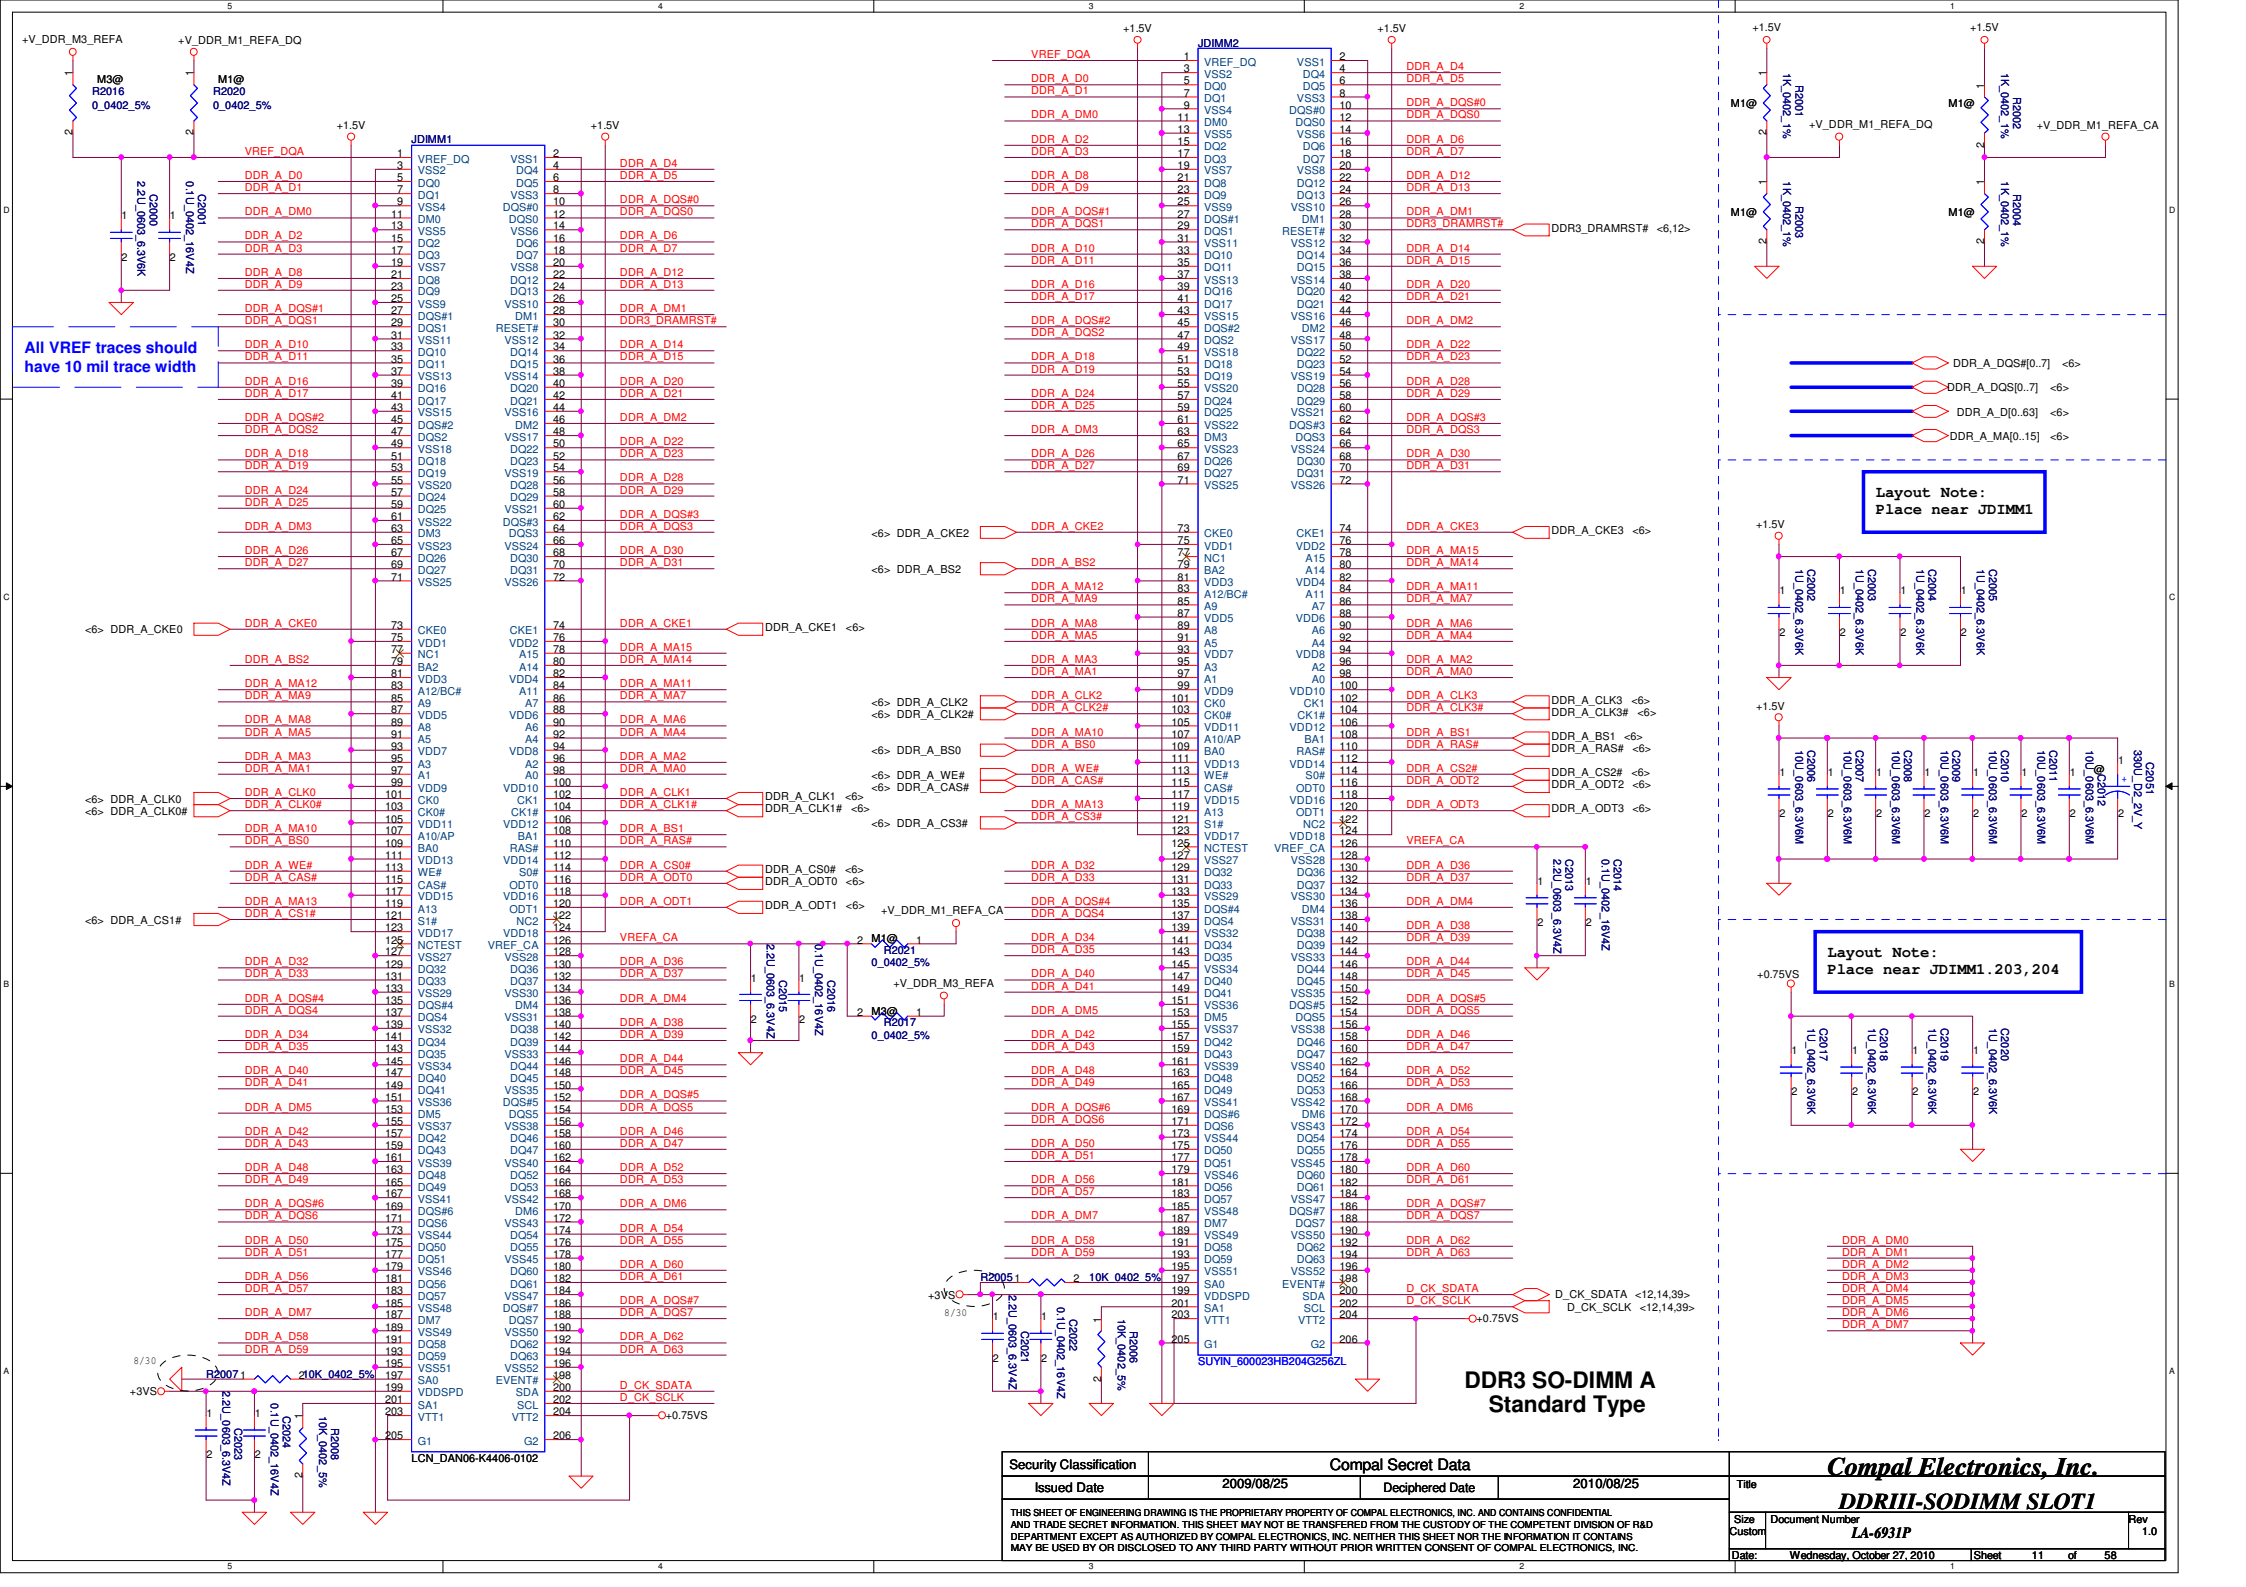

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: **DDRIII-SODIMM SLOT1**

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 | Sheet 11 of 58

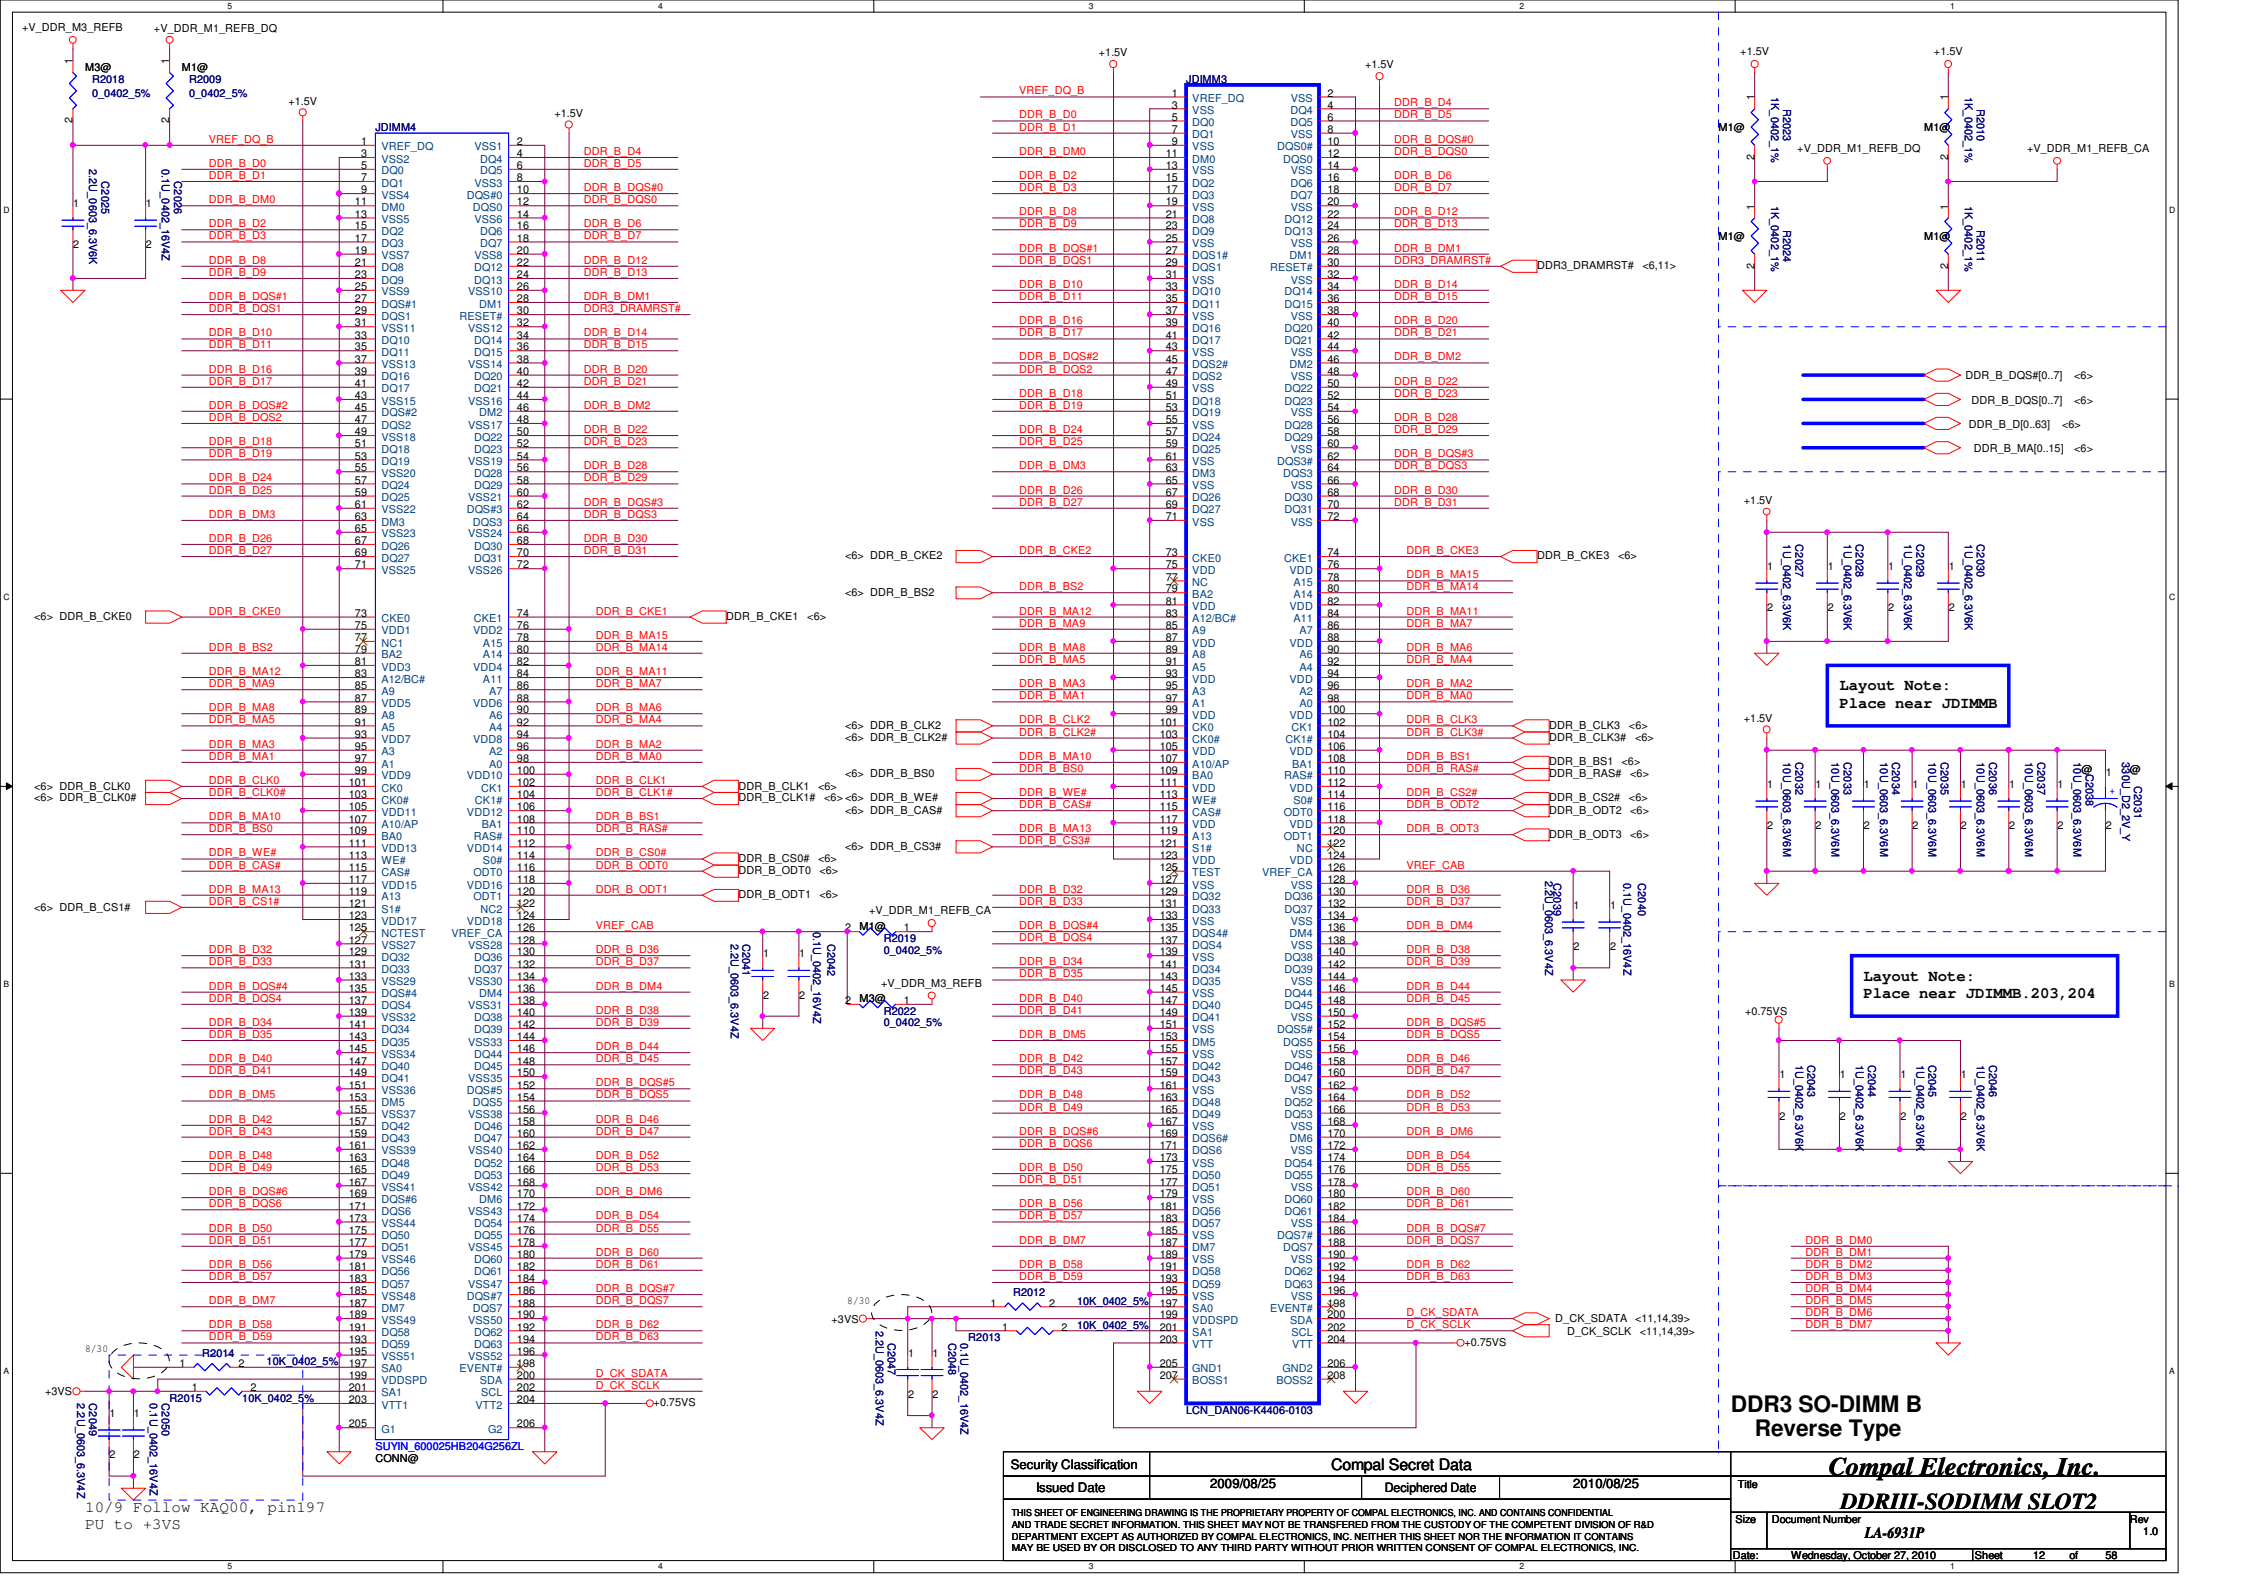
+V_DDR_M3_REFB
+V_DDR_M1_REFB_DQ
M3@ R2018 0_0402_5%
M1@ R2009 0_0402_5%
+1.5V
JDIMM4
VREF_DQ_B
DDR_B_D0
DDR_B_D1
DDR_B_DM0
DDR_B_D2
DDR_B_D3
DDR_B_D8
DDR_B_D9
DDR_B_DQS#1
DDR_B_DQS1
DDR_B_D10
DDR_B_D11
DDR_B_D16
DDR_B_D17
DDR_B_DQS#2
DDR_B_DQS2
DDR_B_D18
DDR_B_D19
DDR_B_D24
DDR_B_D25
DDR_B_DM3
DDR_B_D26
DDR_B_D27
DDR_B_CKE0
DDR_B_BS2
DDR_B_MA12
DDR_B_MA9
DDR_B_MA8
DDR_B_MA5
DDR_B_MA3
DDR_B_MA1
DDR_B_CLK0
DDR_B_CLK0#
DDR_B_MA10
DDR_B_BS0
DDR_B_WE#
DDR_B_CAS#
DDR_B_MA13
DDR_B_CS1#
DDR_B_D32
DDR_B_D33
DDR_B_DQS#4
DDR_B_DQS4
DDR_B_D34
DDR_B_D35
DDR_B_D40
DDR_B_D41
DDR_B_DM5
DDR_B_D42
DDR_B_D43
DDR_B_D48
DDR_B_D49
DDR_B_DQS#6
DDR_B_DQS6
DDR_B_D50
DDR_B_D51
DDR_B_D56
DDR_B_D57
DDR_B_DM7
DDR_B_D58
DDR_B_D59
DDR_B_CKE1
DDR_B_MA15
DDR_B_MA14
DDR_B_MA11
DDR_B_MA7
DDR_B_MA6
DDR_B_MA4
DDR_B_MA2
DDR_B_MA0
DDR_B_CLK1
DDR_B_CLK1#
DDR_B_BS1
DDR_B_RAS#
DDR_B_CS0#
DDR_B_ODT0
DDR_B_ODT1
VREF_CAB
DDR_B_D36
DDR_B_D37
DDR_B_DM4
DDR_B_D38
DDR_B_D39
DDR_B_D44
DDR_B_D45
DDR_B_DQS#5
DDR_B_DQS5
DDR_B_D46
DDR_B_D47
DDR_B_D52
DDR_B_D53
DDR_B_DM6
DDR_B_D54
DDR_B_D55
DDR_B_D60
DDR_B_D61
DDR_B_DQS#7
DDR_B_DQS7
DDR_B_D62
DDR_B_D63
D_CK_SDATA
D_CK_SCLK
+0.75VS
DDR_B_CKE1 <6>
DDR_B_CLK1 <6>
DDR_B_CLK1# <6>
DDR_B_CS0# <6>
DDR_B_ODT0 <6>
DDR_B_ODT1 <6>
<6> DDR_B_CKE0
<6> DDR_B_CLK0
<6> DDR_B_CLK0#
<6> DDR_B_CS1#
C2025 2.2U_0603_6.3V6K
C2026 0.1U_0402_16V4Z
C2041 2.2U_0603_6.3V4Z
C2042 0.1U_0402_16V4Z
+V_DDR_M1_REFB_CA
M1@ R2019 0_0402_5%
+V_DDR_M3_REFB
M3@ R2022 0_0402_5%
8/30
+3VS
R2014 10K_0402_5%
R2015 10K_0402_5%
C2049 2.2U_0603_6.3V4Z
C2050 0.1U_0402_16V4Z
SUYIN_600025HB204G256ZL
CONN@
10/9 Follow KAQ00, pin197
PU to +3VS
JDIMM3
<6> DDR_B_CKE2
<6> DDR_B_BS2
<6> DDR_B_CLK2
<6> DDR_B_CLK2#
<6> DDR_B_BS0
<6> DDR_B_WE#
<6> DDR_B_CAS#
<6> DDR_B_CS3#
DDR_B_CKE3 <6>
DDR_B_CLK3 <6>
DDR_B_CLK3# <6>
DDR_B_BS1 <6>
DDR_B_RAS# <6>
DDR_B_CS2# <6>
DDR_B_ODT2 <6>
DDR_B_ODT3 <6>
DDR3_DRAMRST# <6,11>
D_CK_SDATA <11,14,39>
D_CK_SCLK <11,14,39>
R2012 10K_0402_5%
R2013 10K_0402_5%
C2047 2.2U_0603_6.3V4Z
C2048 0.1U_0402_16V4Z
LCN_DAN06-K4406-0103
R2023 1K_0402_1%
R2024 1K_0402_1%
R2010 1K_0402_1%
R2011 1K_0402_1%
DDR_B_DQS#[0..7] <6>
DDR_B_DQS[0..7] <6>
DDR_B_D[0..63] <6>
DDR_B_MA[0..15] <6>
C2027 1U_0402_6.3V6K
C2028 1U_0402_6.3V6K
C2029 1U_0402_6.3V6K
C2030 1U_0402_6.3V6K
Layout Note: Place near JDIMMB
C2032 10U_0603_6.3V6M
C2033 10U_0603_6.3V6M
C2034 10U_0603_6.3V6M
C2035 10U_0603_6.3V6M
C2036 10U_0603_6.3V6M
C2037 10U_0603_6.3V6M
C2038 @ 330U_D2_2V_Y
C2031
C2039 2.2U_0603_6.3V4Z
C2040 0.1U_0402_16V4Z
Layout Note: Place near JDIMMB.203,204
C2043 1U_0402_6.3V6K
C2044 1U_0402_6.3V6K
C2045 1U_0402_6.3V6K
C2046 1U_0402_6.3V6K
DDR_B_DM0
DDR_B_DM1
DDR_B_DM2
DDR_B_DM3
DDR_B_DM4
DDR_B_DM5
DDR_B_DM6
DDR_B_DM7
DDR3 SO-DIMM B
Reverse Type
Security Classification
Compal Secret Data
Issued Date
2009/08/25
Deciphered Date
2010/08/25
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.
Compal Electronics, Inc.
Title
DDRIII-SODIMM SLOT2
Size
Document Number
LA-6931P
Rev
1.0
Date: Wednesday, October 27, 2010
Sheet 12 of 58

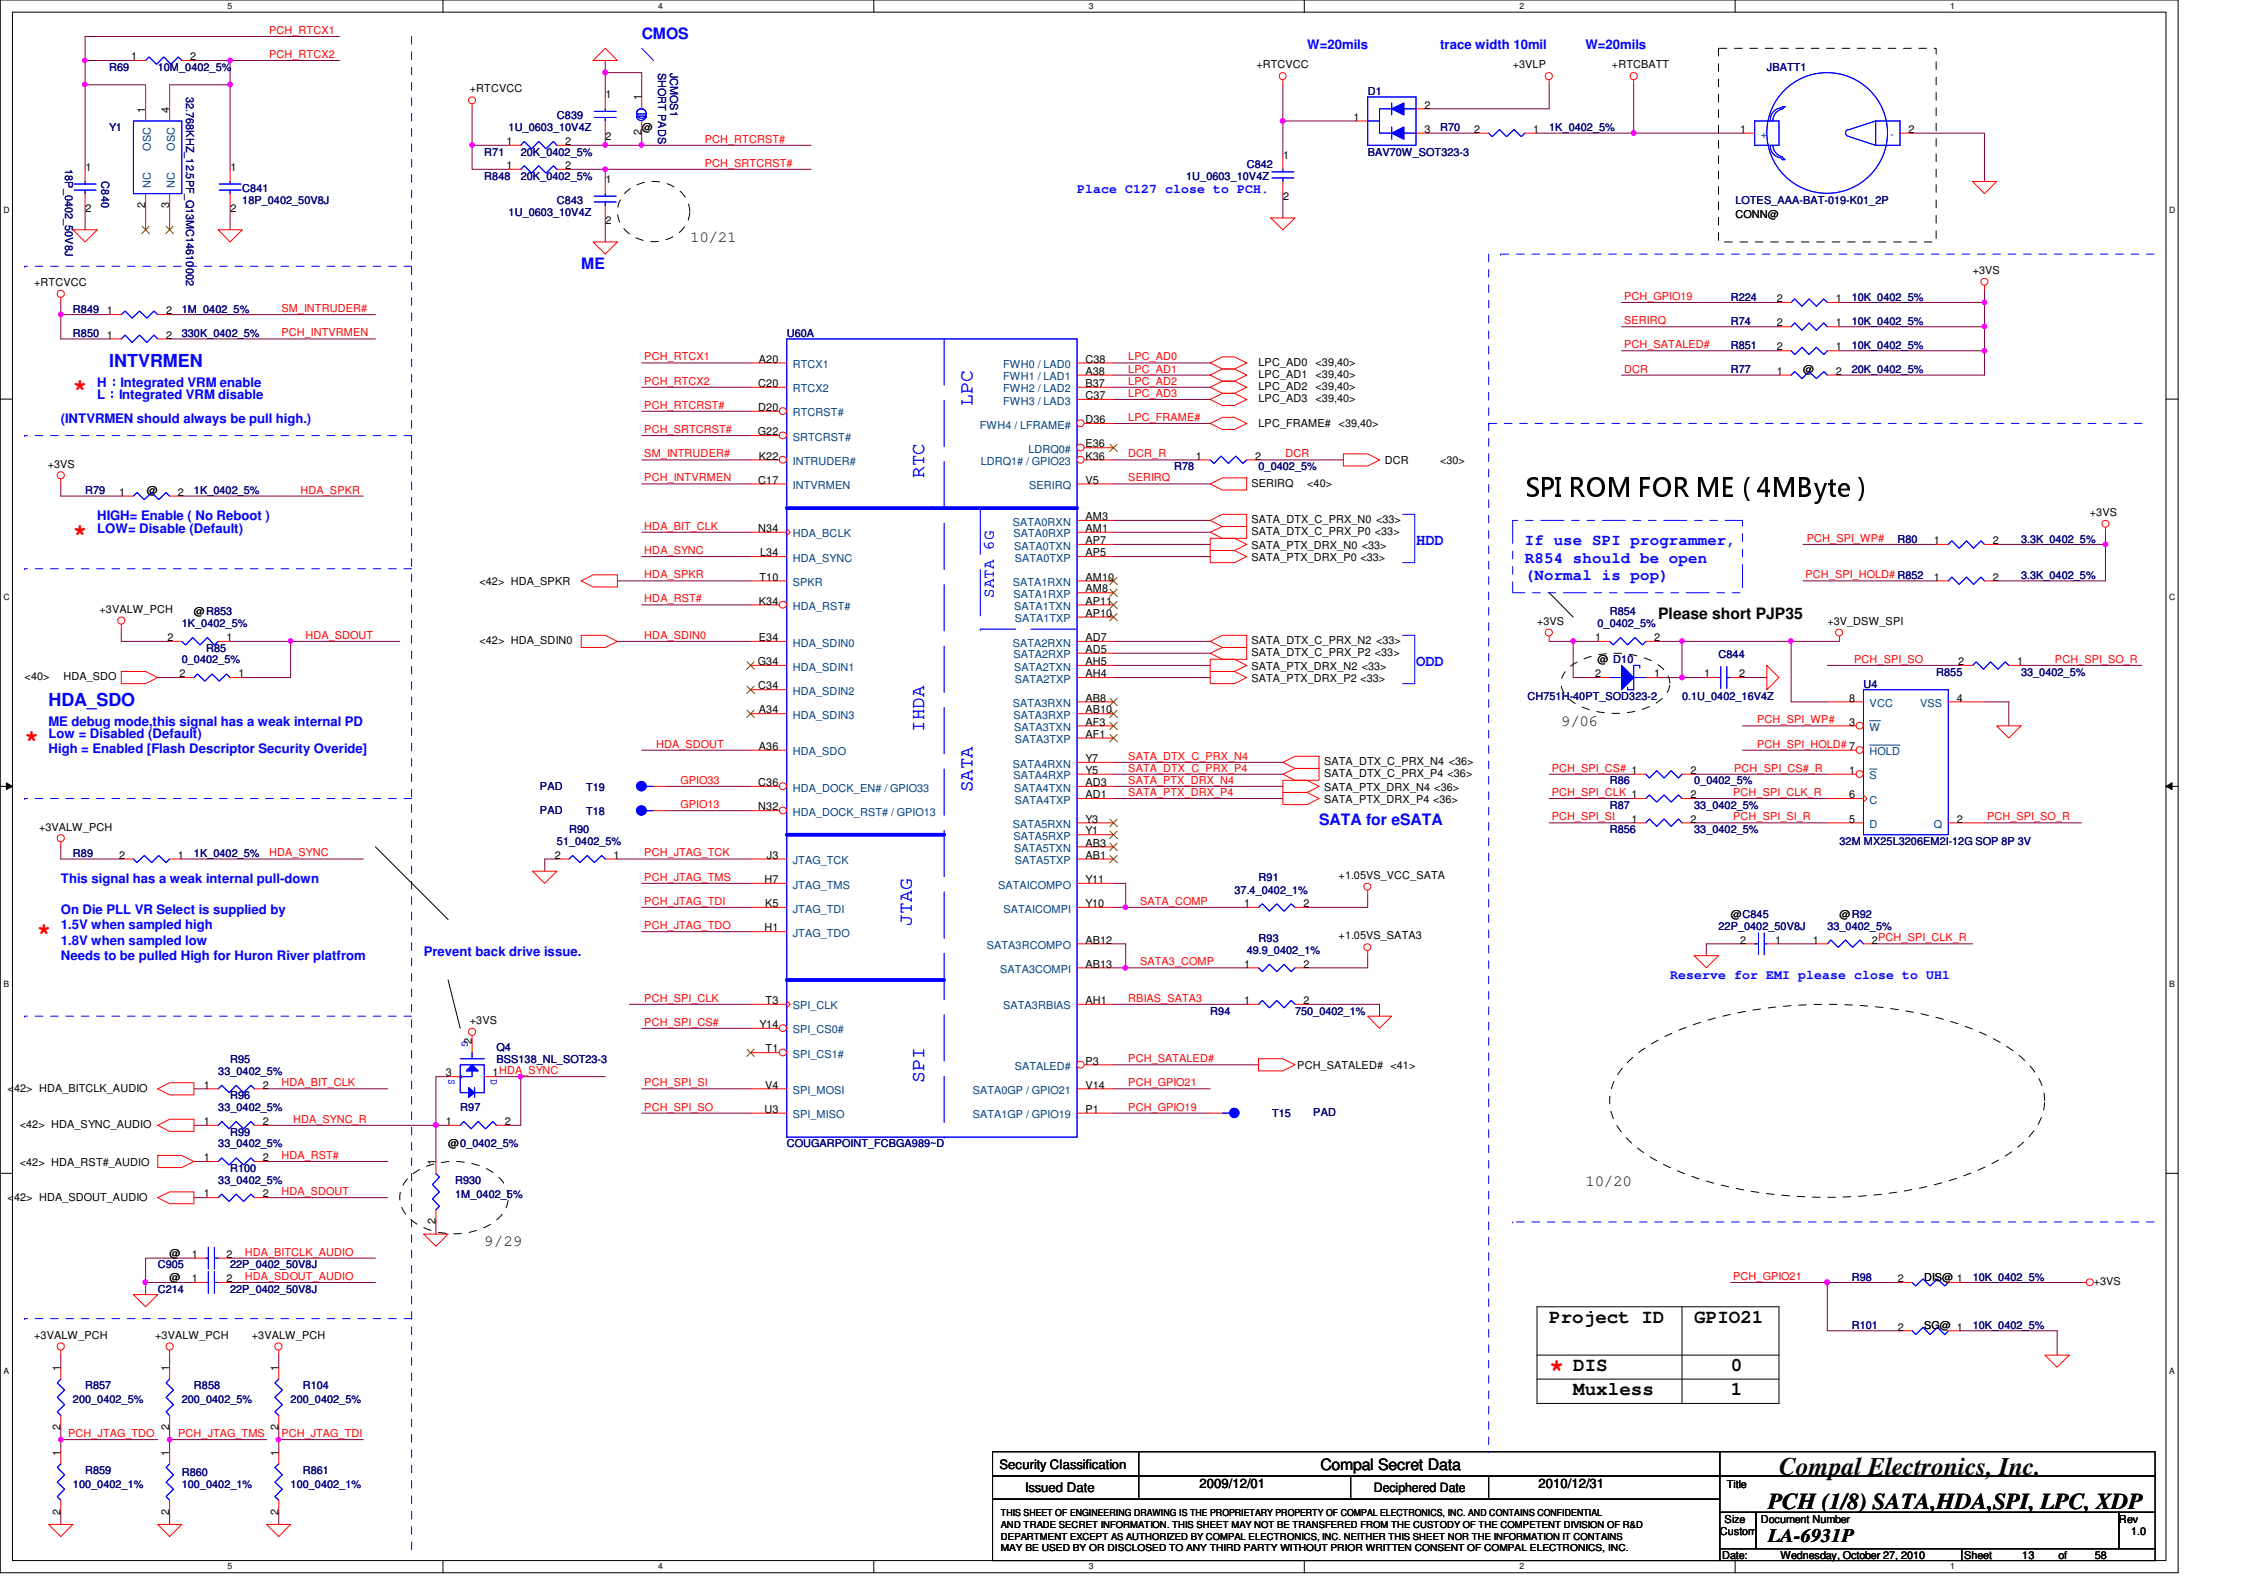

Project ID	GPIO21
* DIS	0
Muxless	1

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PCH (1/8) SATA,HDA,SPI, LPC, XDP

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 | Sheet 13 of 58

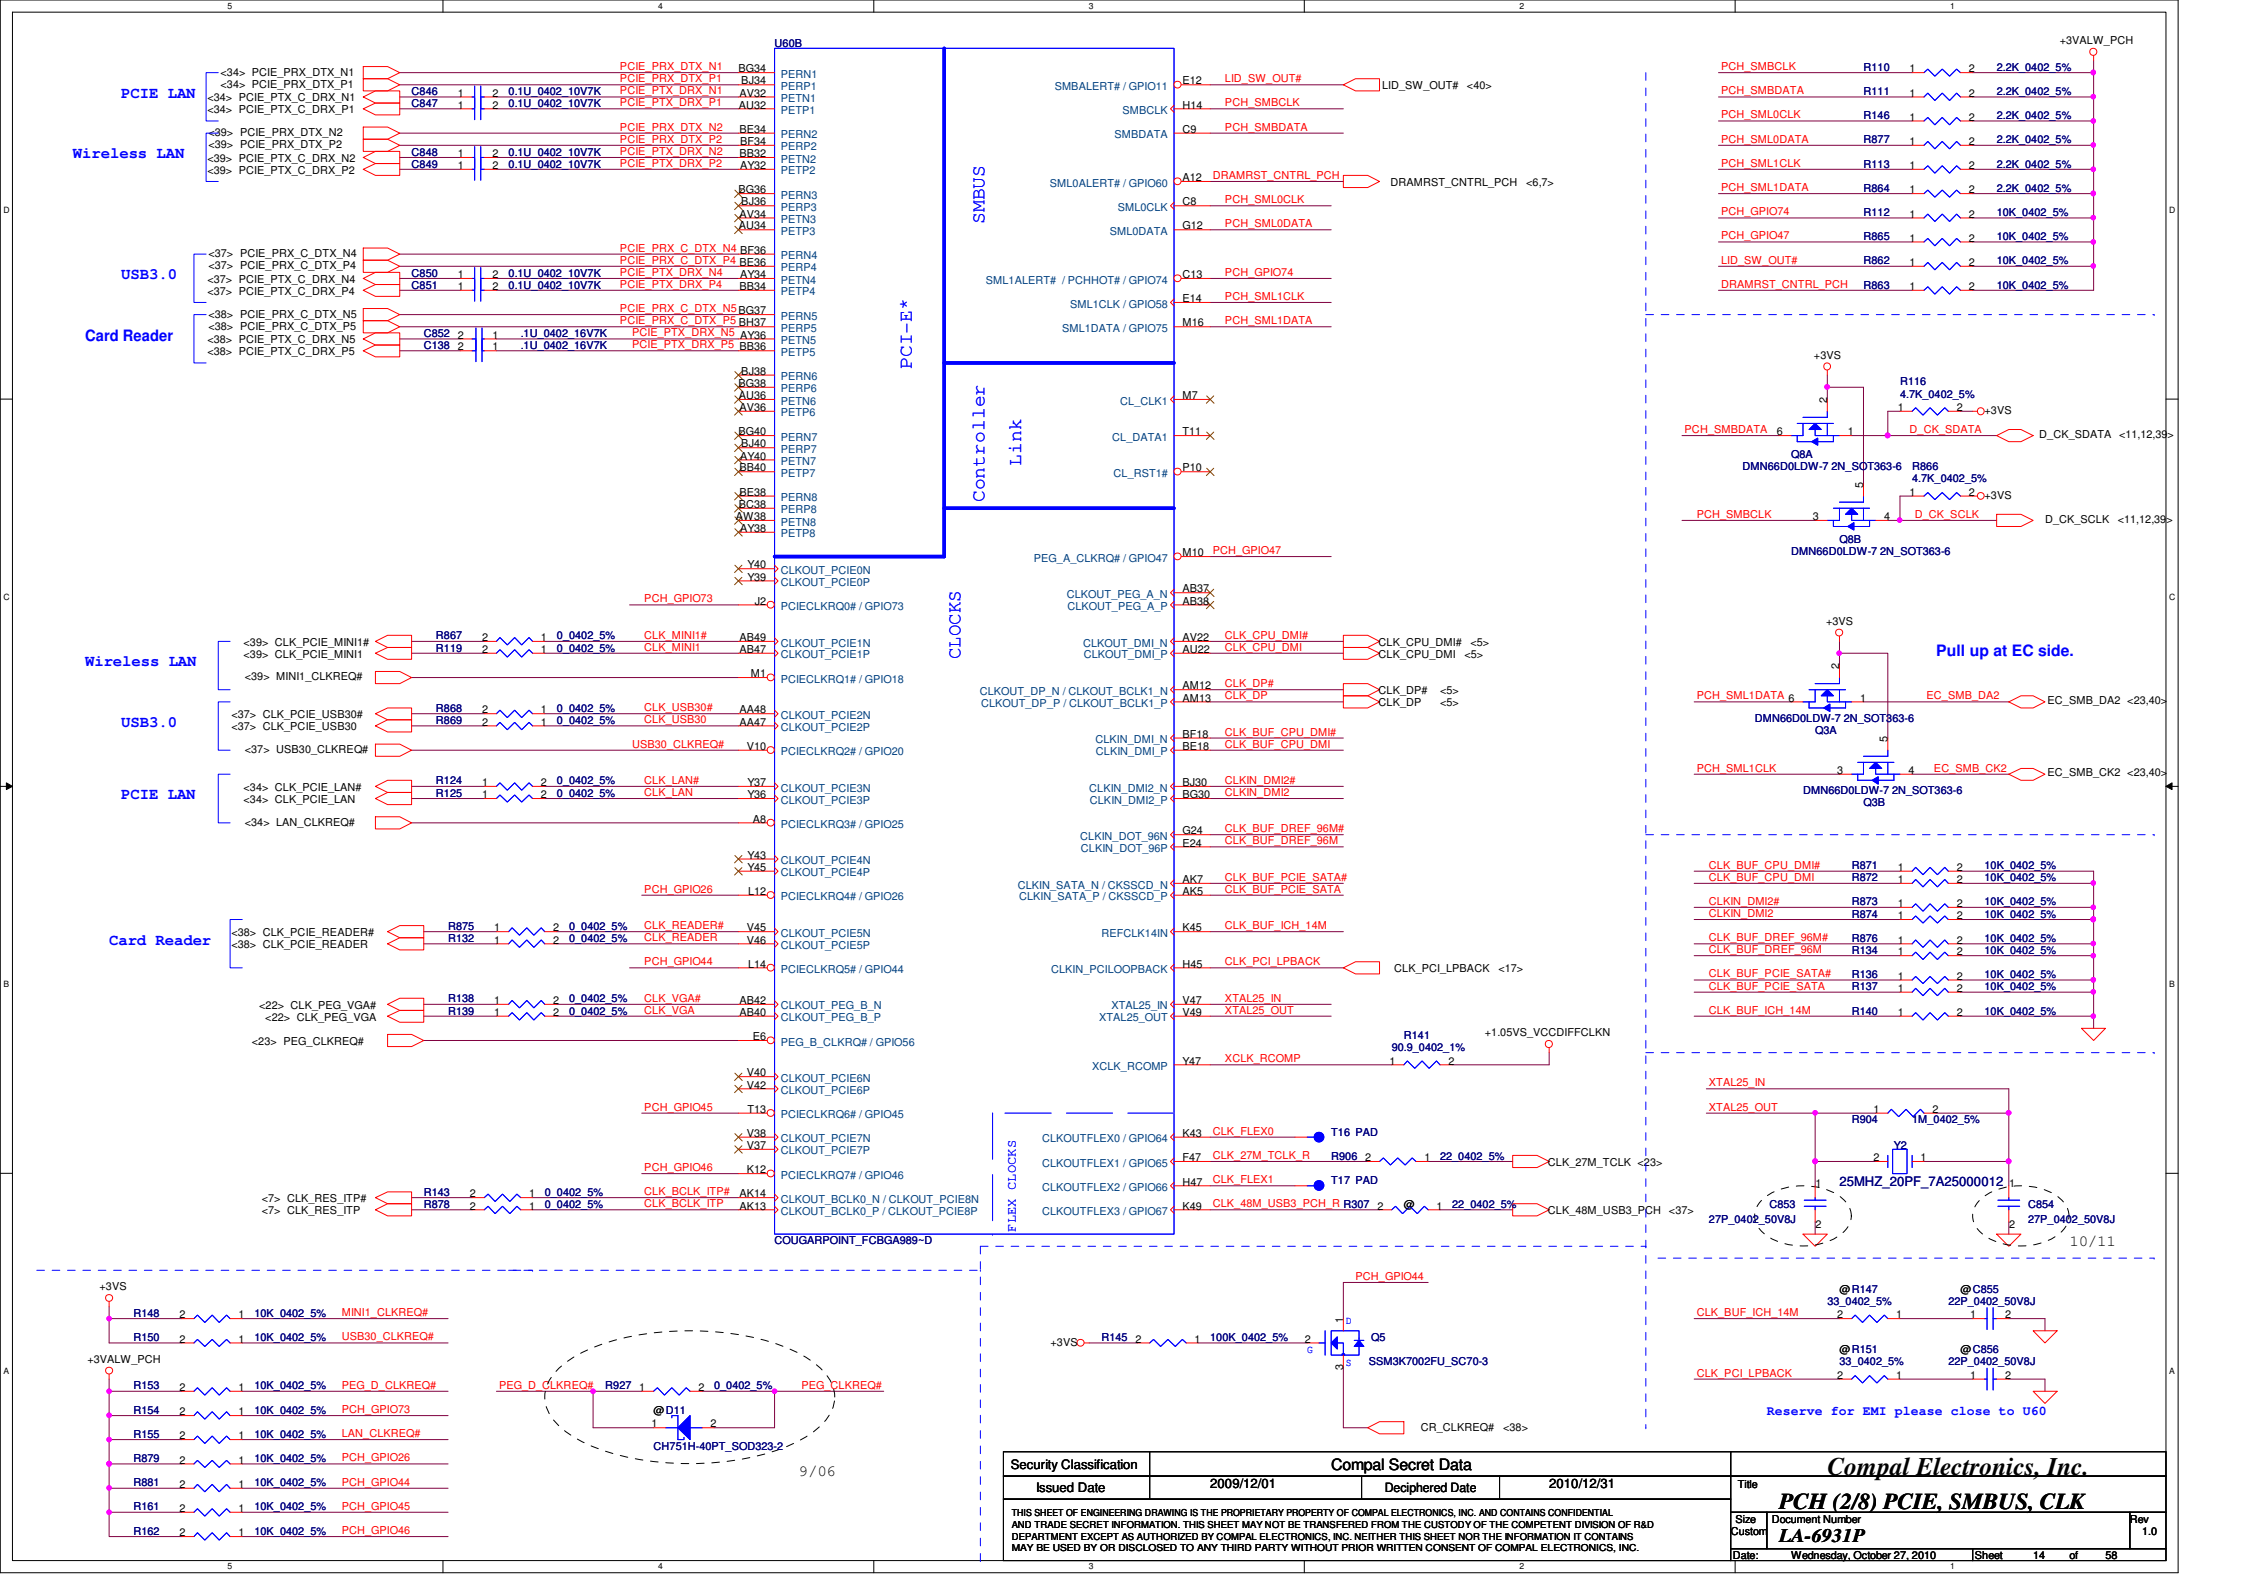
U60B
PCIE LAN
Wireless LAN
USB3.0
Card Reader
PCI-E*
SMBUS
Controller Link
CLOCKS
FLEX CLOCKS
COUGARPOINT_FCBGA989~D
Pull up at EC side.
Reserve for EMI please close to U60
Compal Secret Data
Compal Electronics, Inc.
PCH (2/8) PCIE, SMBUS, CLK
LA-6931P
Rev 1.0
Wednesday, October 27, 2010
Sheet 14 of 58
2009/12/01
2010/12/31
9/06
10/11

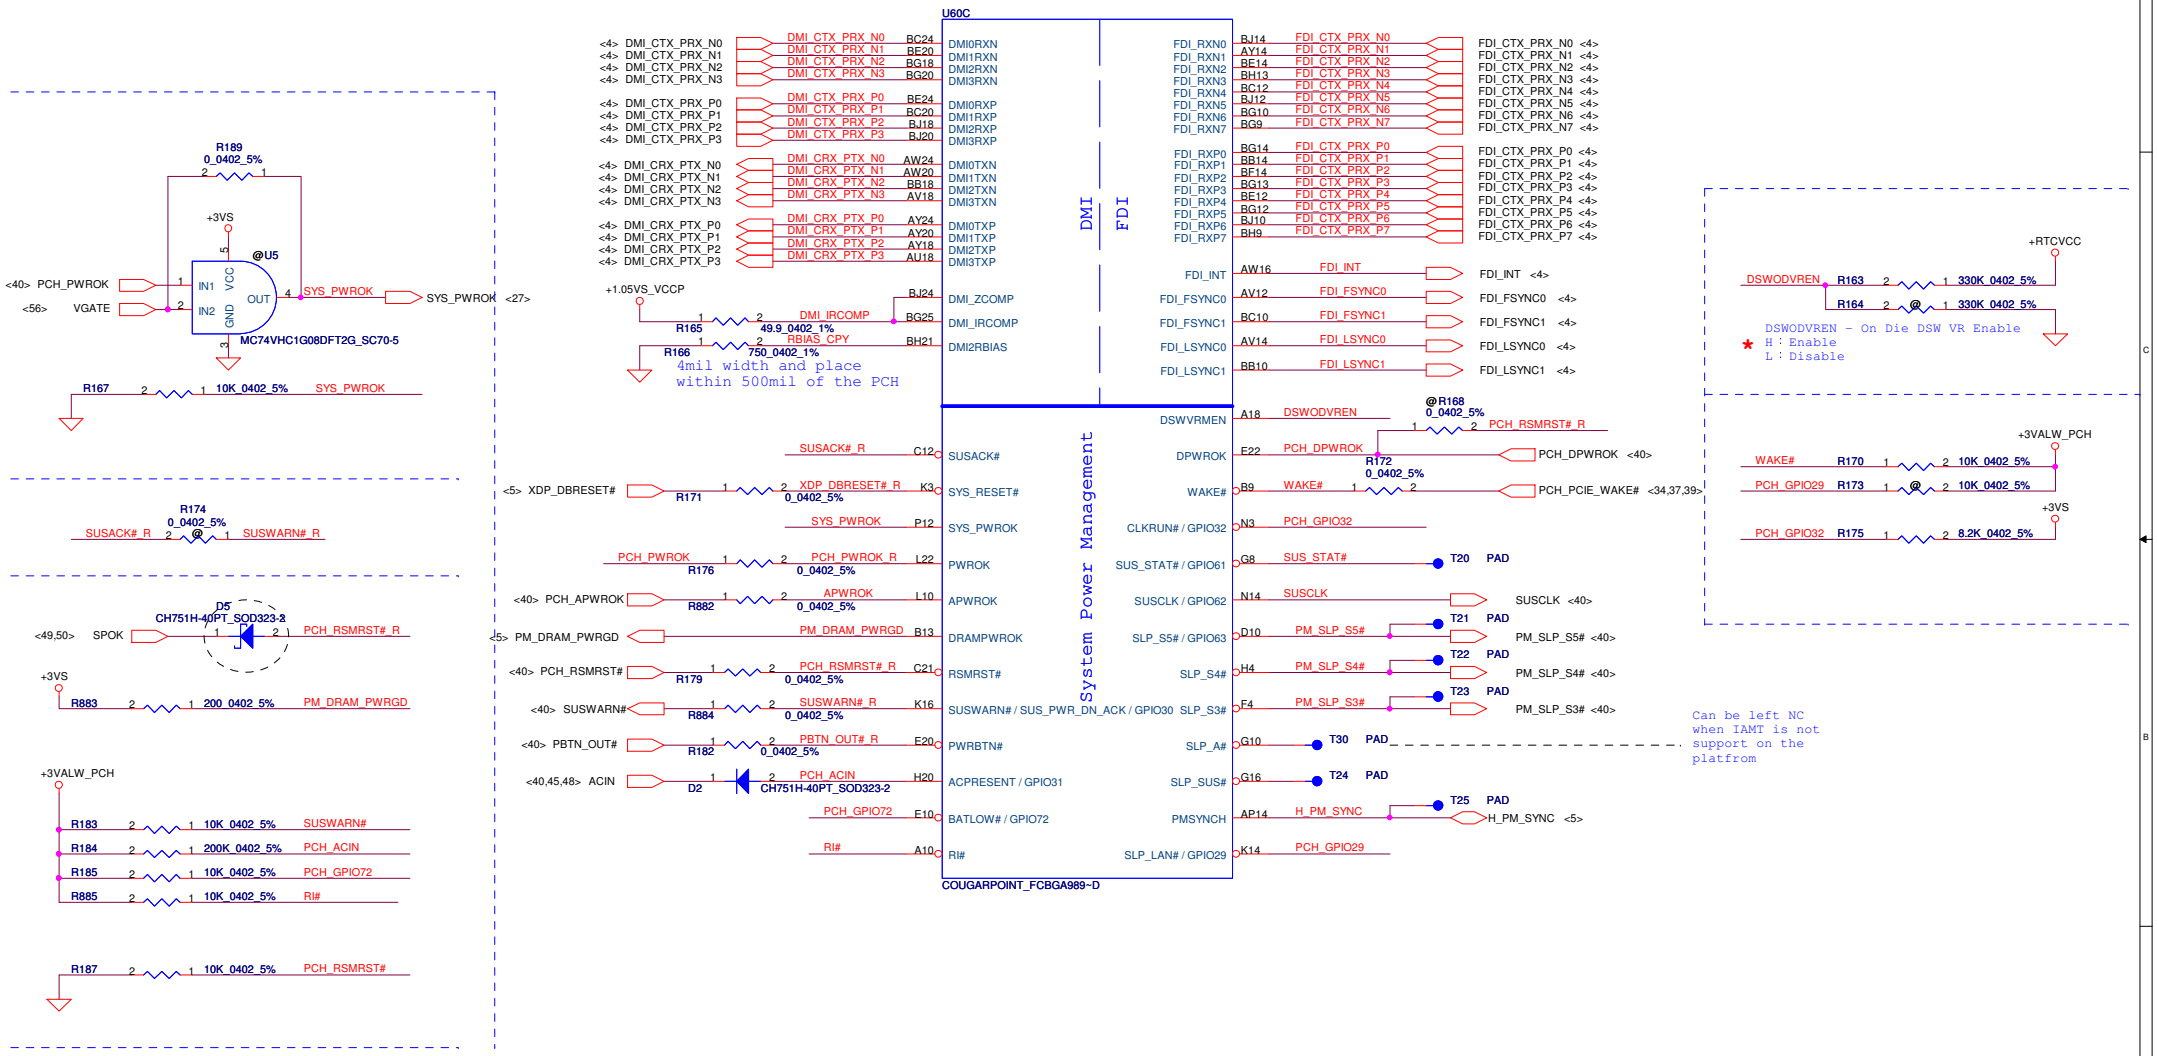

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PCH (3/8) DMI,FDI,PM,

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 15 of 58

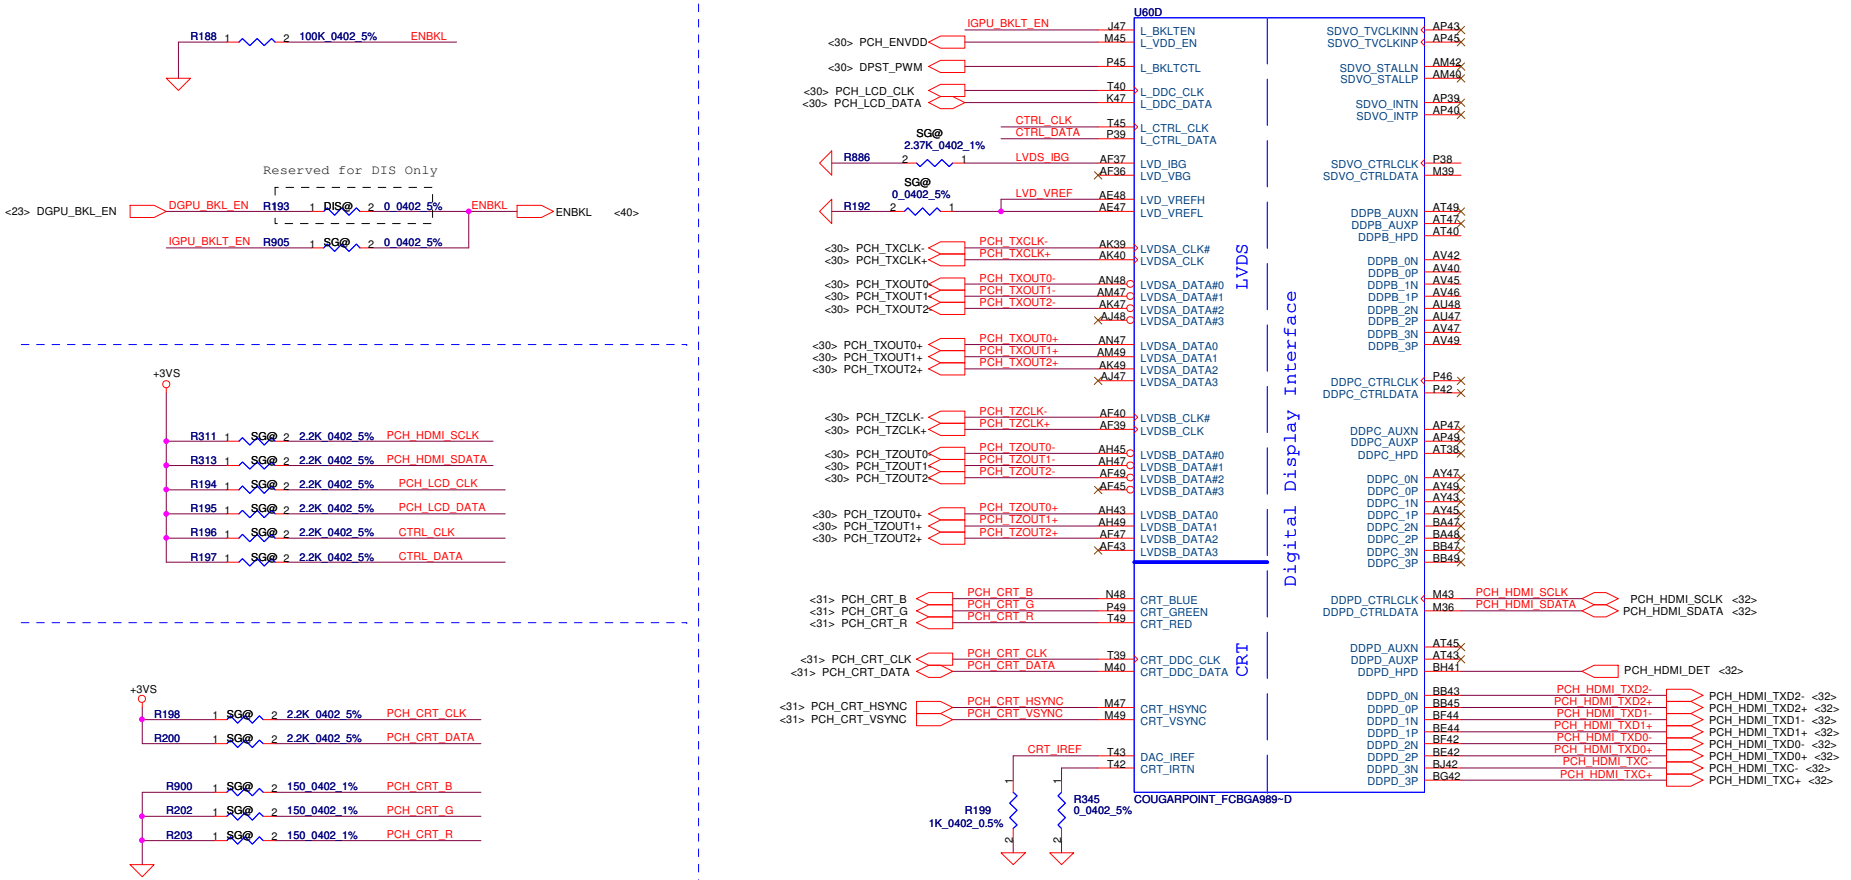

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PCH (4/9) LVDS,CRT,DP,HDMI

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 16 of 58

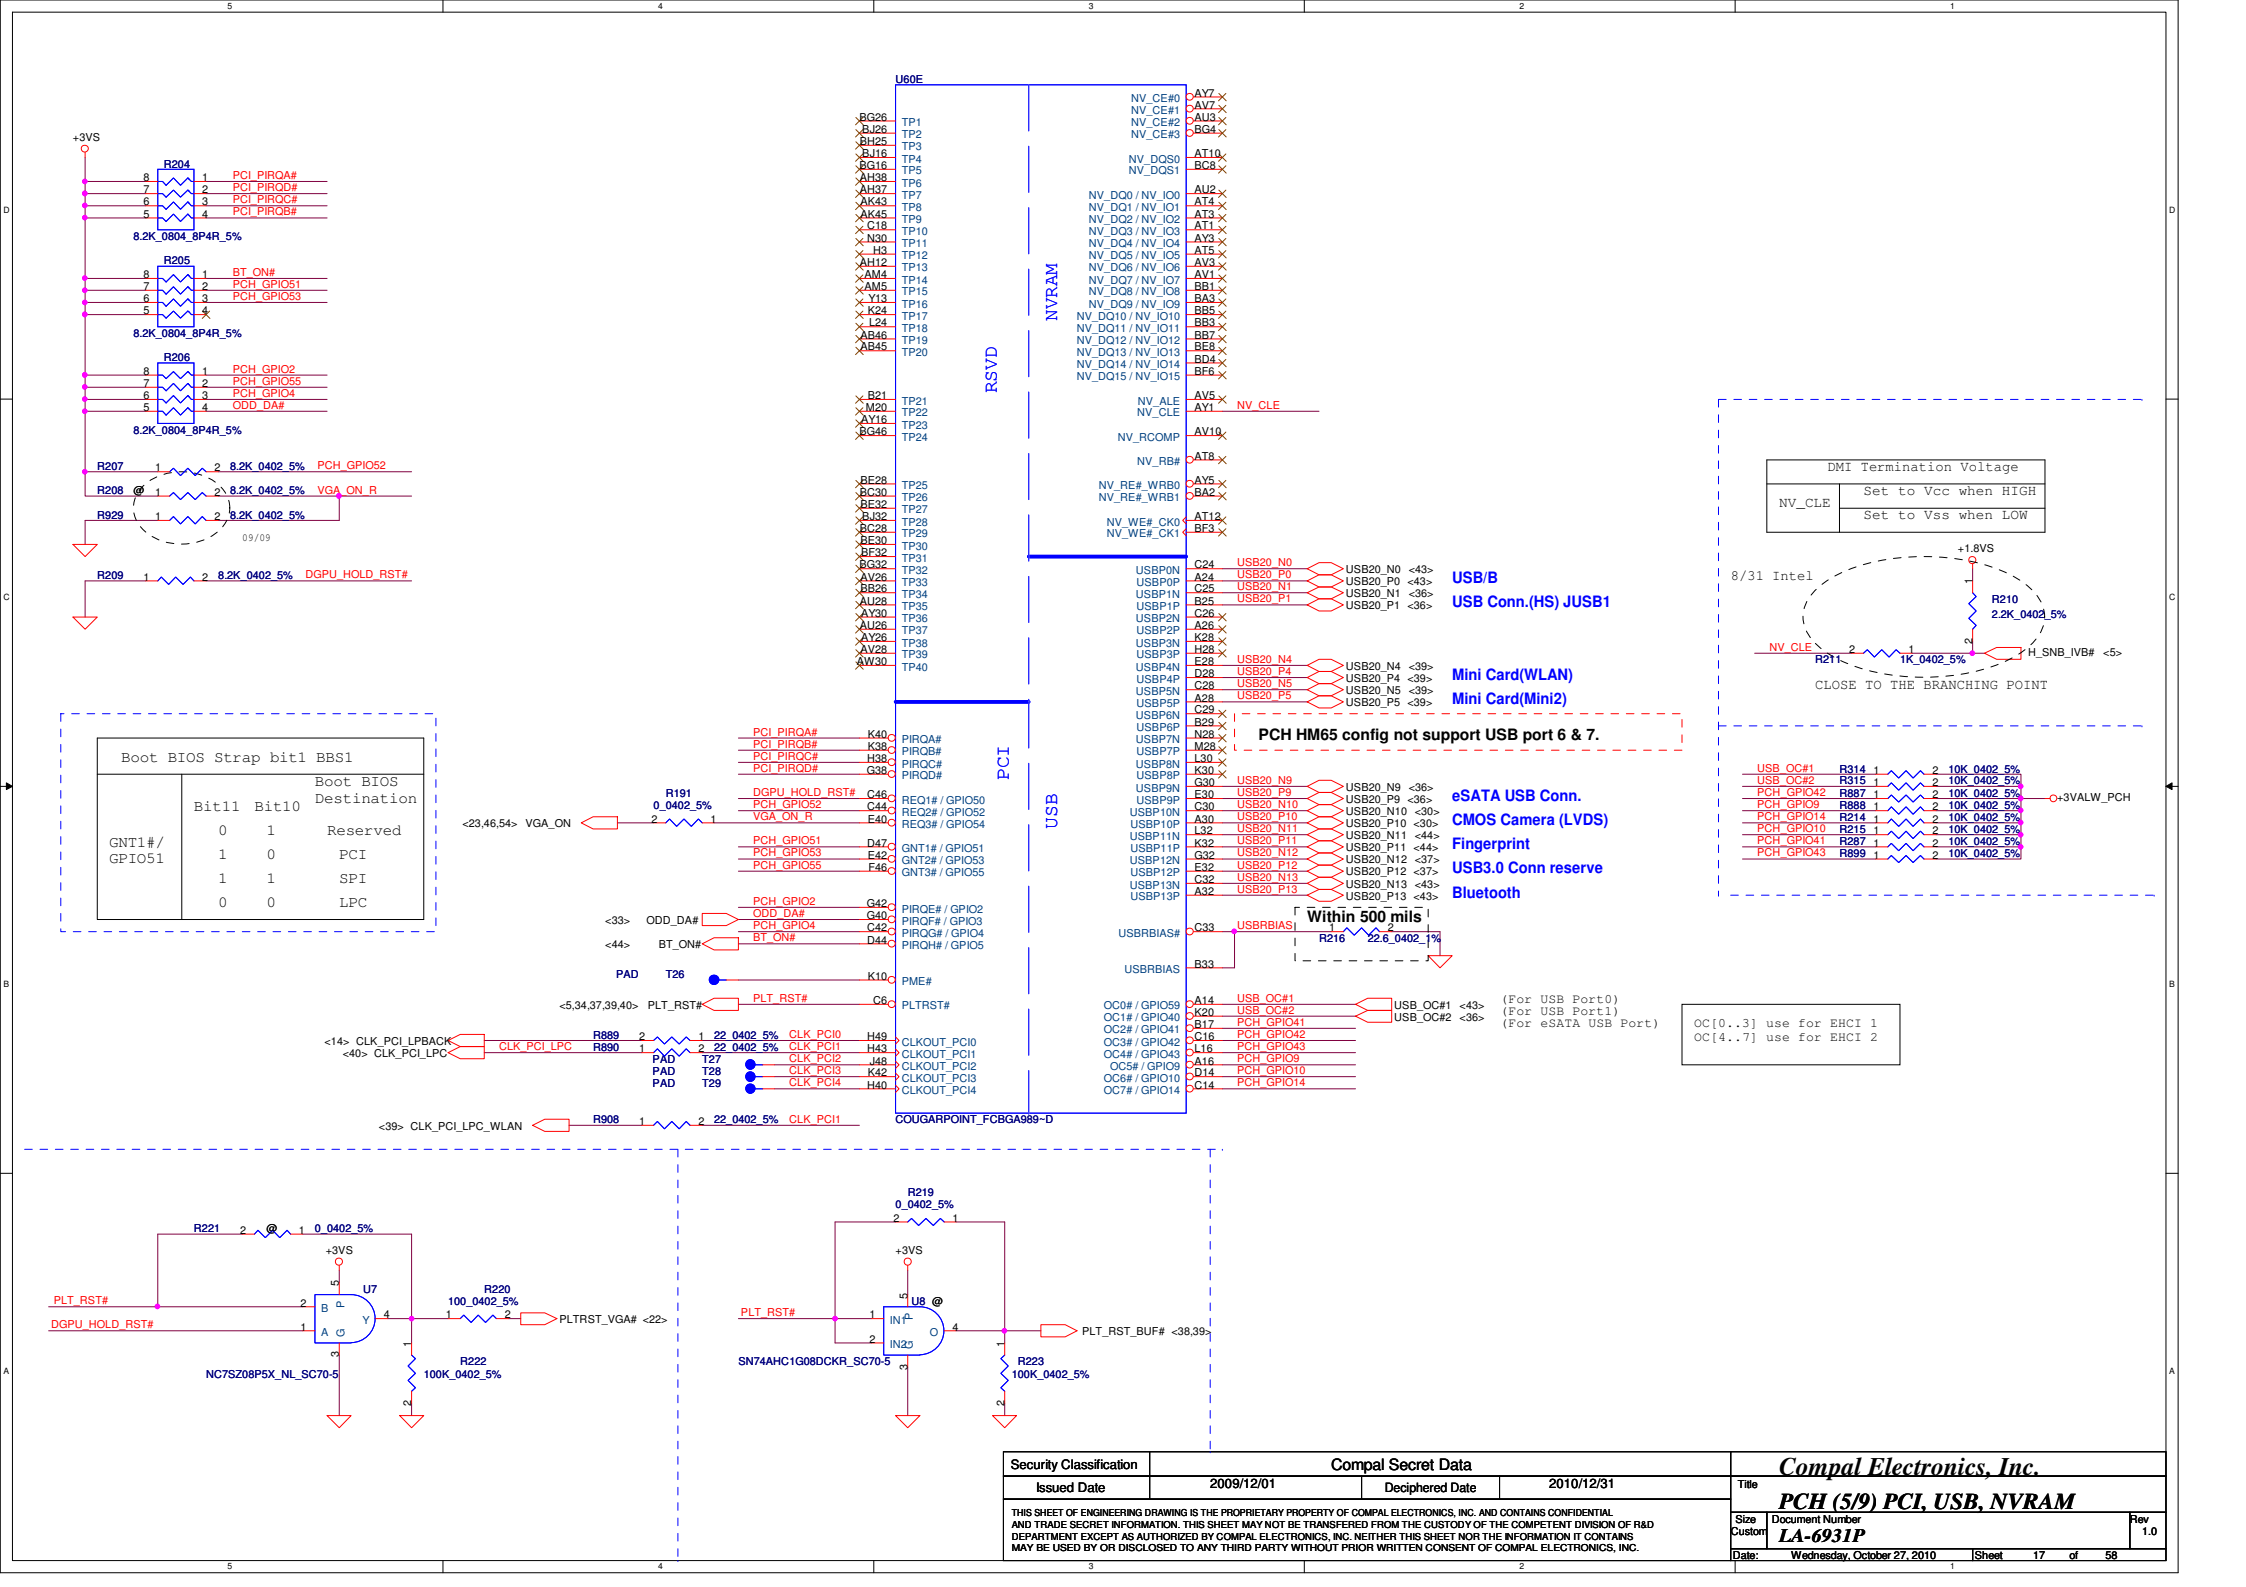

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.			
Title: PCH (5/9) PCI, USB, NVRAM			
Size: Custom	Document Number: LA-6931P		Rev: 1.0
Date: Wednesday, October 27, 2010	Sheet 17 of 58		

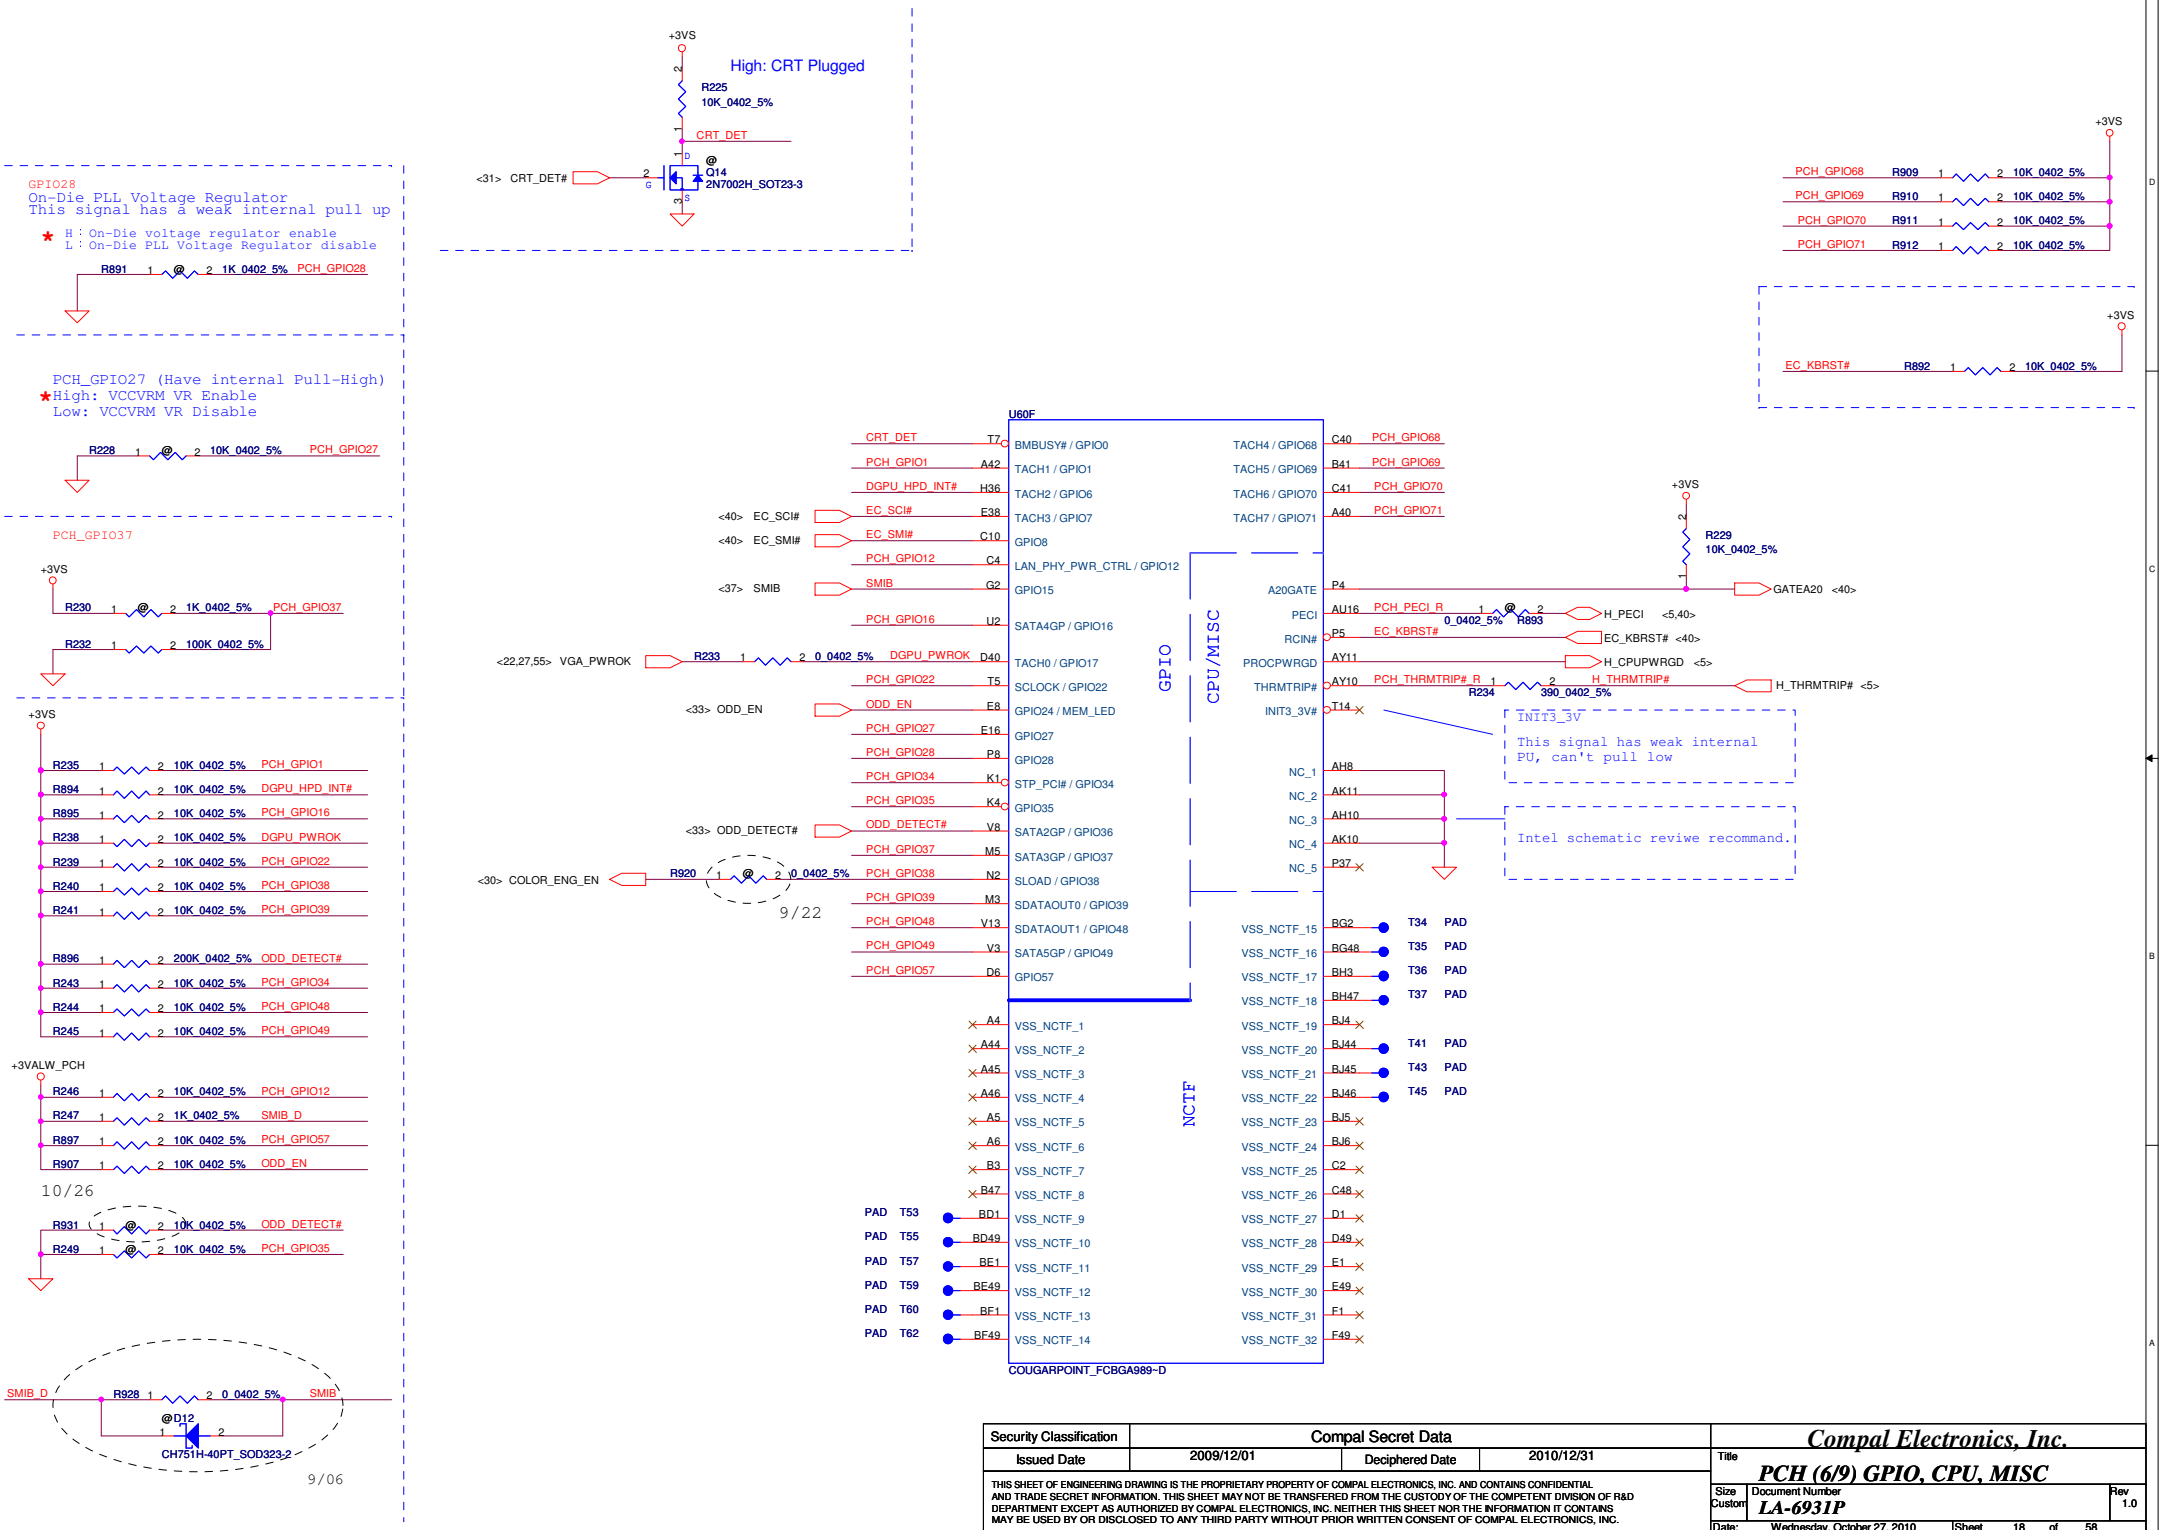

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PCH (6/9) GPIO, CPU, MISC

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 18 of 58

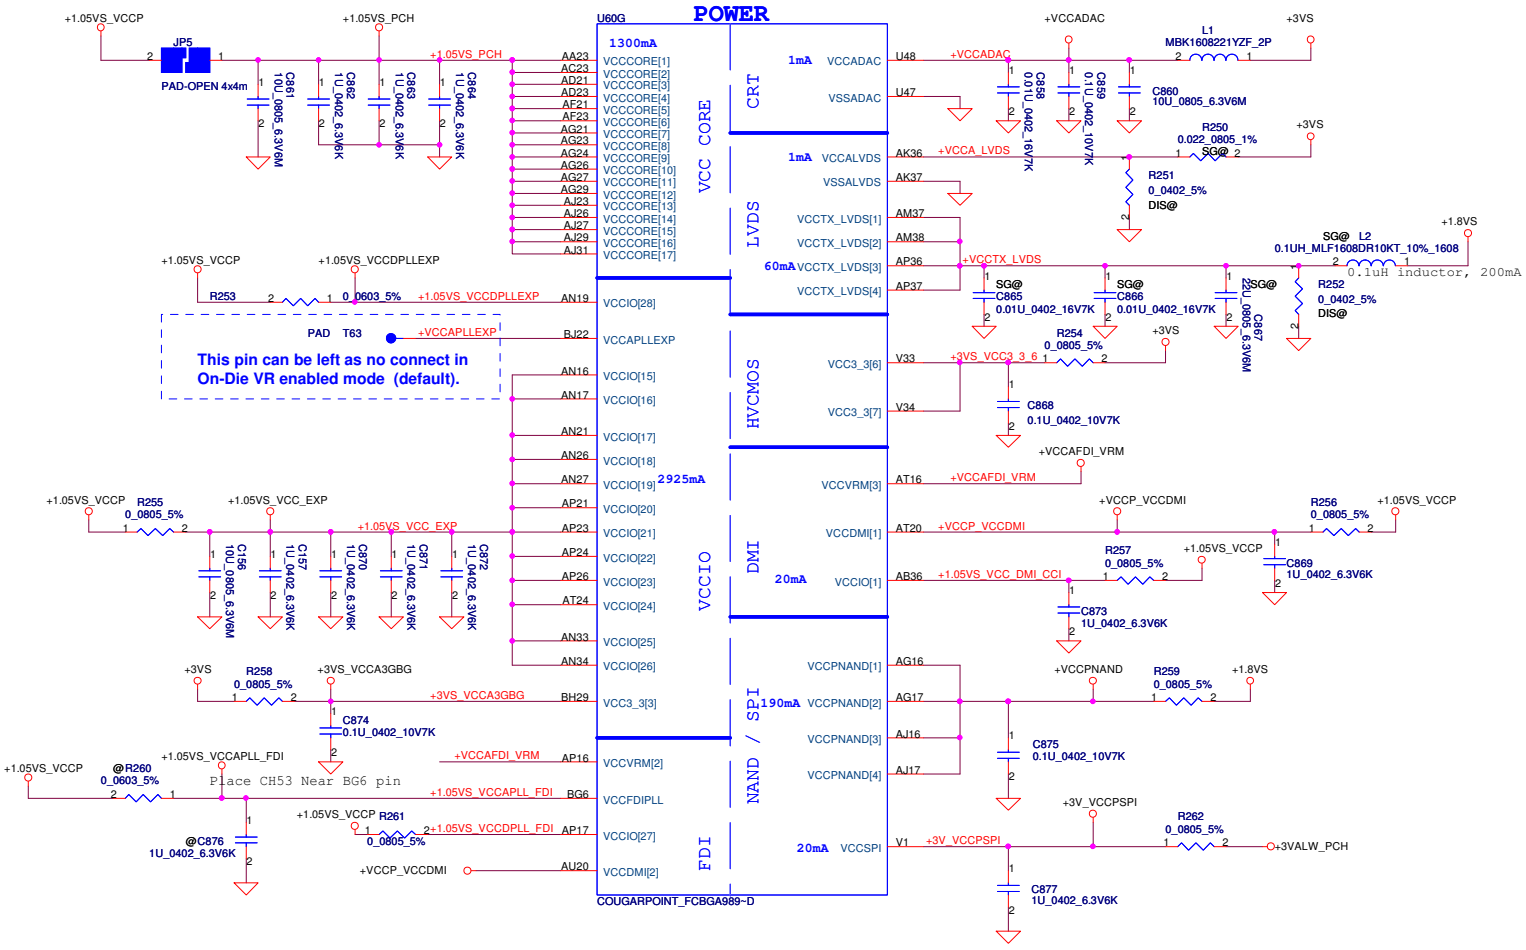

PCH Power Rail Table

Voltage Rail	Voltage	S0 Iccmax Current (A)
V_PROC_IO	1.05	0.001
V5REF	5	0.001
V5REF_Sus	5	0.001
Vcc3_3	3.3	0.266
VccADAC	3.3	0.001
VccADPLLA	1.05	0.08
VccADPLLB	1.05	0.08
VccCore	1.05	1.3
VccDMI	1.05	0.042
VccIO	1.05	2.925
VccASW	1.05	1.01
VccSPI	3.3	0.02
VccDSW	3.3	0.003
VccpNAND	1.8	0.19
VccRTC	3.3	6 uA
VccSus3_3	3.3	0.119
VccSusHDA	3.3 / 1.5	0.01
VccVRM	1.8 / 1.5	0.16
VccCLKDMI	1.05	0.02
VccSSC	1.05	0.095
VccDIFFCLKN	1.05	0.055
VccALVDS	3.3	0.001
VccTX_LVDS	1.8	0.06

Intel recommand
stuff RH197 and unstuff RH198

VCCVRM==>1.5V FOR MOBILE
VCCVRM==>1.8V FOR DESKTOP

VCCVRM = 160mA detal waiting for newest spec

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PCH (7/9) PWR

Size: Custom | Document Number: LA-6931P | Rev: 1.0

Date: Wednesday, October 27, 2010 | Sheet 19 of 58

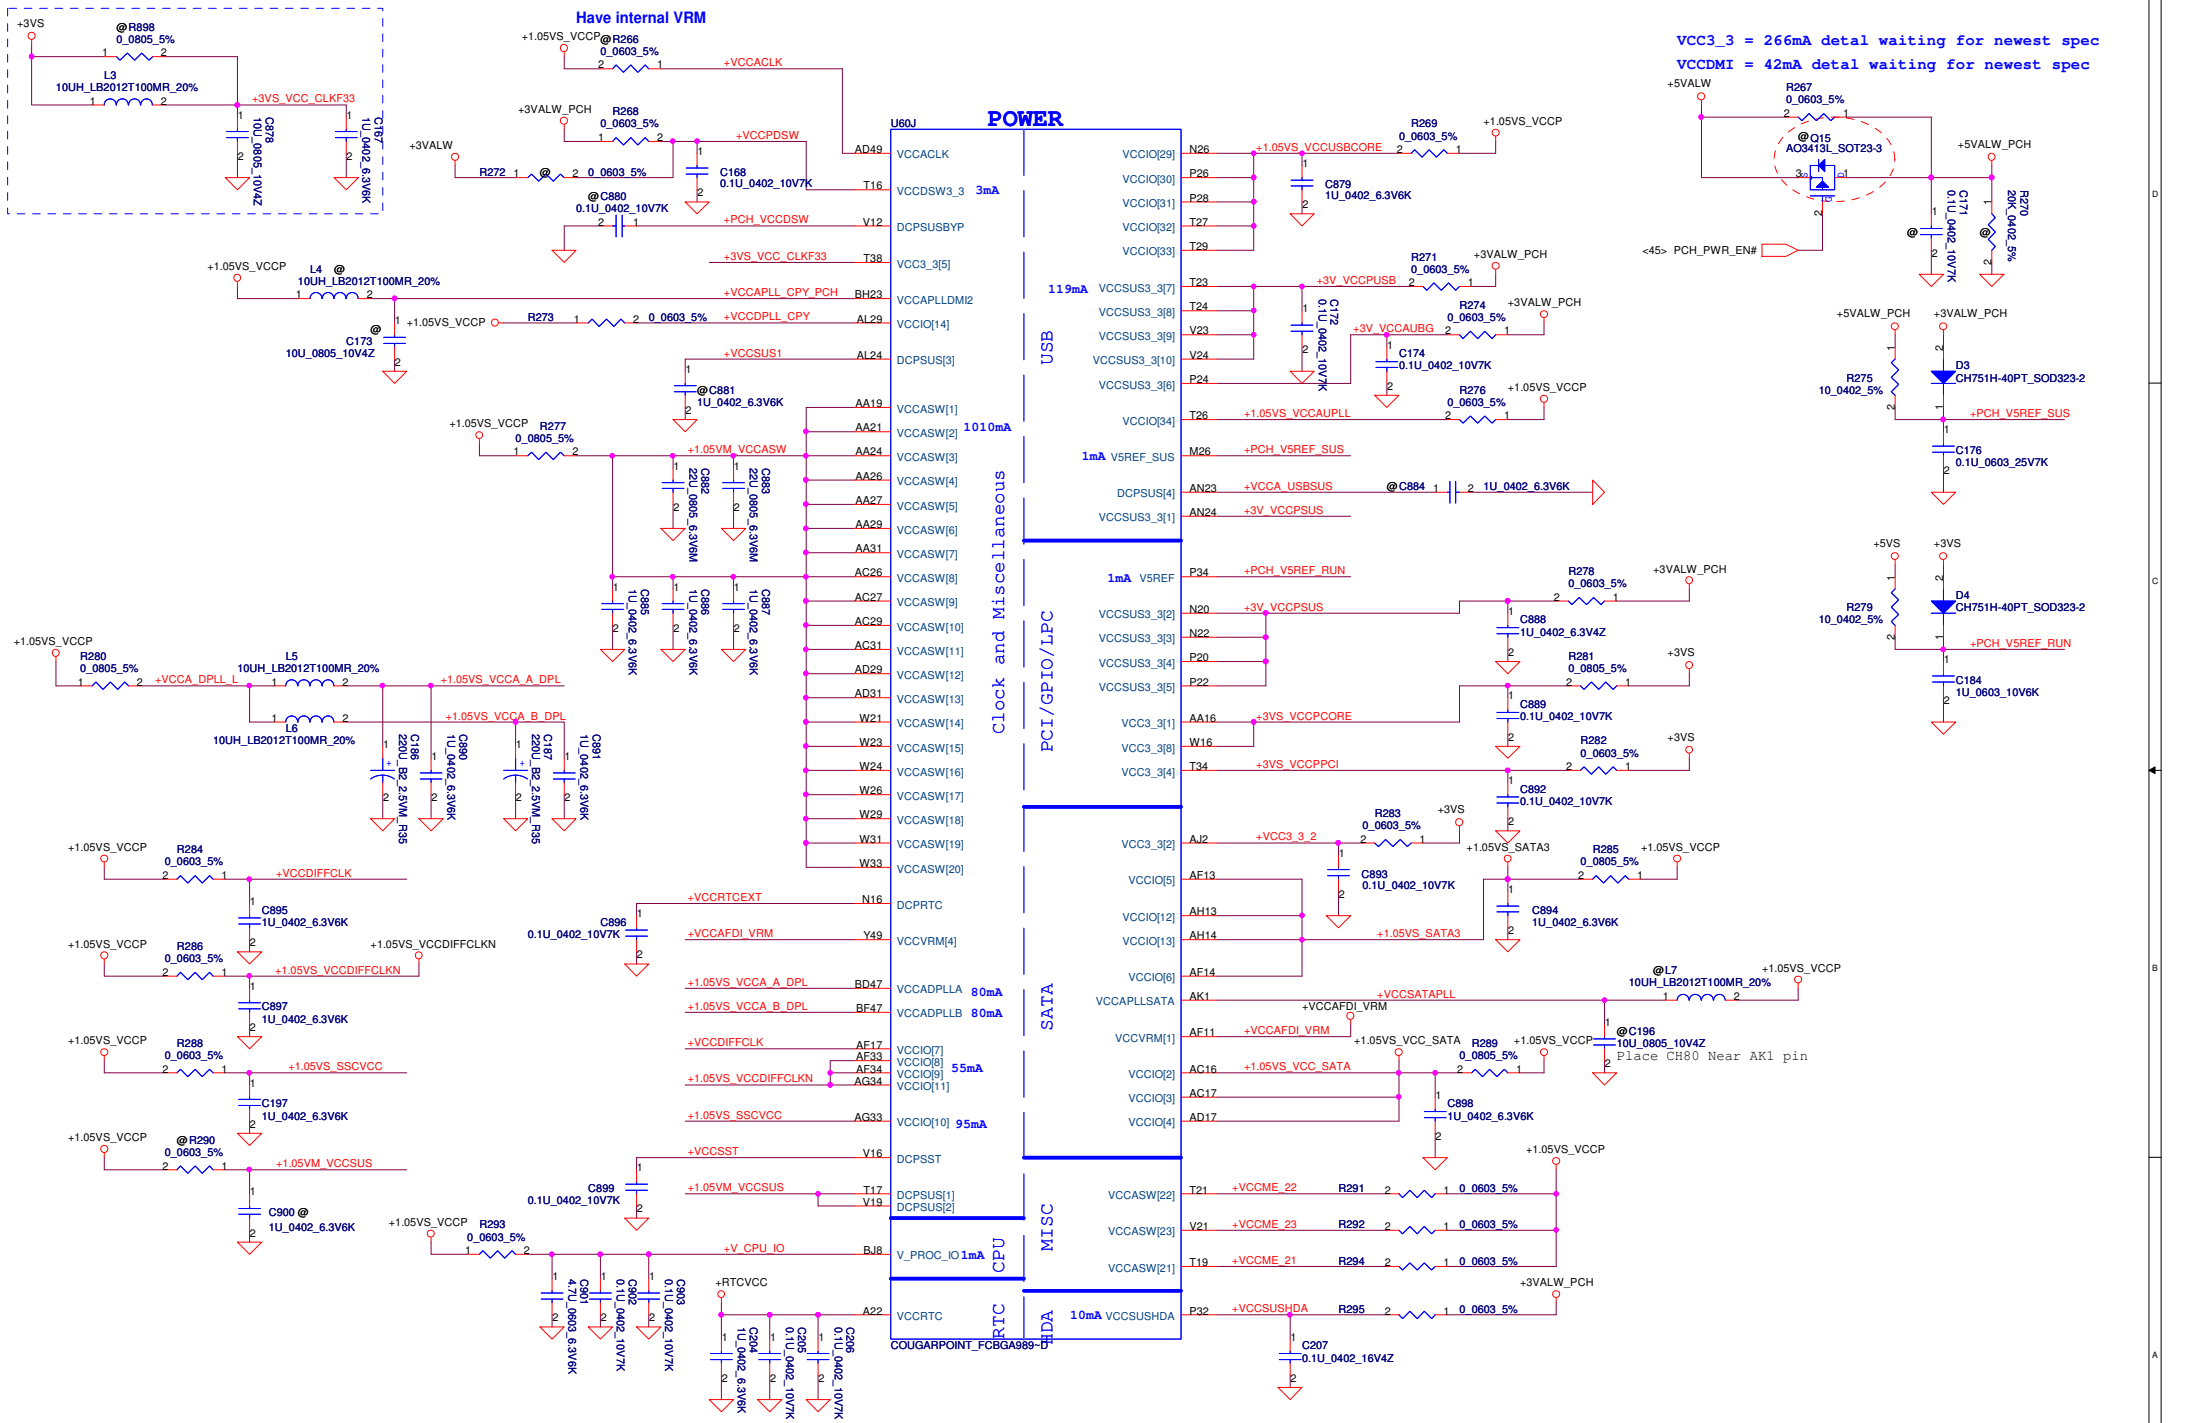

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.			
Title: PCH (8/9) PWR			
Size: Custom	Document Number: LA-6931P		Rev: 1.0
Date: Wednesday, October 27, 2010	Sheet 20 of 58		

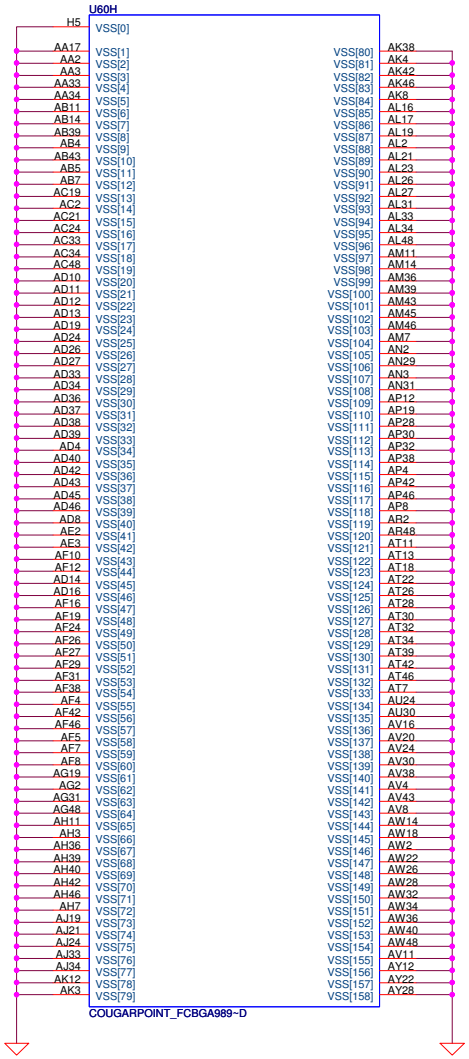

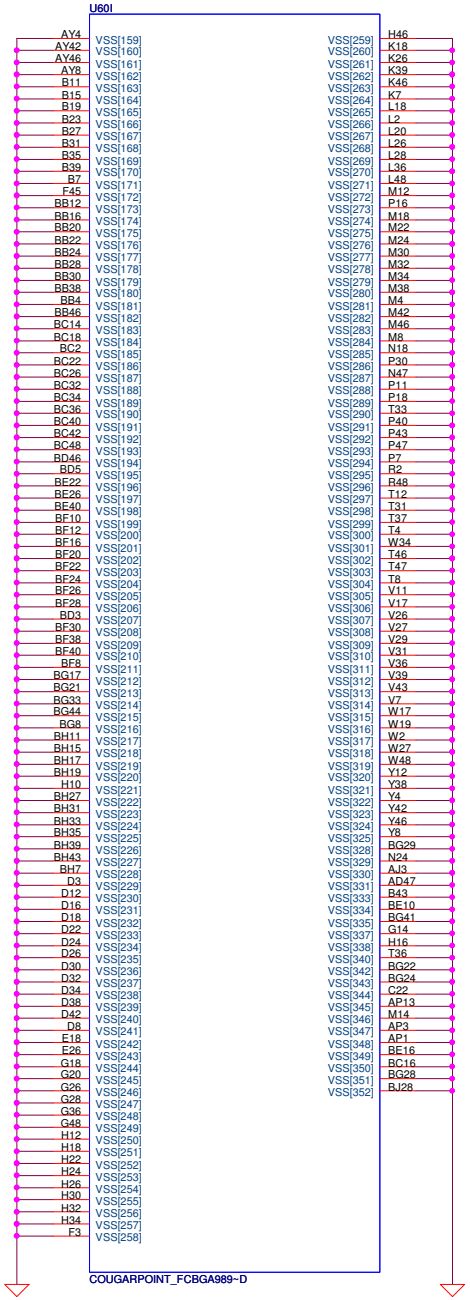

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PCH (9/9) VSS

Size: Custom | Document Number: LA-6931P | Rev: 1.0

Date: Wednesday, October 27, 2010 | Sheet 21 of 58

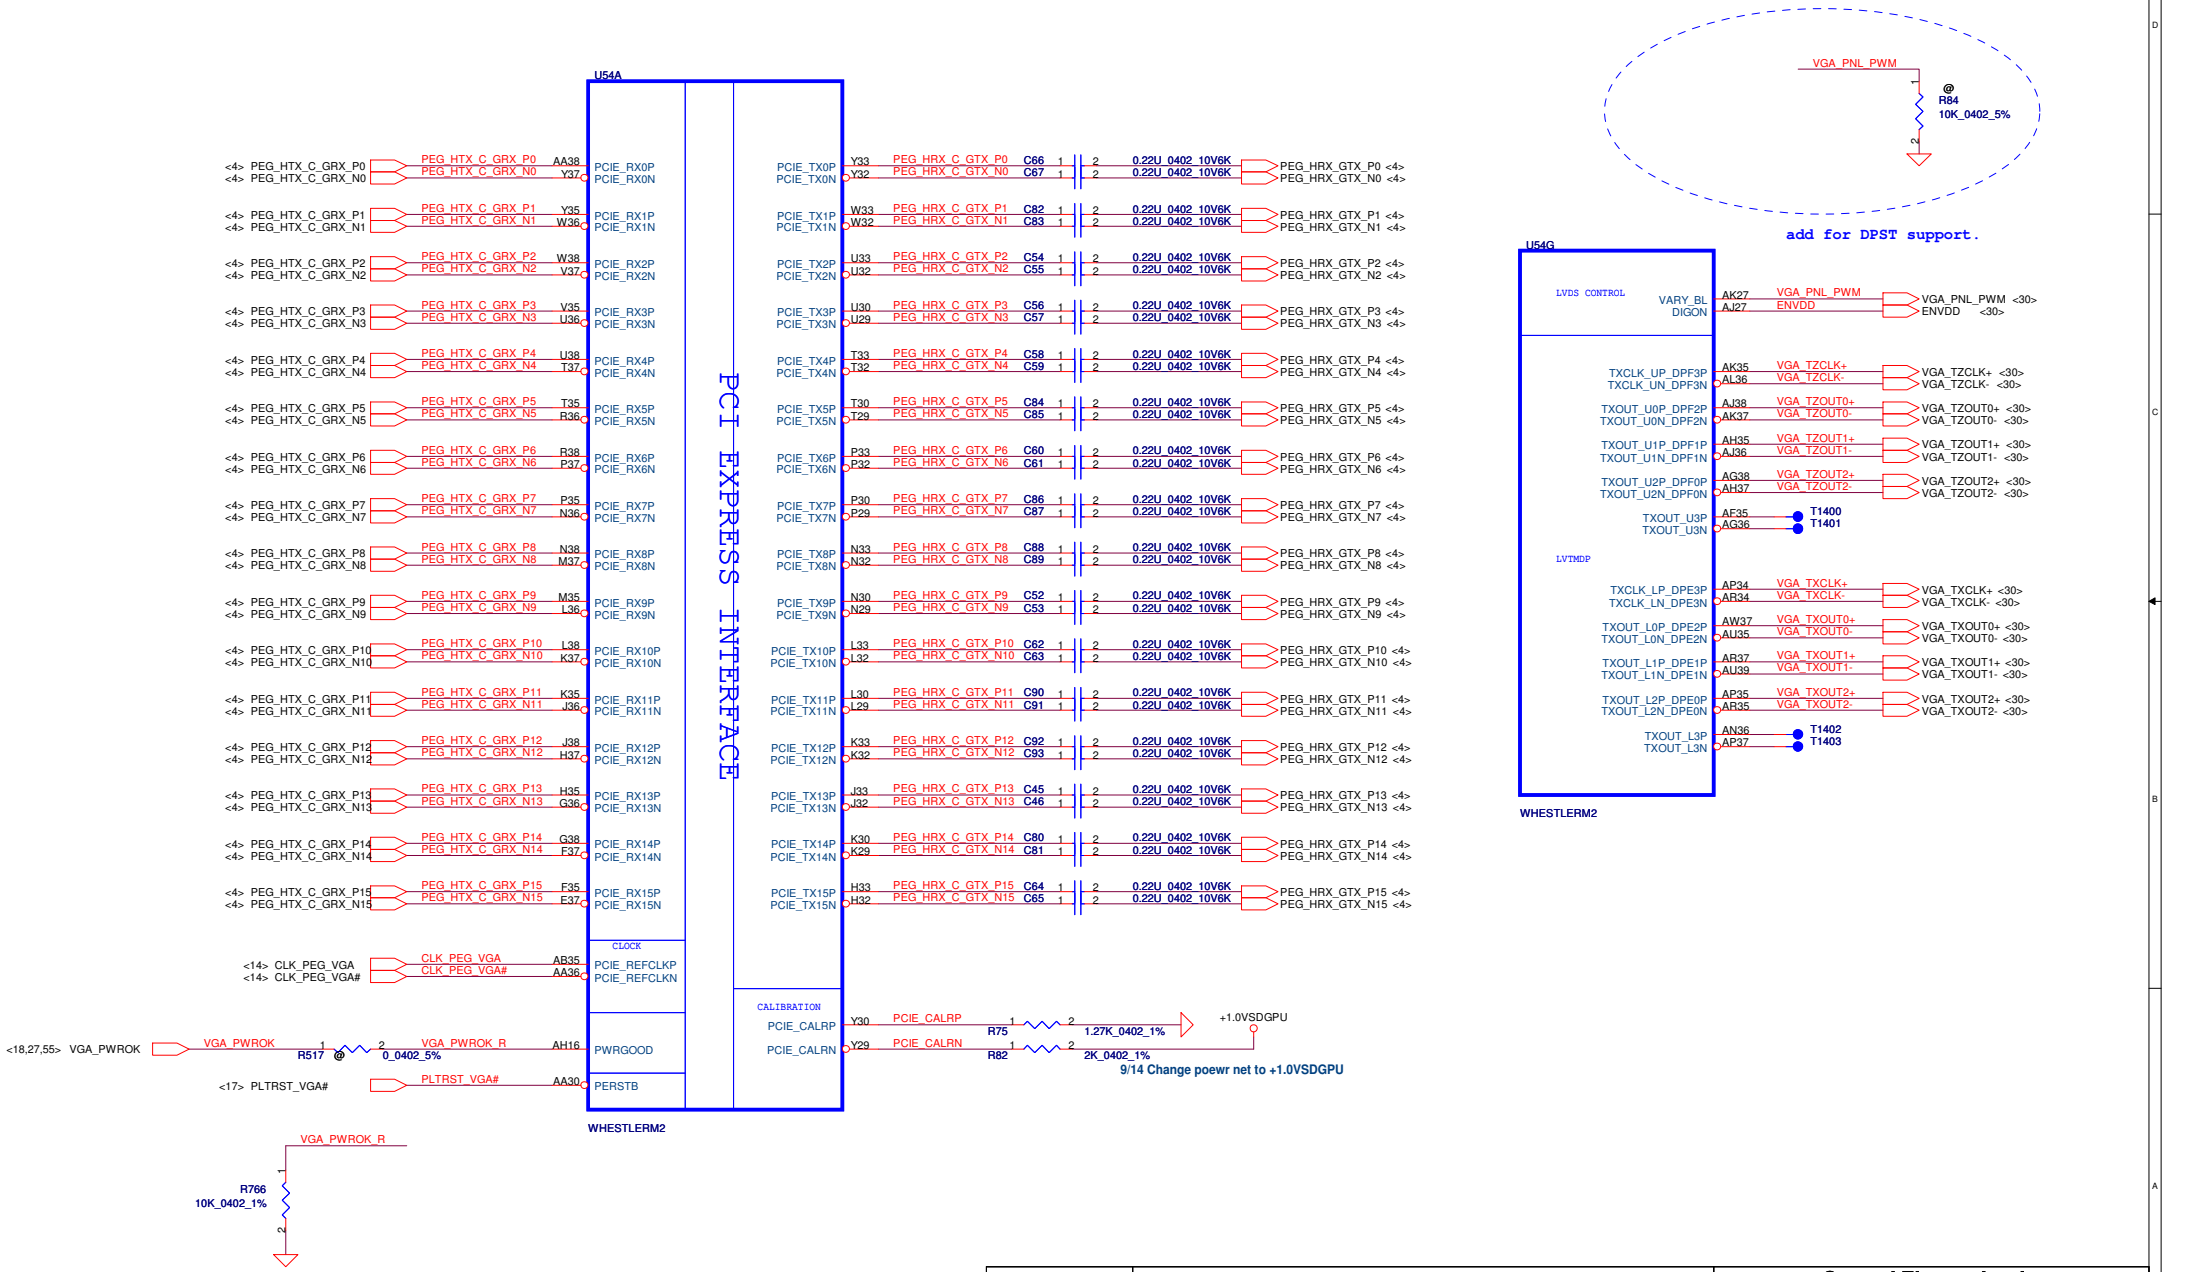

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: **Mannhatton_ PCIE / LVDS**

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 22 of 58

Strap Name		Pin Straps description	Default
TX_PWRS_ENB	GPIO0	Transmitter Power Saving Enable 0: 50% Tx output swing for mobile mode 1: full Tx output swing (Default setting for Desktop)	0
TX_DEEMPH_EN	GPIO1	PCI Express Transmitter De-emphasis Enable 0: Tx de-emphasis diabled for mobile mode 1: Tx de-emphasis enabled (Defailt setting for desktop)	0
BIF_GEN2_EN	GPIO2	0= Advertises the PCI-E device as 2.5 GT/s capable at power-on 1= Advertises the PCI-E device as 5.0 GT/s capable at power-on 5.0 GT/s capability will be controlled by software	0
CONFIG[1] CONFIG[2] CONFIG[0]	GPIO13 GPIO12 GPIO11	GPIO13,12,11 (config 2,1,0) : memory apertures a) If BIOS_ROM_EN = 1, then Config[2:0] defines the ROM type. CONFIG[3:0] 128 MB 000 256 MB 001 b) If BIOS_ROM_EN = 0, then Config[2:0] defines the primary memory aperture size. 64 MB 010	001
BIOS_ROM_EN	GPIO22	Enable external BIOS ROM device 0: Diable, 1: Enable	0
AUD[1] AUD(0)	HSYNC VSYNC	00: No audio function; 10: Audio for DisplayPort only; 01: Audio for DisplayPort and HDMI if adapter is detected; 11: Audio for both DisplayPort and HDMI	11
SMS_EN_HARD	H2SYNC	Can be unconnected if not used.	0
VIP_DEVICE _STRAP_DIS	V2SYNC	Can be unconnected if not used.	0

VRAM \ Location	VRAM_ID2	VRAM_ID1	VRAM_ID0	
Hynix(8pcs) 1GB (old) H5TQ1G63BFR-12C	O	O	1	
Hynix(8pcs) 1GB (900MHz) H5TQ1G63DFR-11C	O	1	O	
Samsung(8pcs) 1GB (900MHz) K4W1G1646G-BC11 LF	O	1	1	
Hynix(8pcs) 2GB (800MHz) H5TQ2G63BFR-12C	1	O	O	
Samsung(8pcs) 2GB (800MHz) K4W2G1646C-HC12	1	O	1	

External VGA Thermal Sensor

U15 @ ADM1032ARMZ-2REEL_MSOP8

+3VS_DELAY

@R833 0_0603_5%

AO3413_SOT23-3 Q10

100mA

Use boradway GPU, R28 change to 0 Ohm(SD028000080)

3/2 Change Bom structure of C120 to mount,Change value of R525 to 24k ohm(1%)

PWR Sequence

+3VS_DELAY

VGA_CORE (VDDC)

+1.8VS

M96 only

HDMI

CRT

Y3 must install on SG mode

WHESTLERM2

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: Mannhatton_Strape/DP/HDMI//CRT

Size	Document Number	Rev
C	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 23 of 58

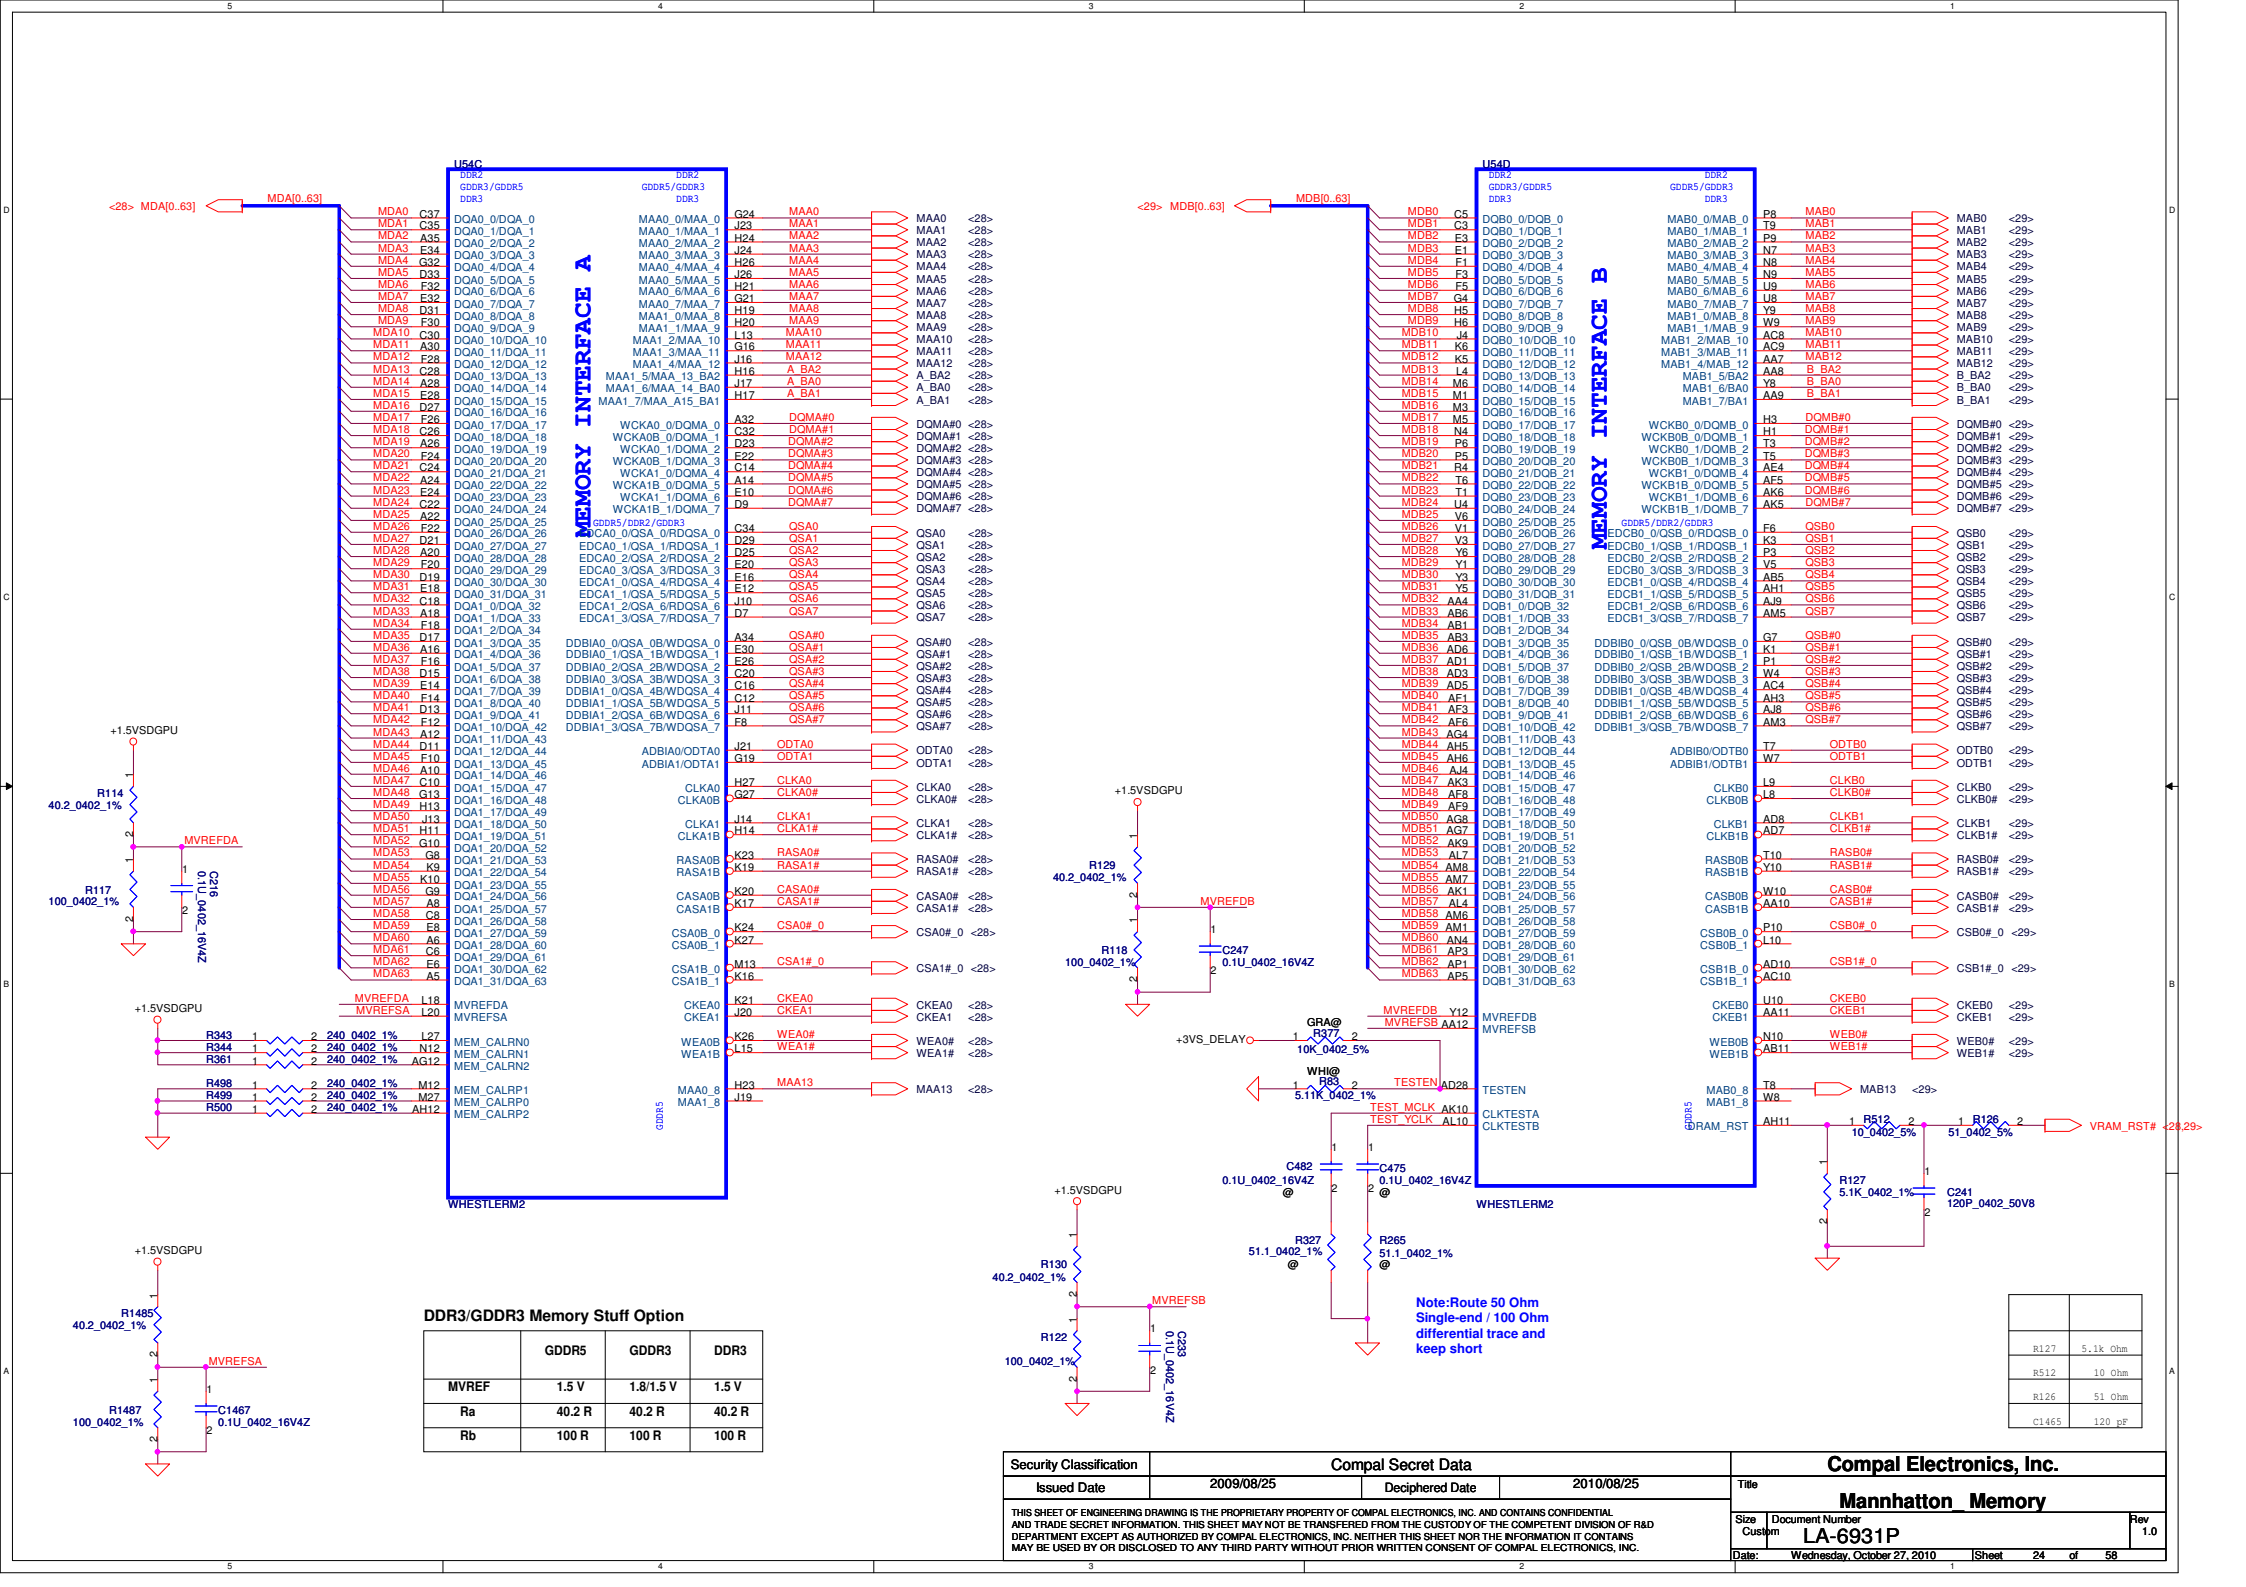

DDR3/GDDR3 Memory Stuff Option

	GDDR5	GDDR3	DDR3
MVREF	1.5 V	1.8/1.5 V	1.5 V
Ra	40.2 R	40.2 R	40.2 R
Rb	100 R	100 R	100 R

R127	5.1k Ohm
R512	10 Ohm
R126	51 Ohm
C1465	120 pF

Note:Route 50 Ohm Single-end / 100 Ohm differential trace and keep short

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: **Mannhatton_ Memory**

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 24 of 58

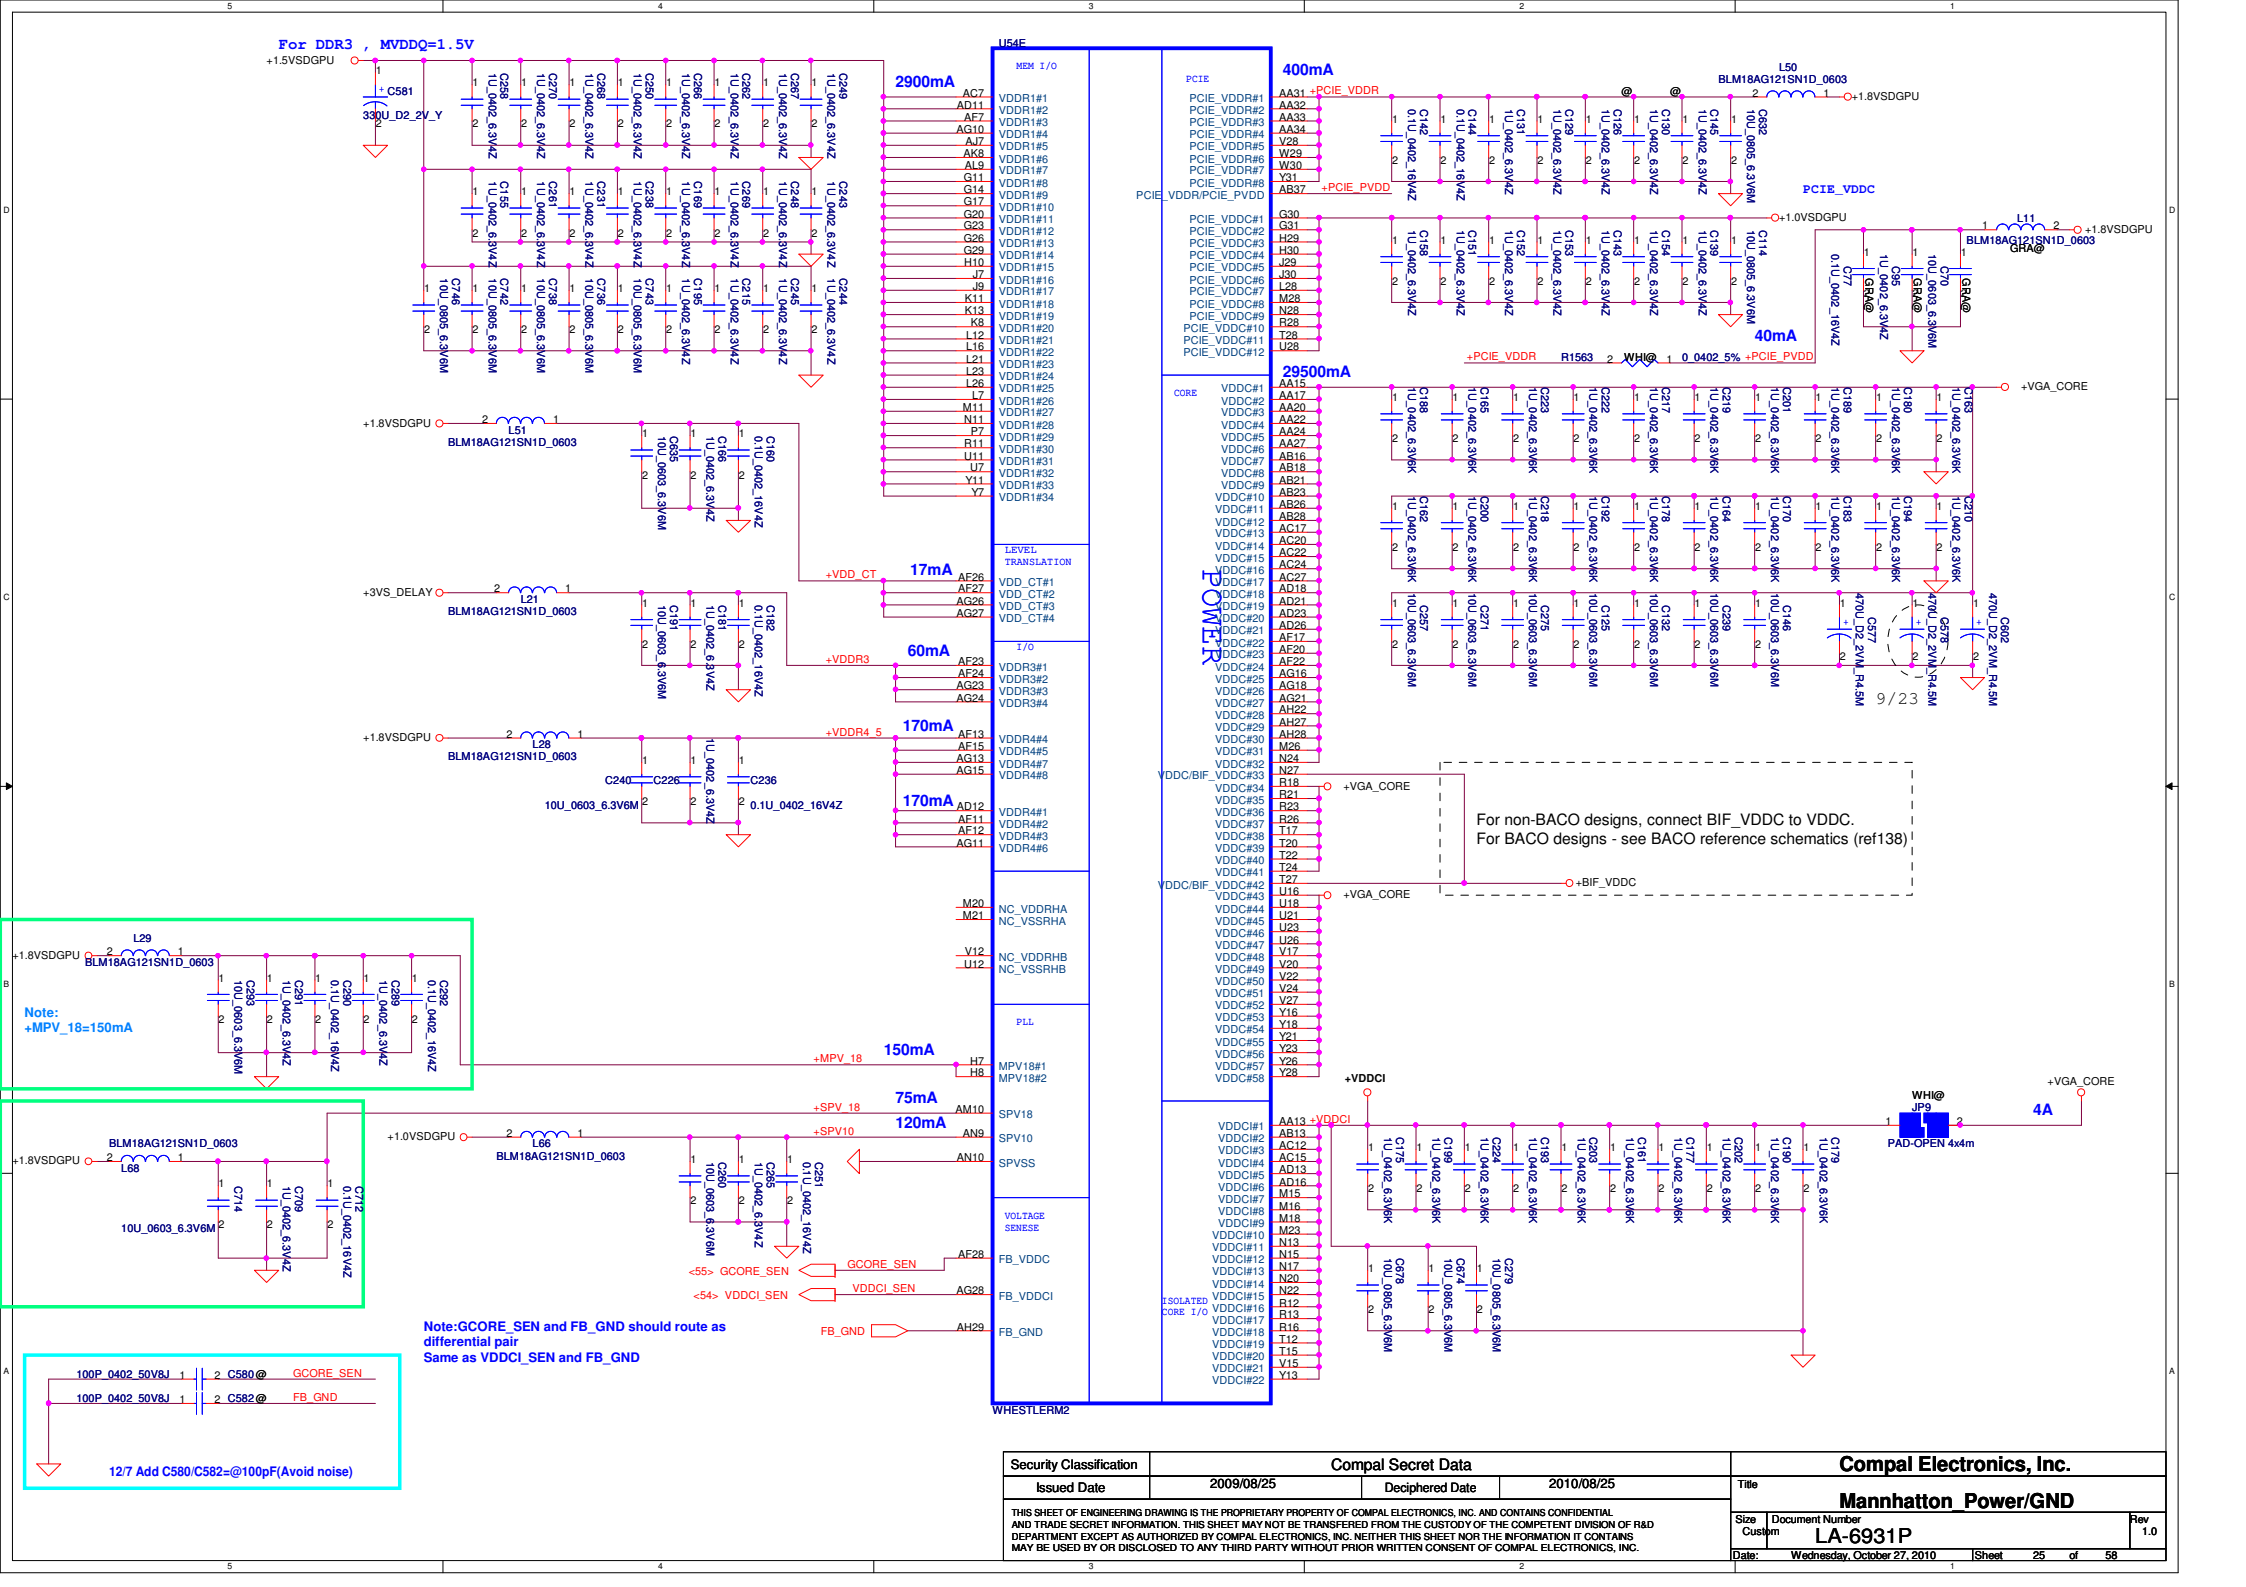

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: **Mannhatton_Power/GND**

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 | Sheet 25 of 58

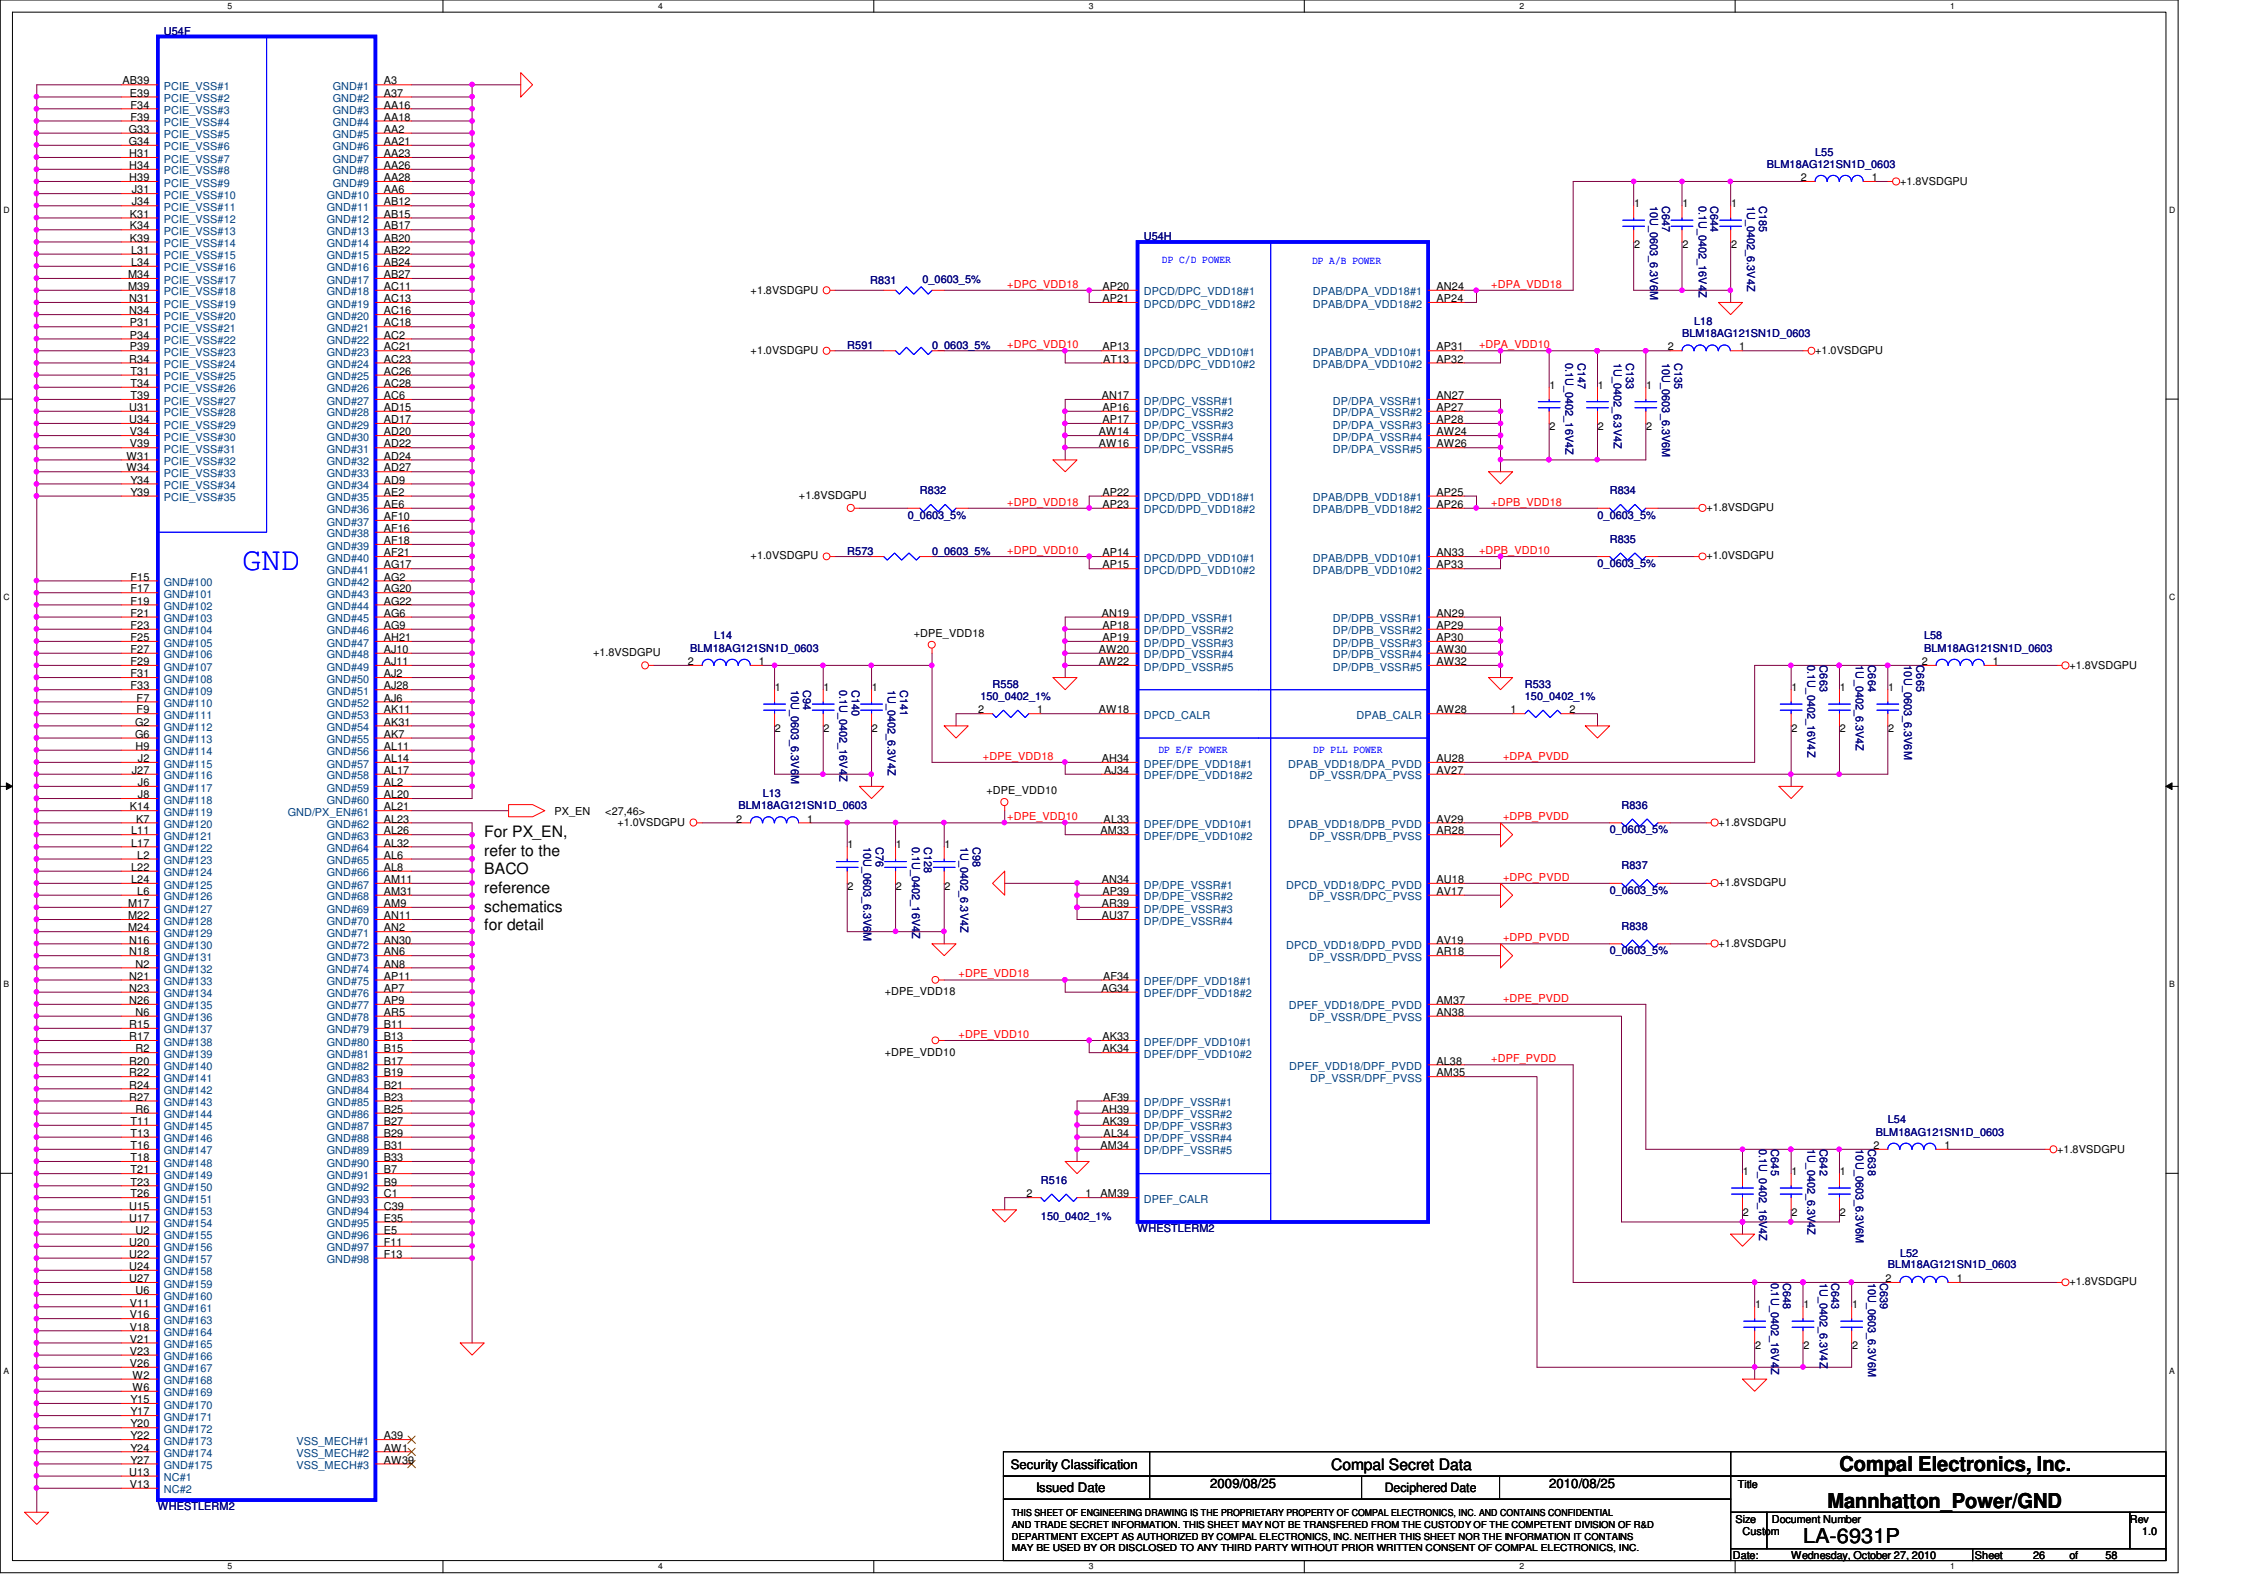

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: **Mannhatton_Power/GND**

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 | Sheet 26 of 58

PX_MODE =1, for Normal Operation
PX_MODE =0, for BACO MODE

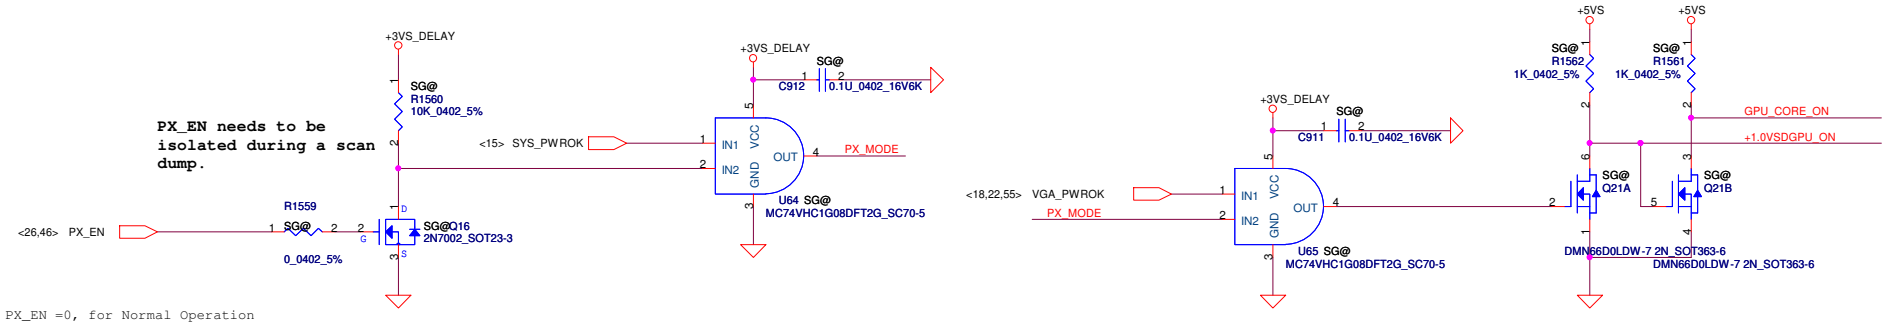

PX_EN =0, for Normal Operation
PX_EN =1, for BACO MODE

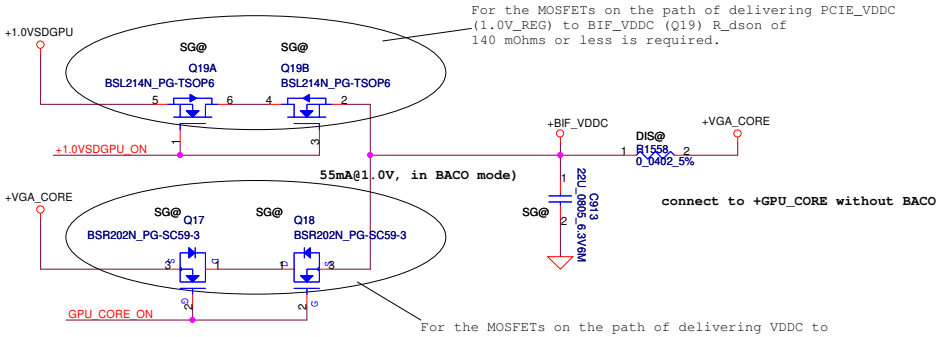

For the MOSFETs on the path of delivering PCIE_VDDC (1.0V_REG) to BIF_VDDC (Q19) R_dson of 140 mOhms or less is required.

For the MOSFETs on the path of delivering VDDC to BIF_VDDC (Q17 and Q18), R_dson of 21 mOhms or less is required.

	Voltage	In BACO mode
VDDR1	1.5V	OFF
VDDC/VDDCI	0.85~1.15V	OFF
others		ON



power on sequence:
(1) +3VS_Delay ----> +VDDC ----> +1.8VS
(> 0ms) (reach 90%)

(2) +3VS_Delay ----> +1.8VS ----> +VDDC
(> 0ms) (reach 90%)

Security Classification	Compal Secret Data		
Issued Date	2009/11/12	Deciphered Date	2010/11/12

Compal Electronics, Inc.

Title: BACO

Size: Custom | Document Number: LA-6931P | Rev: 1.0

Date: Wednesday, October 27, 2010 | Sheet 27 of 58

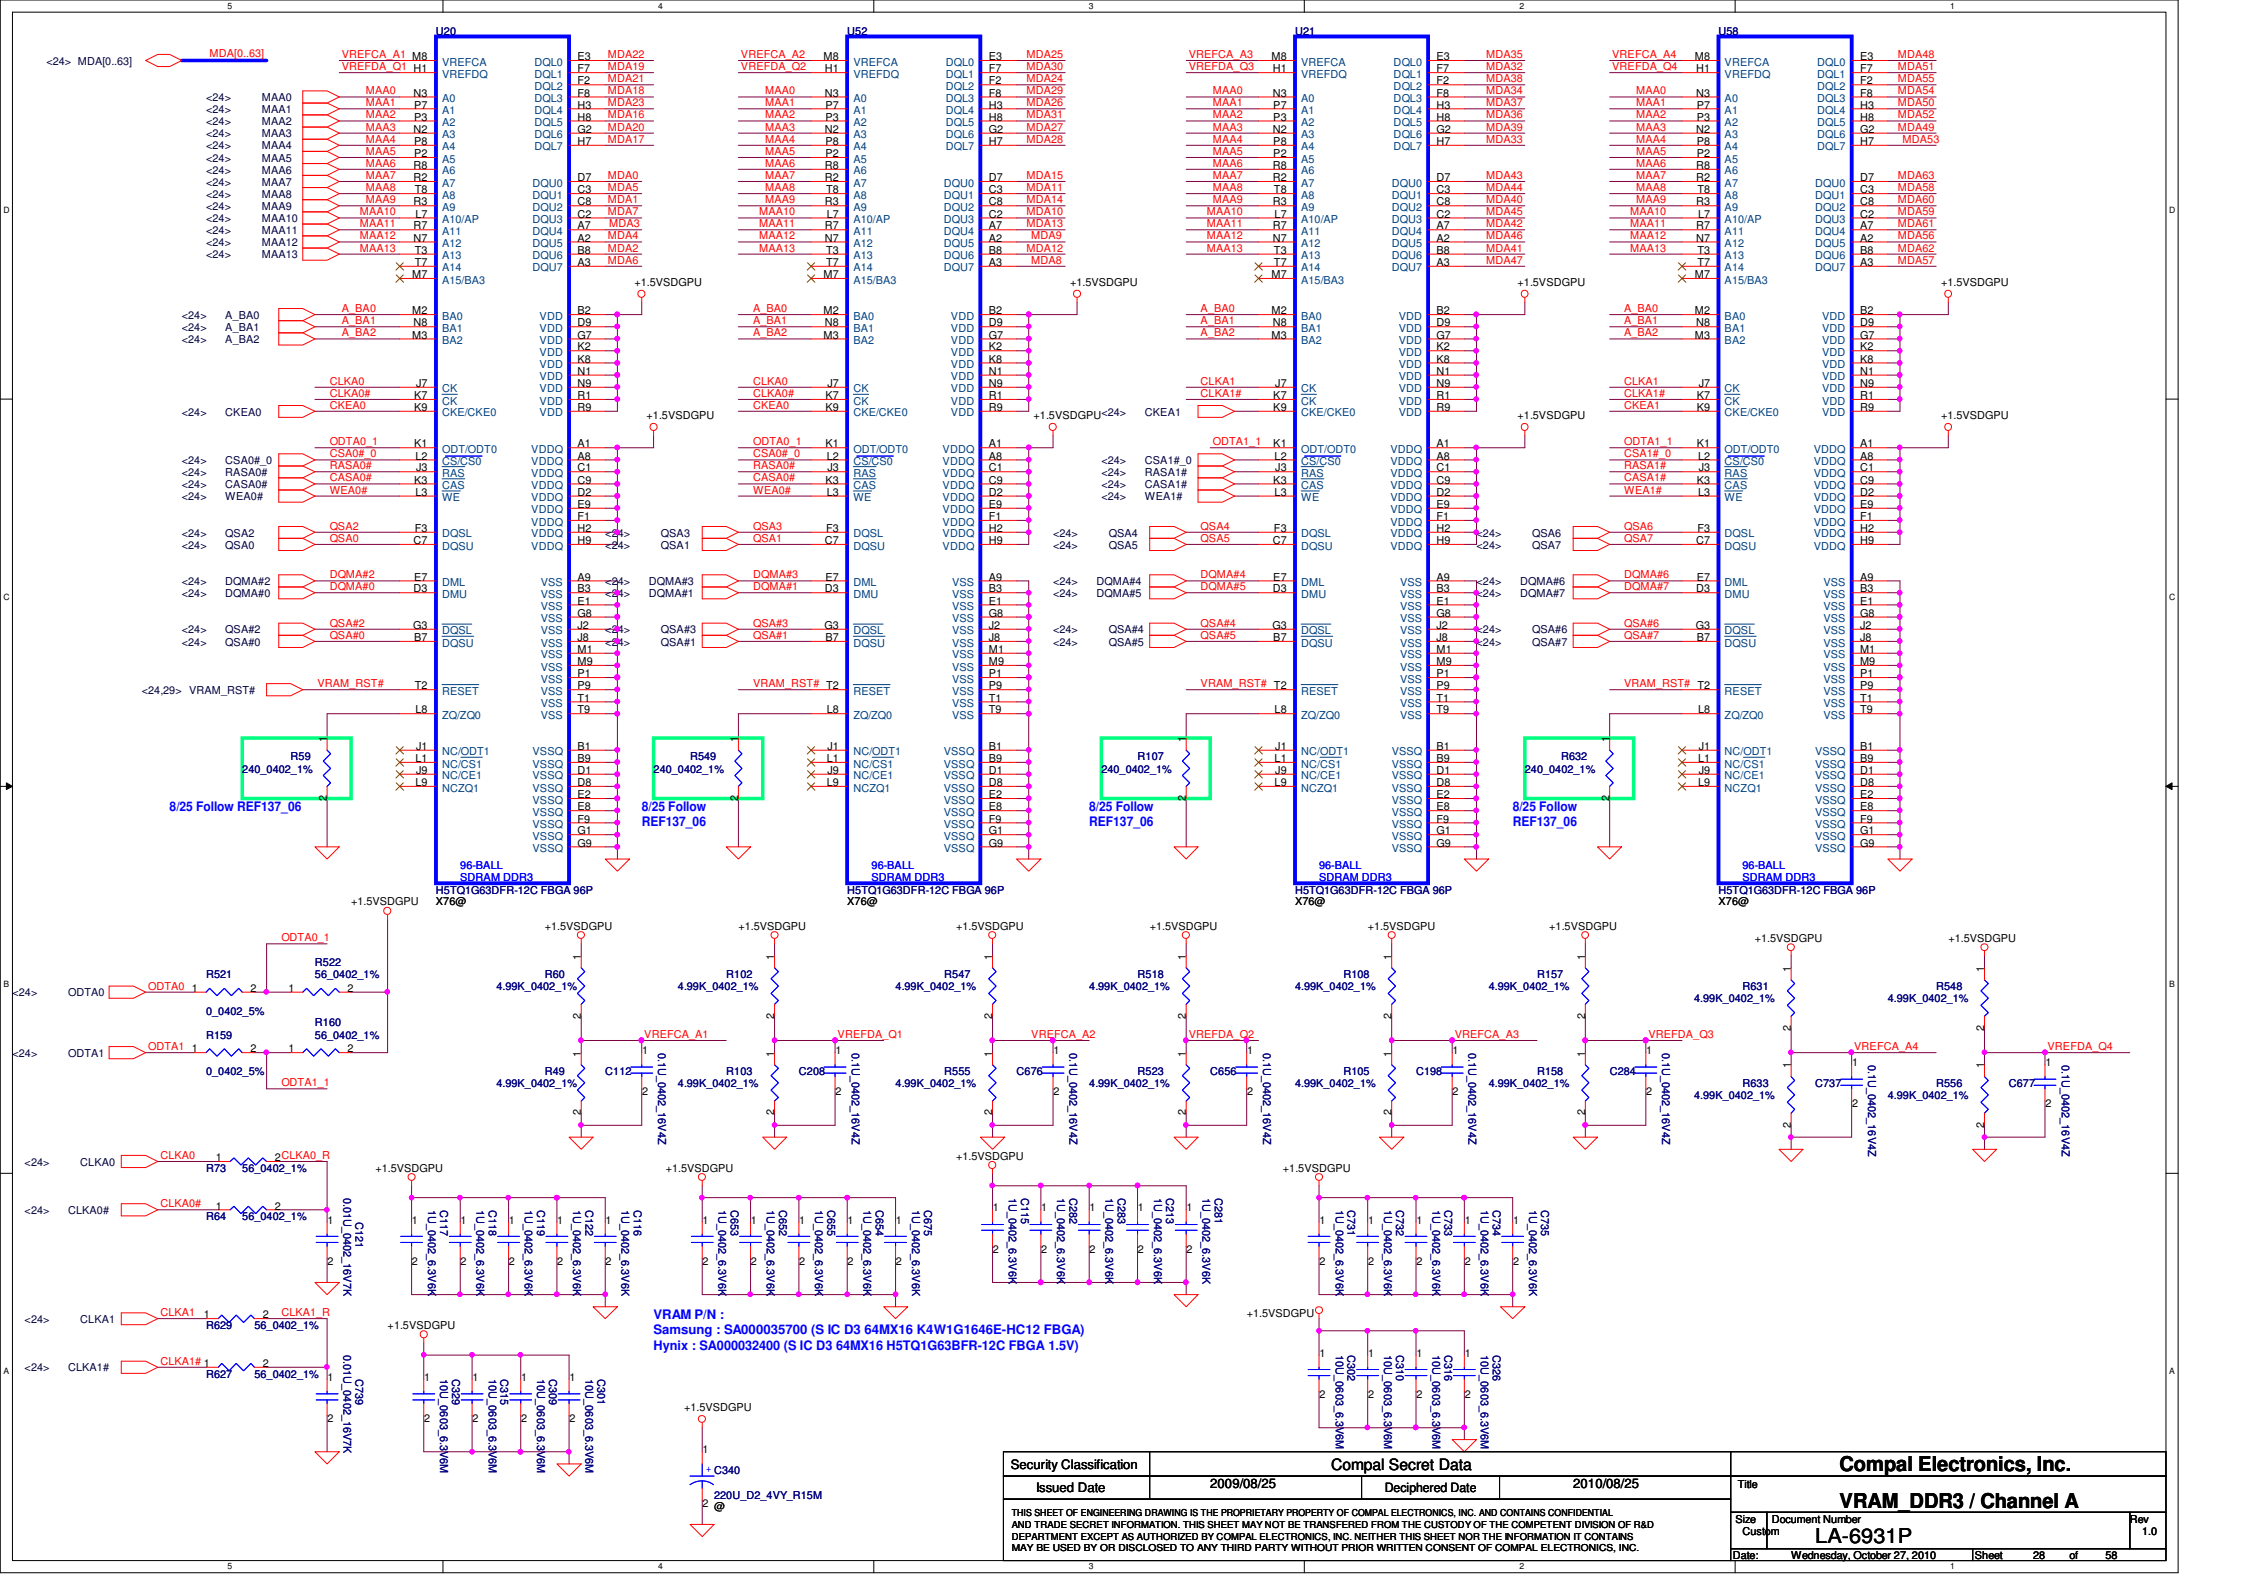

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: **VRAM_DDR3 / Channel A**

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 28 of 58

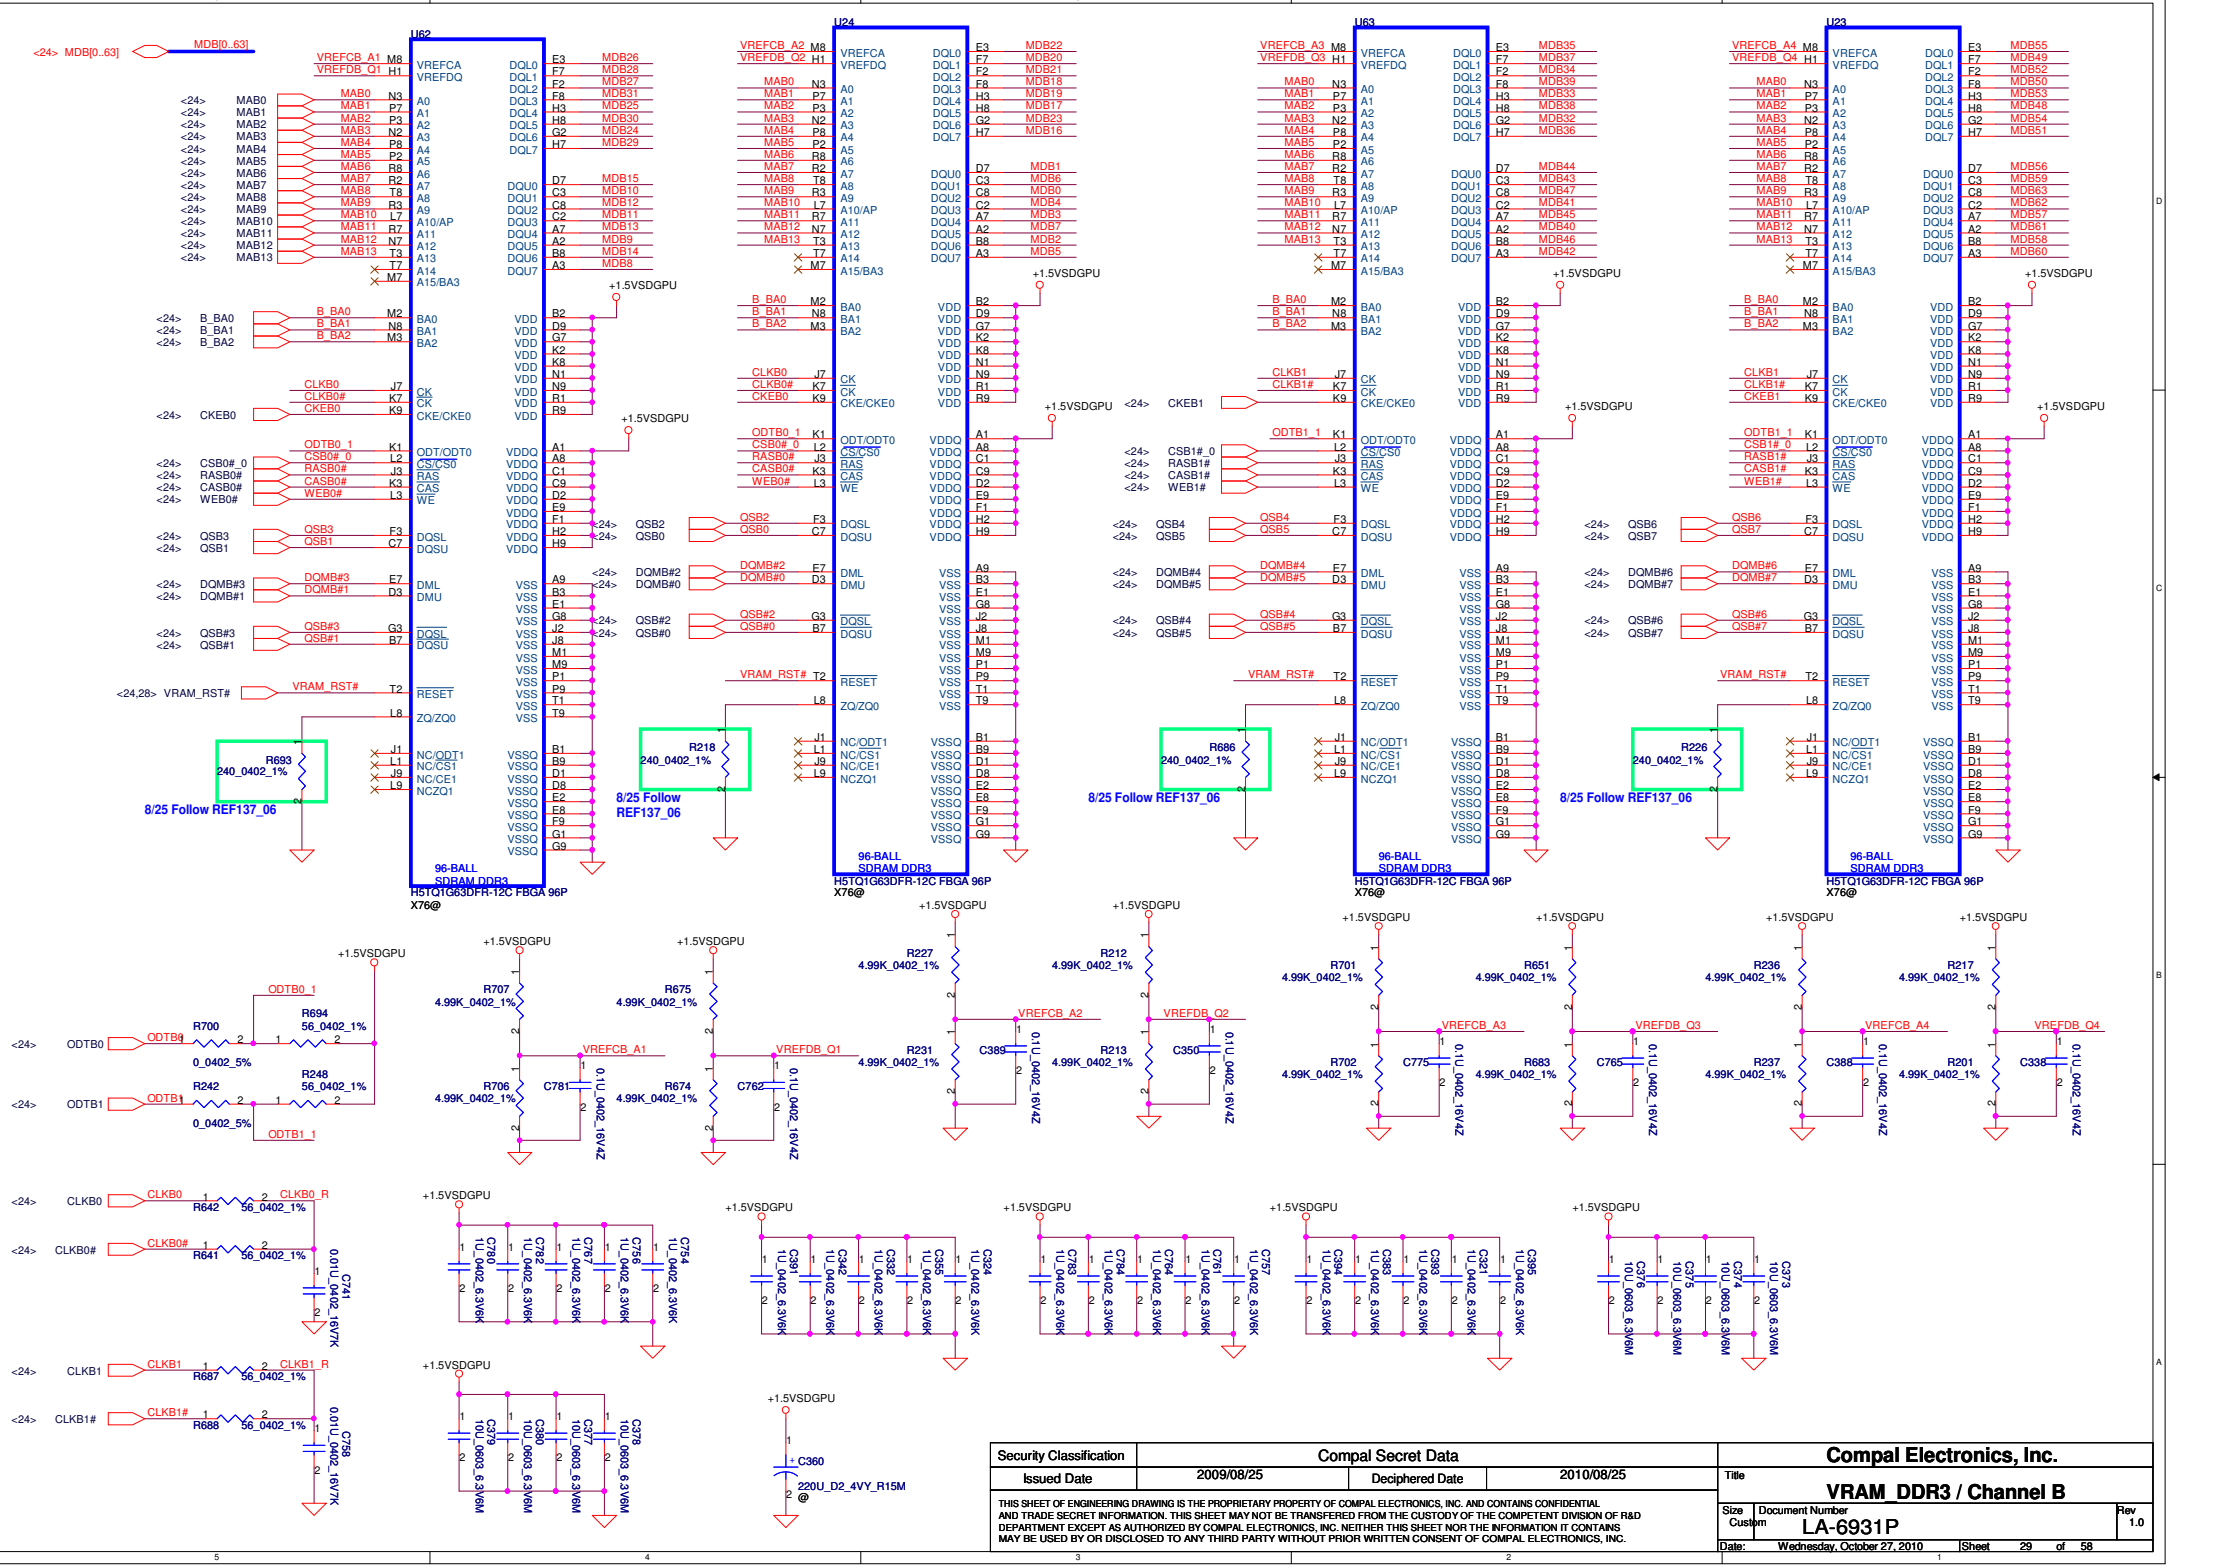

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: **VRAM_DDR3 / Channel B**

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 | Sheet 29 of 58

LCD POWER CIRCUIT

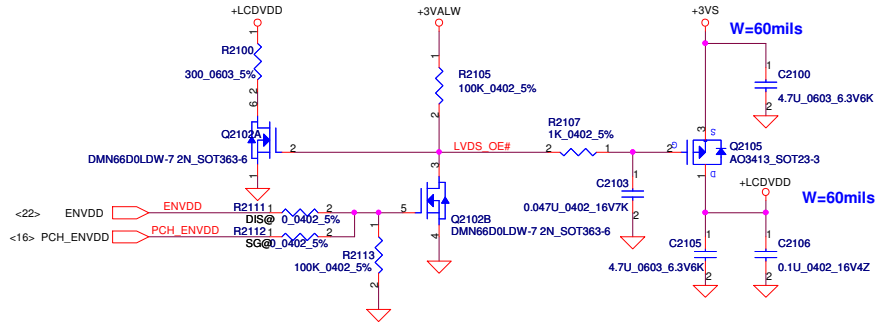

LED PANEL Conn.

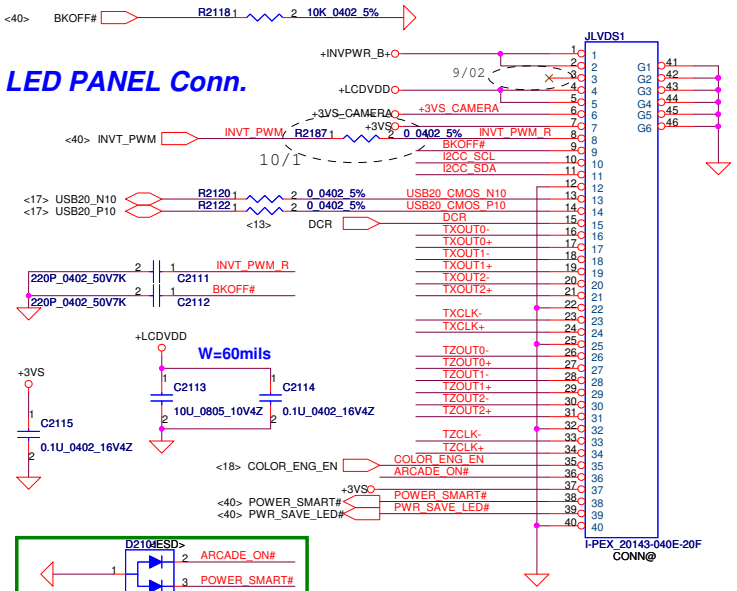





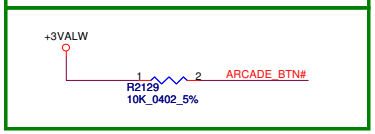



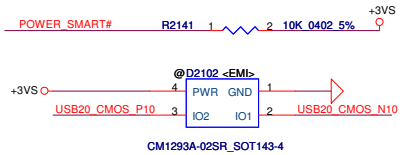

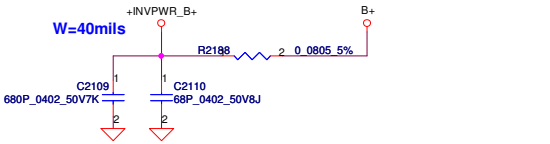





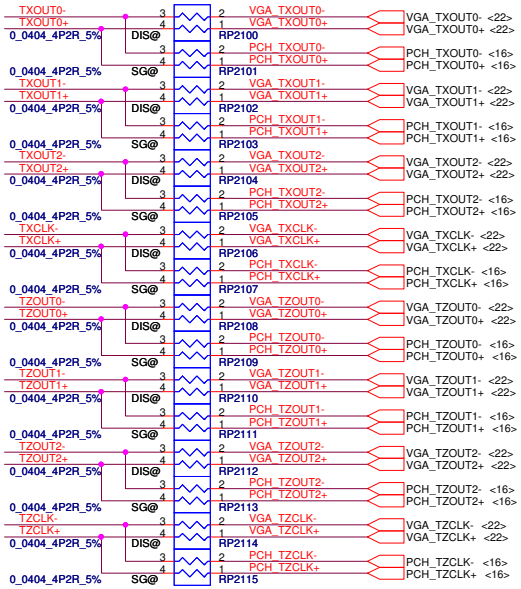

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: LVDS Connector

Size: Custom | Document Number: LA-6931P | Rev: 1.0

Date: Wednesday, October 27, 2010 | Sheet 30 of 58

CRT Connector

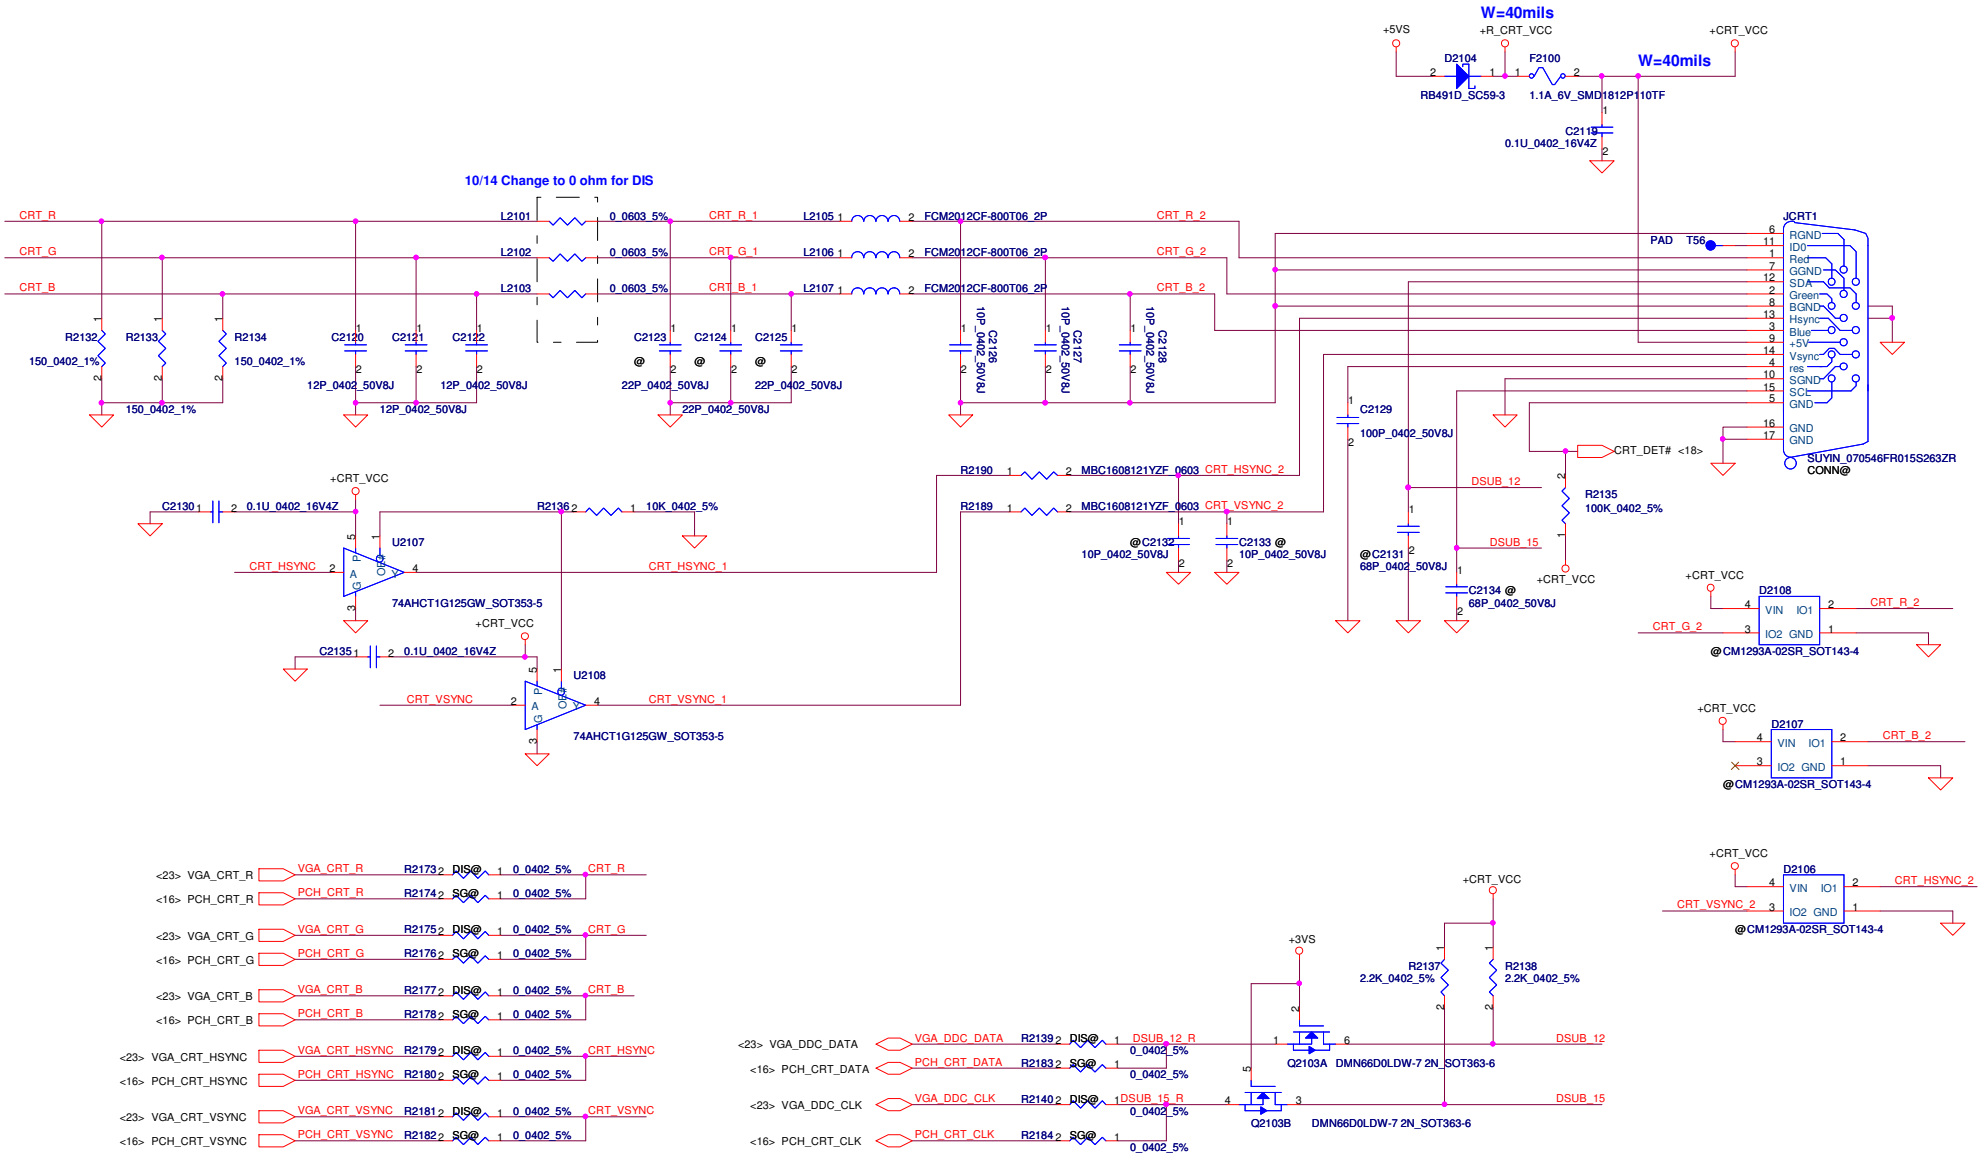

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2009/08/25

Compal Electronics, Inc.

Title: CRT Connector

Size	Document Number	Rev
B	LA-6931P	1.0

Date: Wednesday, October 27, 2010 | Sheet 31 of 58

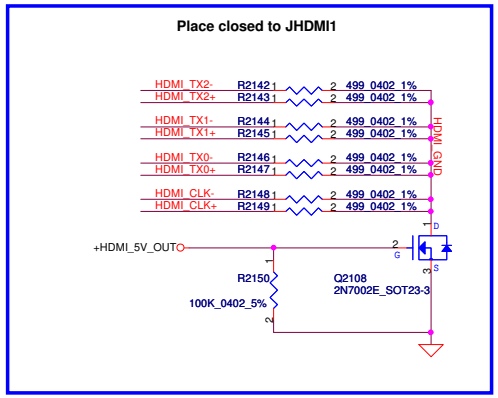

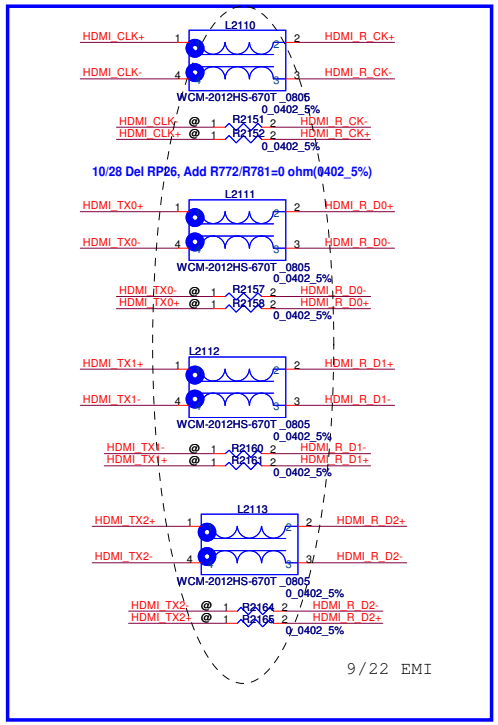

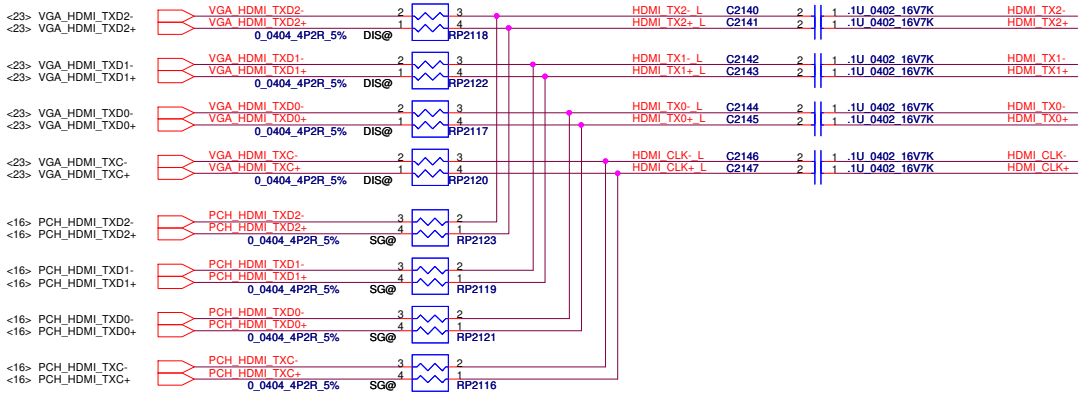

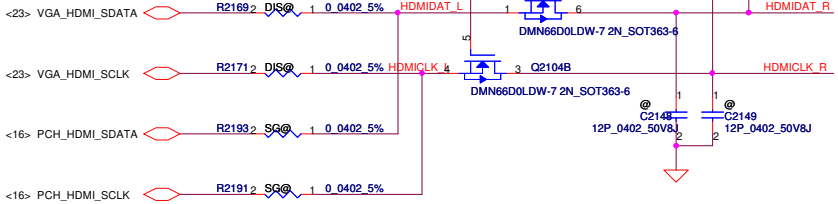

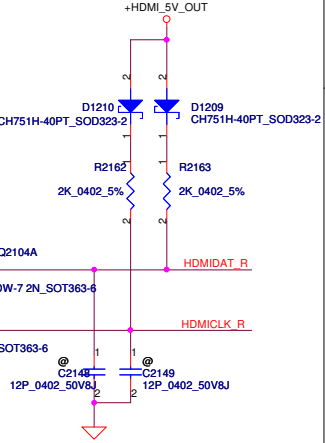

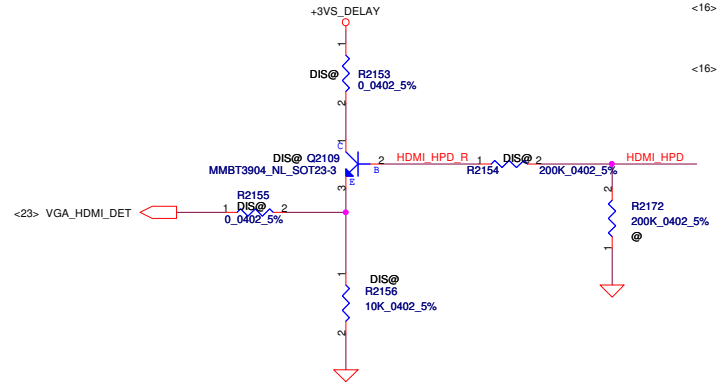

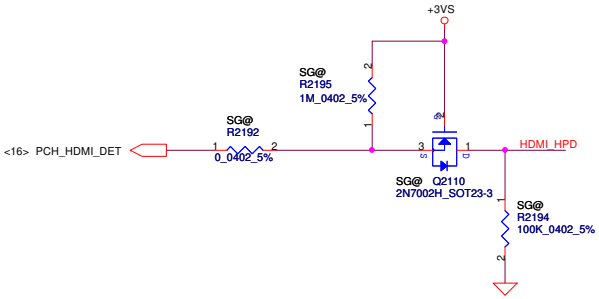



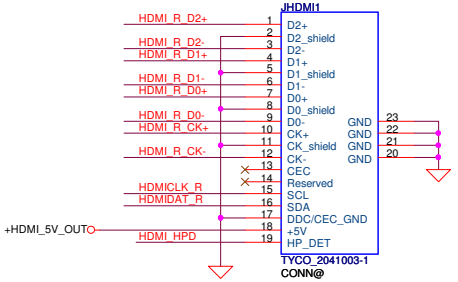

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: HDMI Level Shife & Conn

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 32 of 58

HDD

SATA HDD Conn.

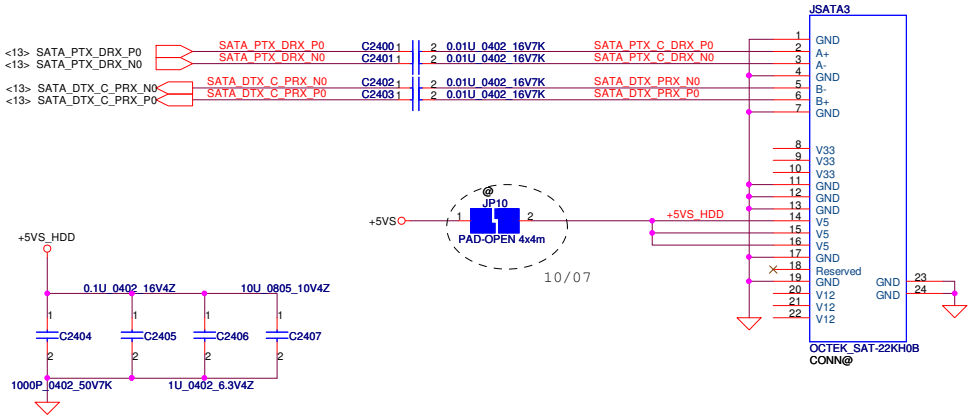

ODD

SATA ODD Conn.

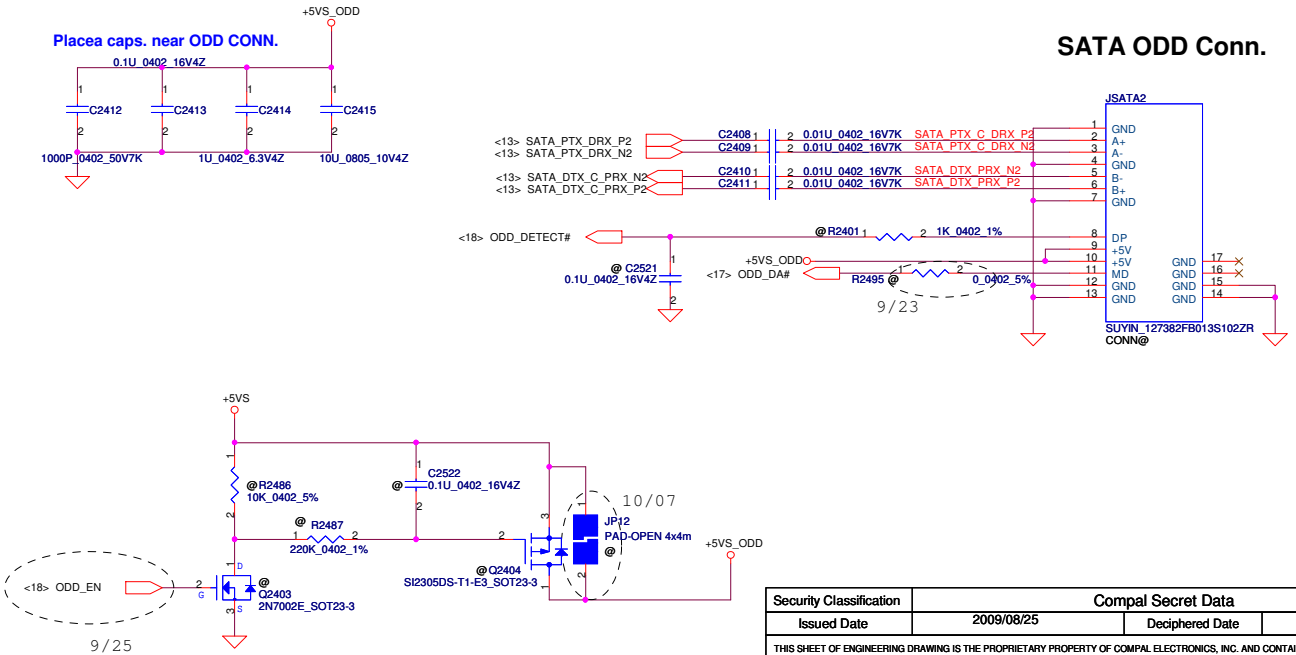

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: **HDD & ODD Connector**

Size	Document Number	Rev
B	LA-6931P	1.0

Date: Wednesday, October 27, 2010 | Sheet 33 of 58

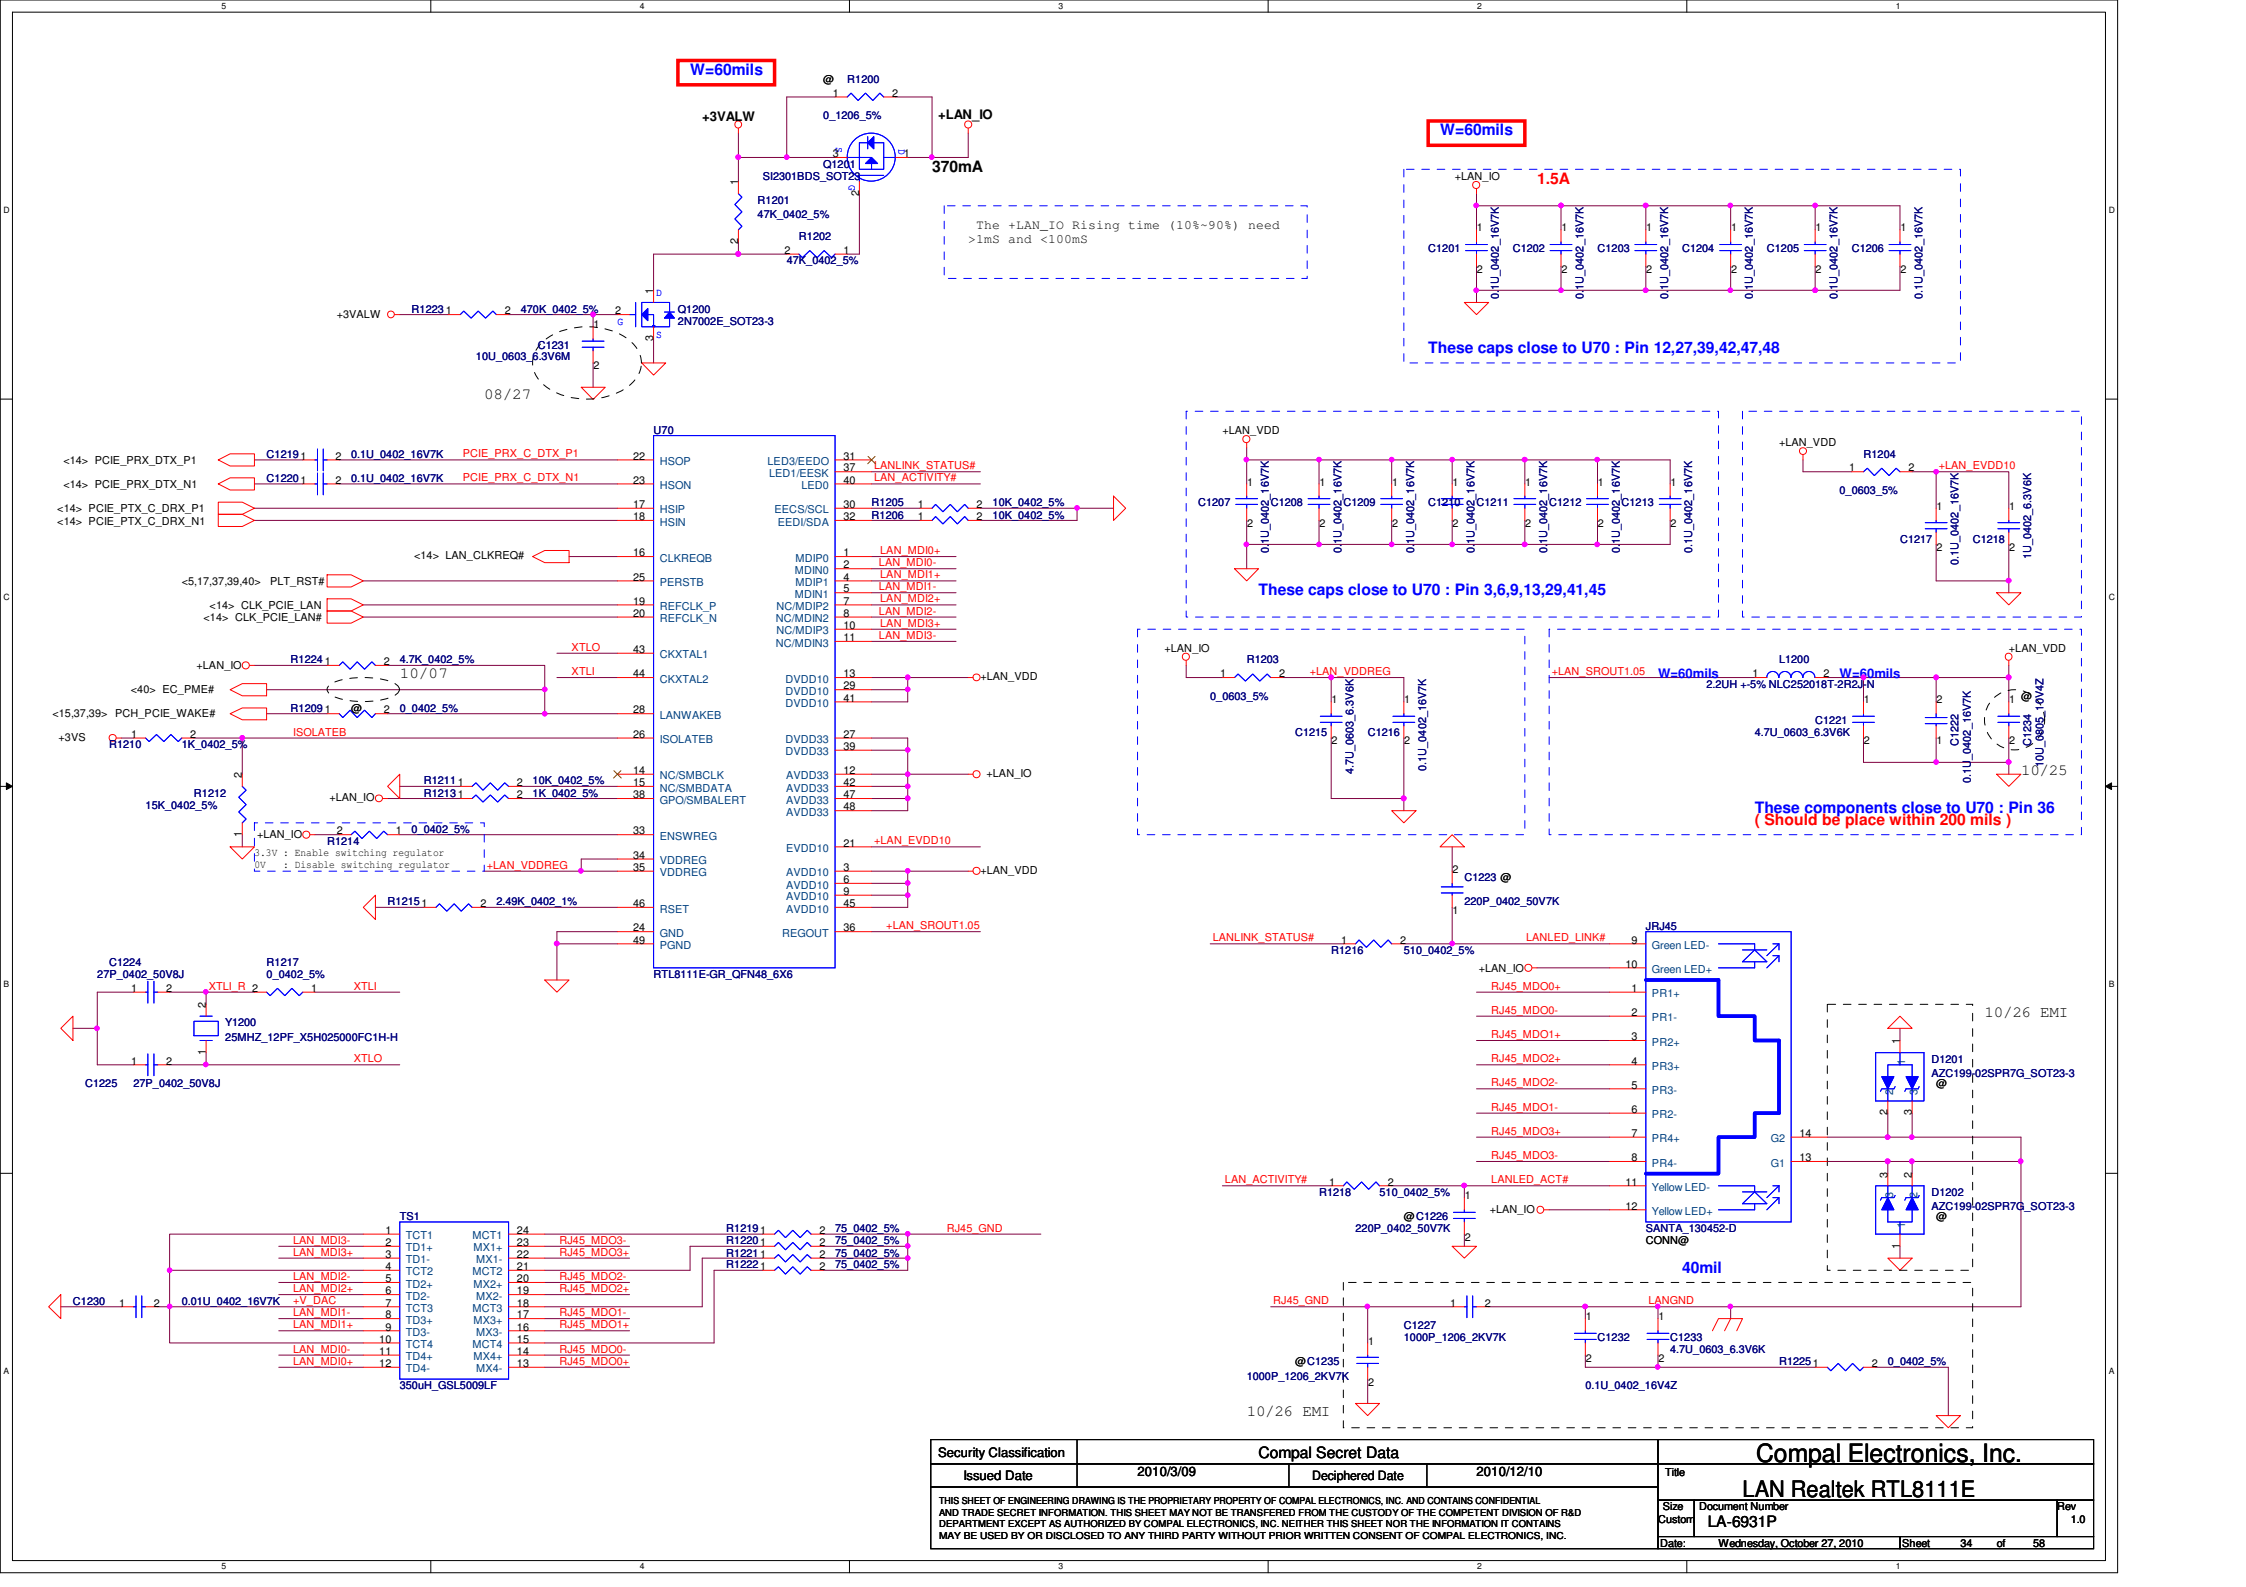

Security Classification	Compal Secret Data		
Issued Date	2010/3/09	Deciphered Date	2010/12/10

Compal Electronics, Inc.

Title: LAN Realtek RTL8111E

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 34 of 58

Lid Switch

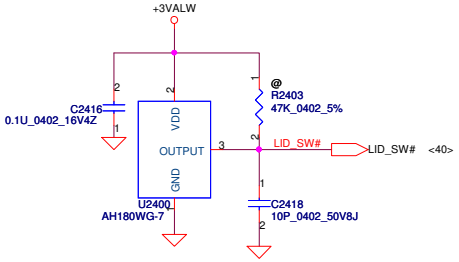

Touch Pad

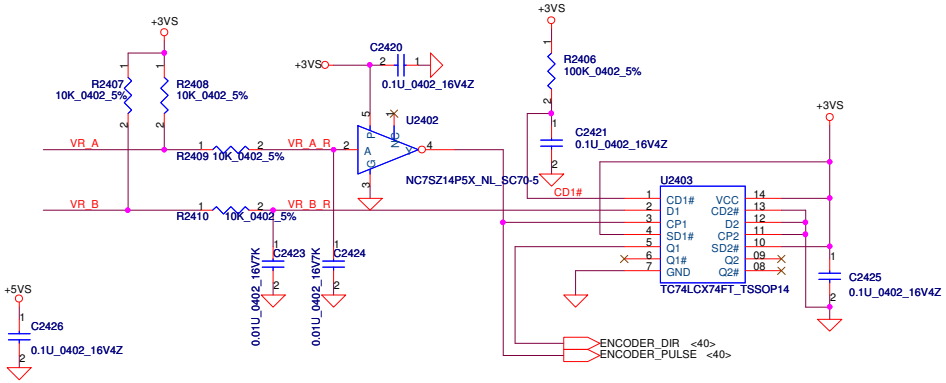

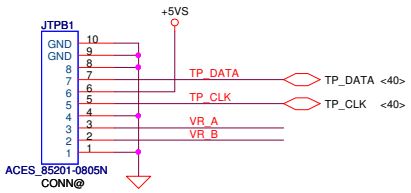



CIR

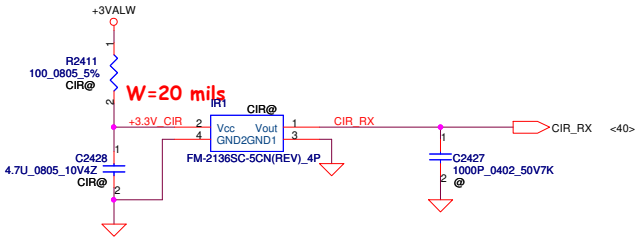

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.			
Title: LID/RTC/CIR			
Size	Document Number: LA-6931P		Rev: 1.0
Date: Wednesday, October 27, 2010	Sheet 35 of 58		

eSATA combine USB Conn

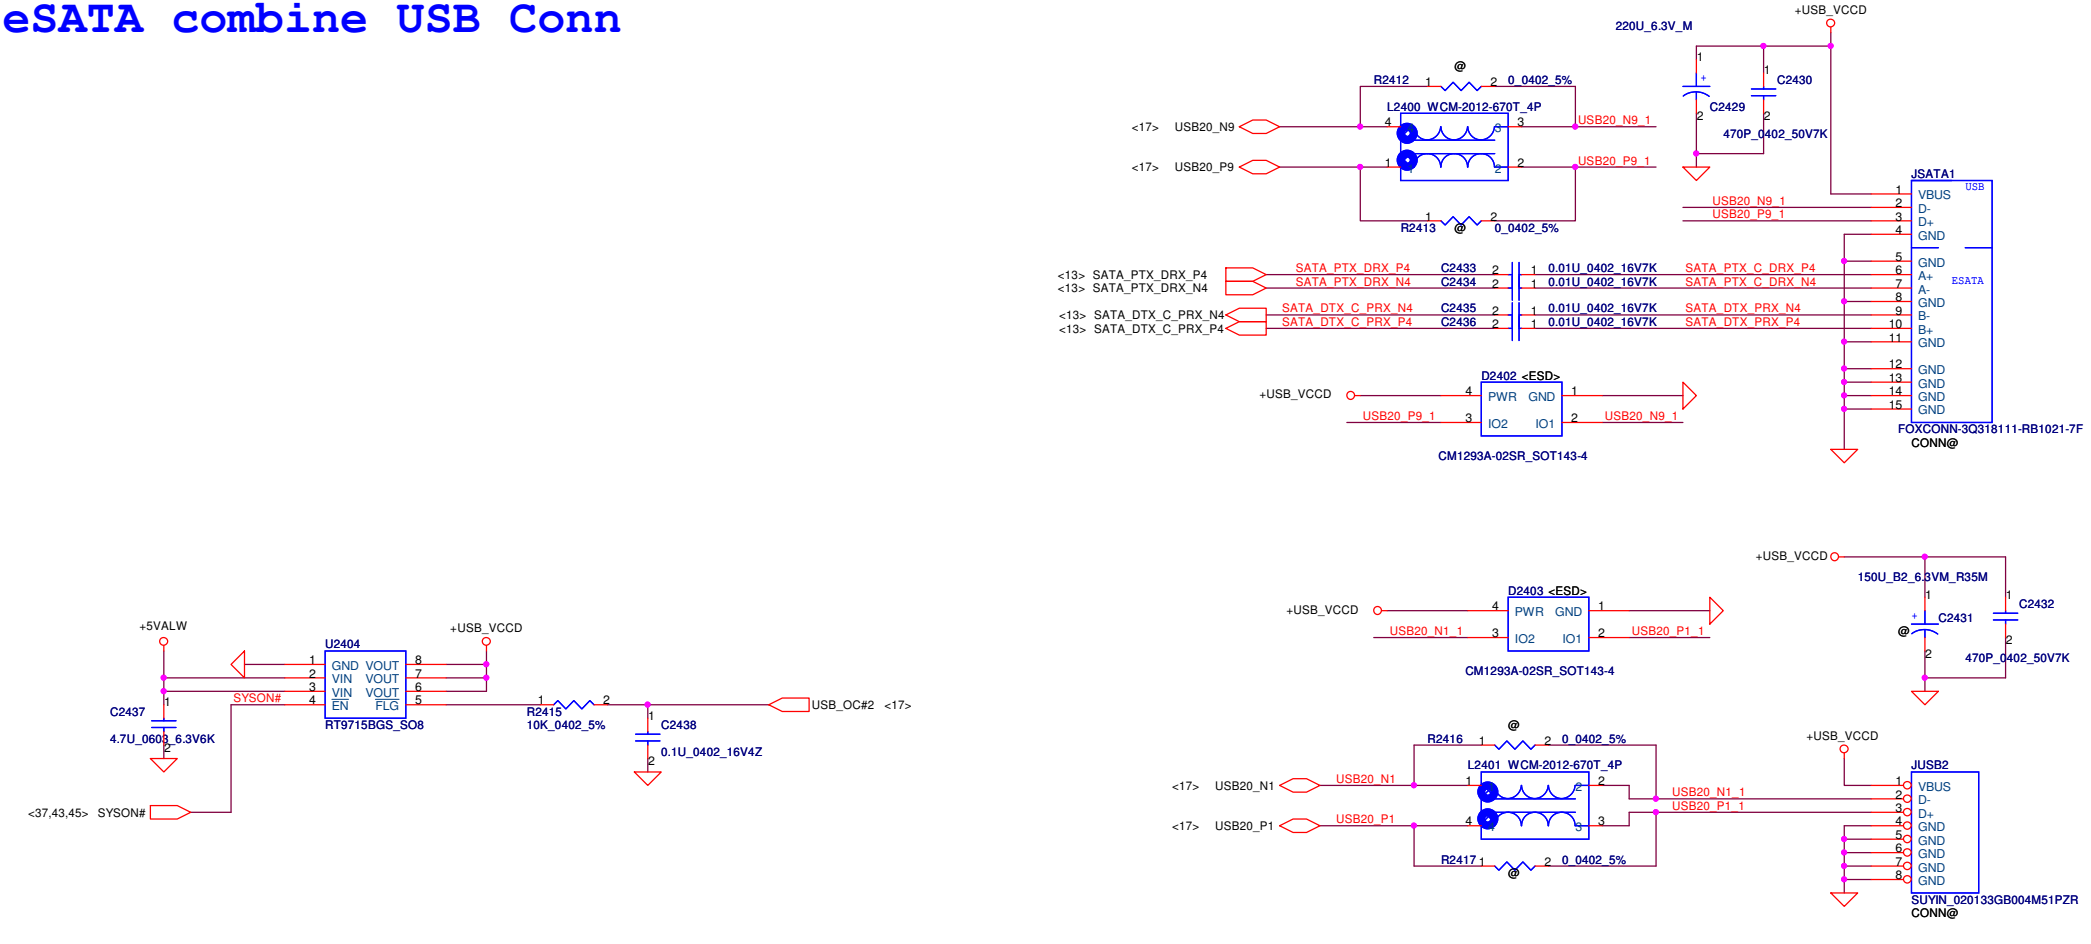

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: USB / eSATA

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 36 of 58

+1.5V to +1.05V Transfer

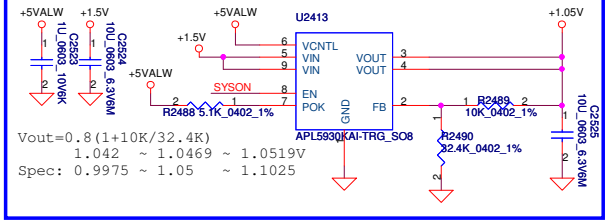

+3VALW to +3V Transfer

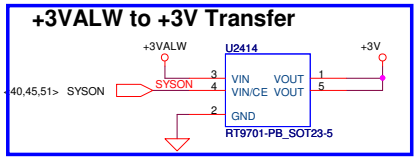

Close to U2407.D7



Close to U2407.P13



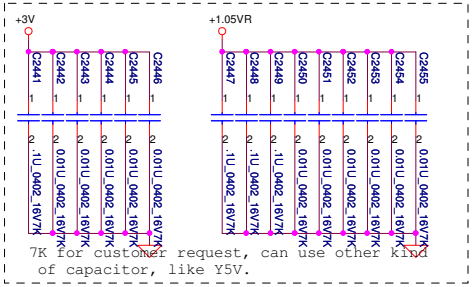

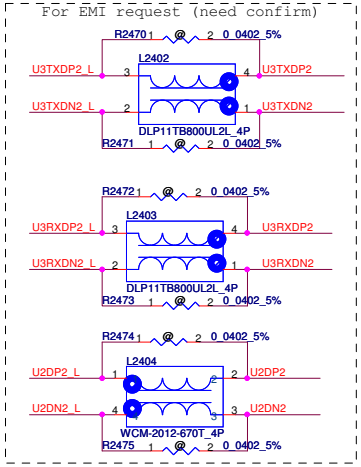



D-case for customer request
can use B-case, either.

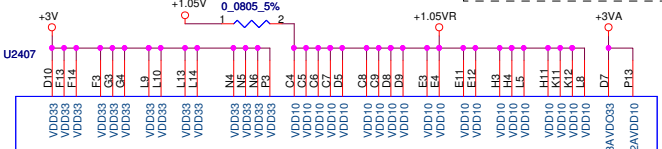

SPEC Max:+3V---200mA;+1.05V---800mA
Idle mode:0.489W:
+3V---43mA;+1.05V---328mA
D3 mode:0.066W:
+3V---5.4mA;+1.05V---45mA





PCI Express/ExpressCard select signal
1:others
0:Express Card or Mini card

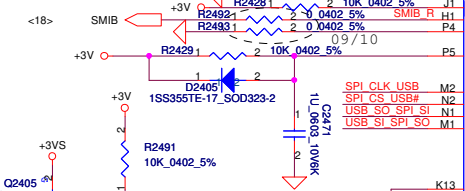

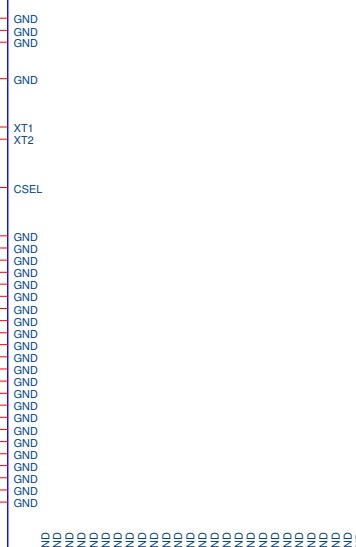

As short as possible

Place as close as possible to U3.N14 and U3.M14

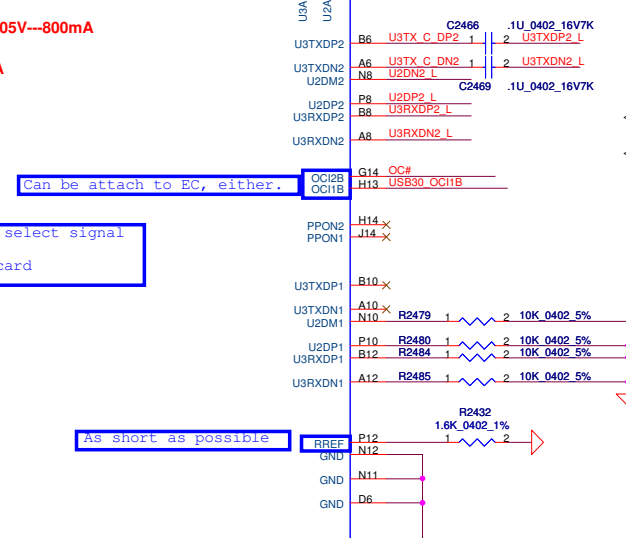







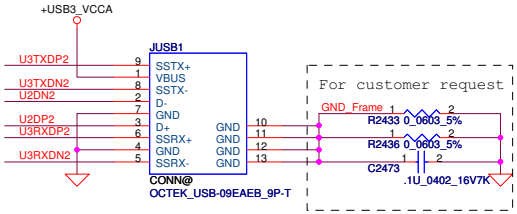



Pin compare table for support USB remote wakeup or not

	AUXDET(Pin J2)	CSEL(Pin P6)	CLK
Support USB remote wakeup	pull high 10k to VDD33	Tied to GND	Must use 24MHz crystal: mount Y2400,2440,C2474,C2475
Not support USB remote wakeup	Tied to GND	pull high to VDD33	Can use either 48MHz or 24MHz When use 48MHz clock: mount R2476,R2483

UPD720200AF1-DAP-A

Can be attach to EC, either.

Title: USB3.0 PD720200
Size: Custom | Document Number | Rev: 1.0
Date: Wednesday, October 27, 2010 | Sheet 37 of 58

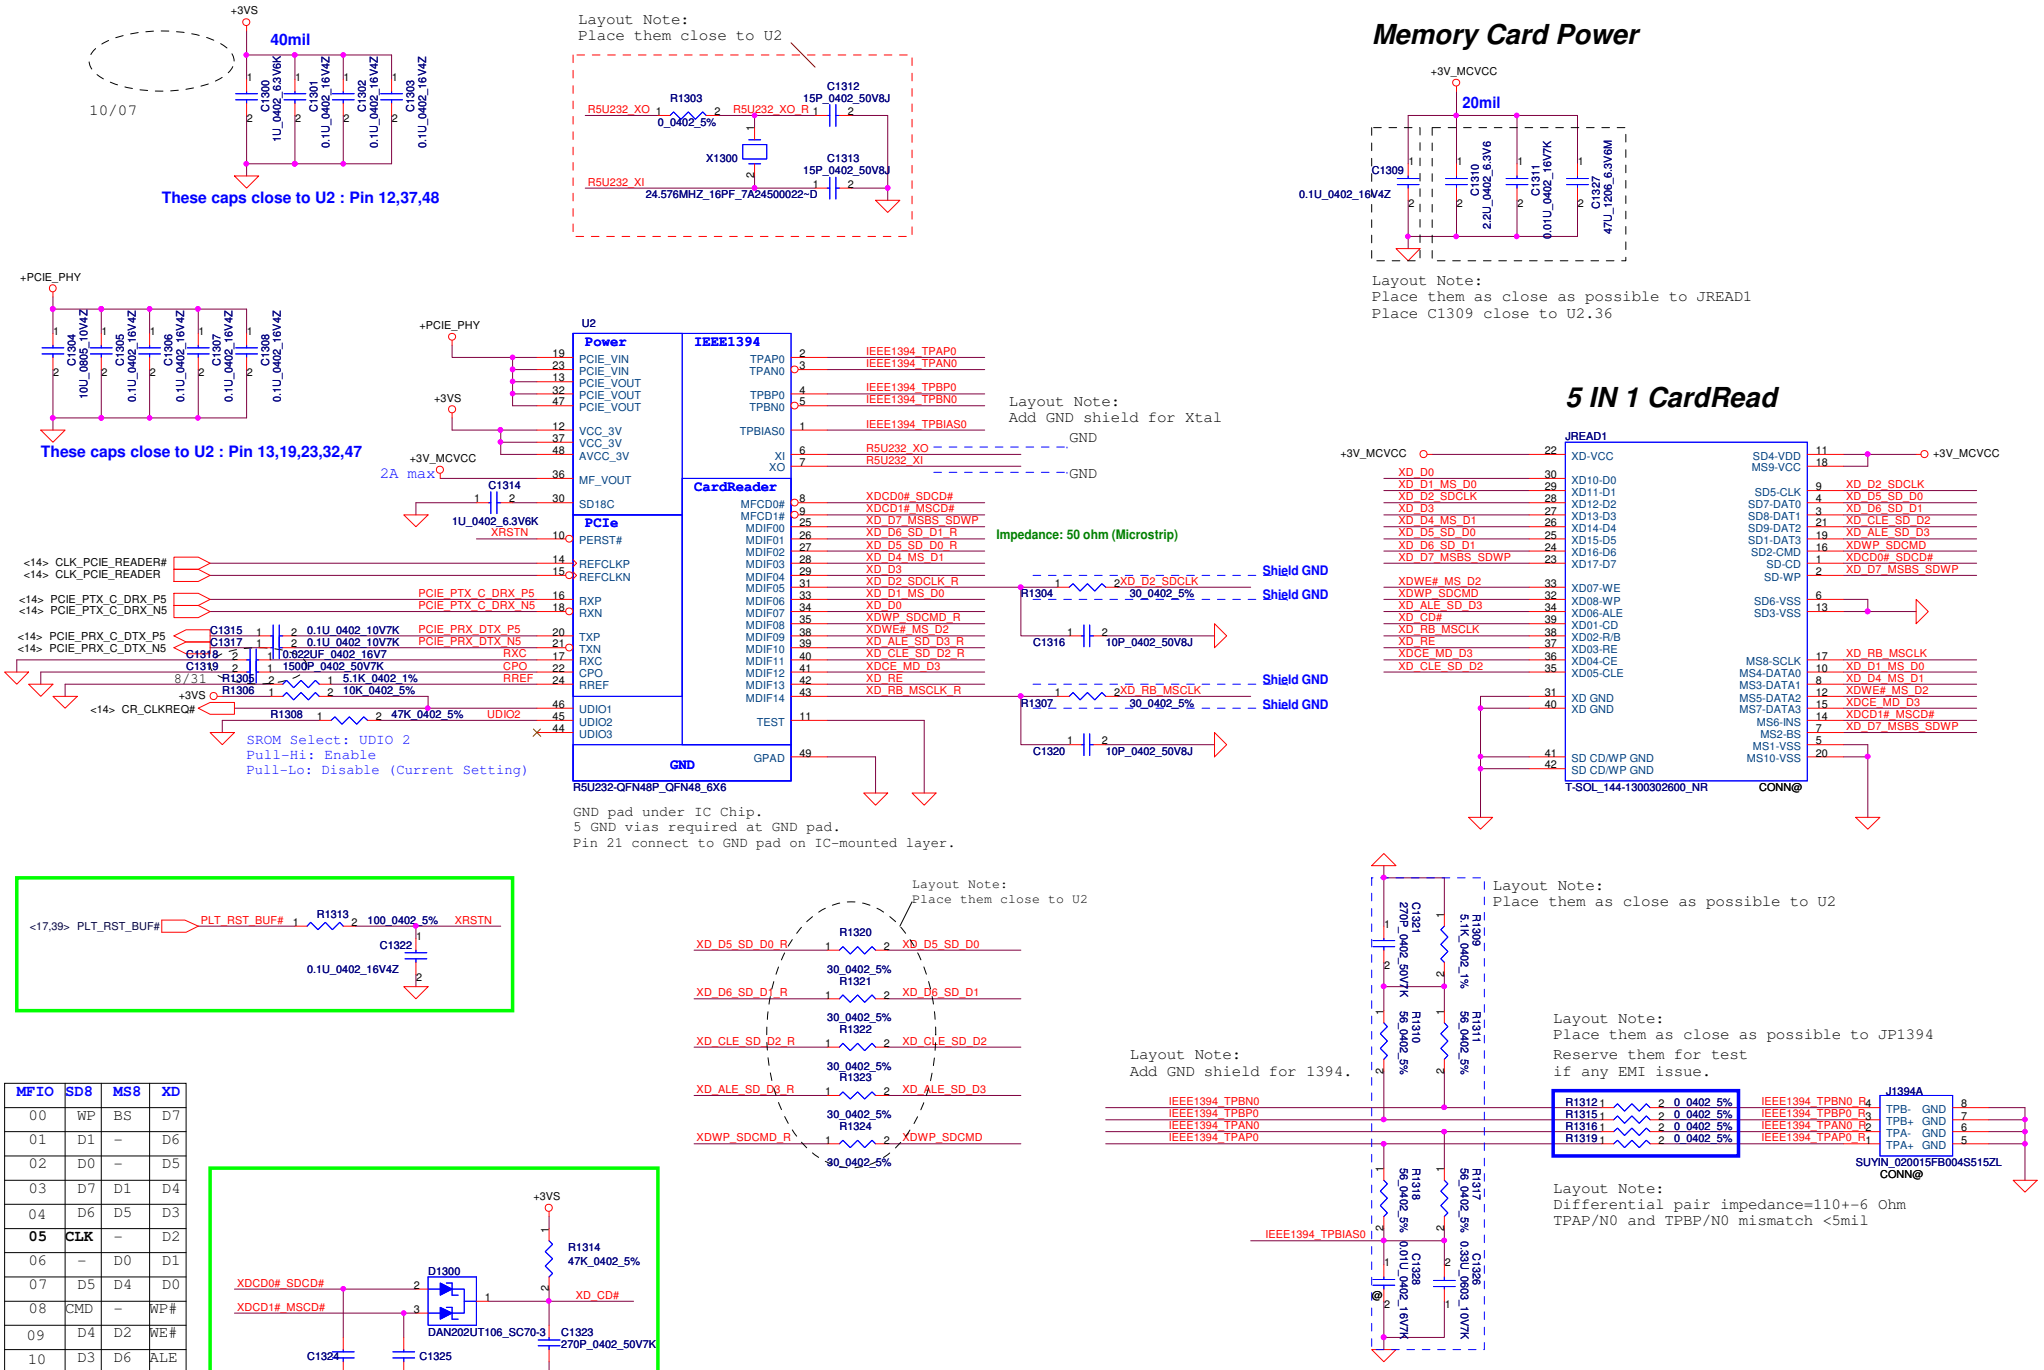

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: R5U232

Size: Custom | Document Number: LA-6931P | Rev: 1.0

Date: Wednesday, October 27, 2010 | Sheet 38 of 58

WLAN

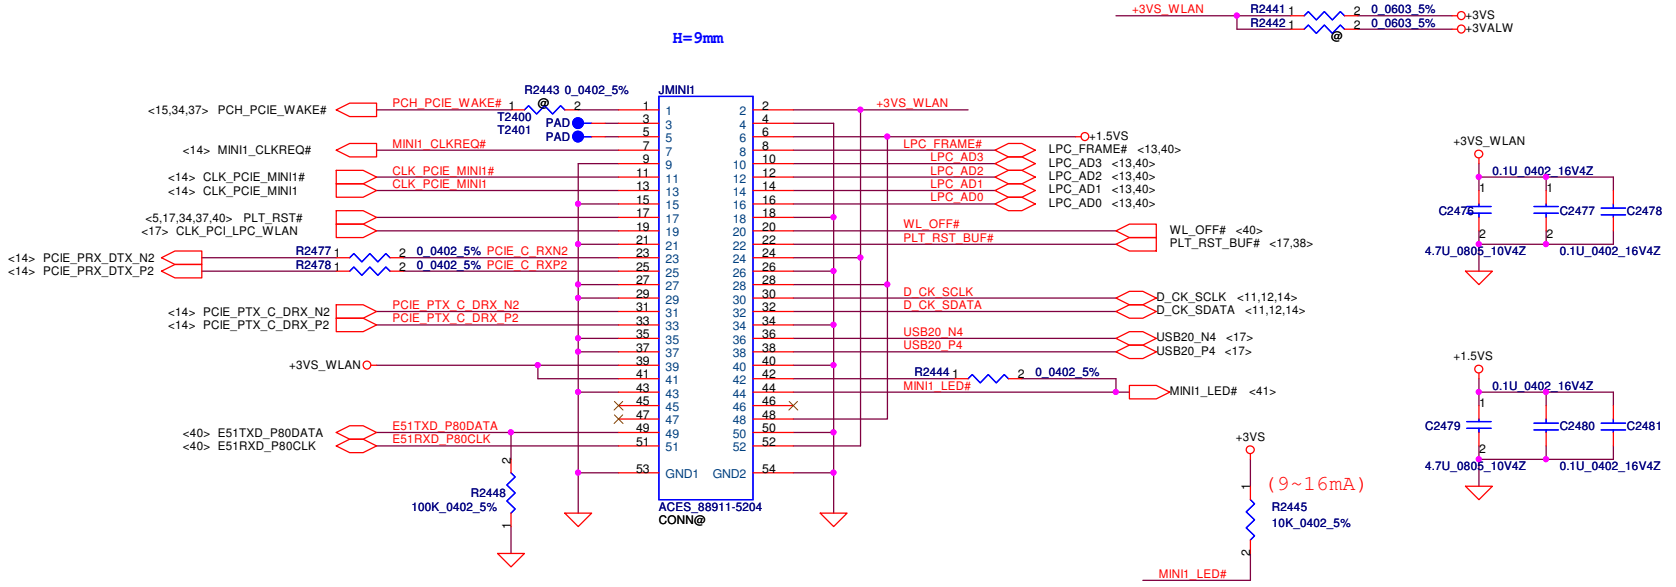

MINI

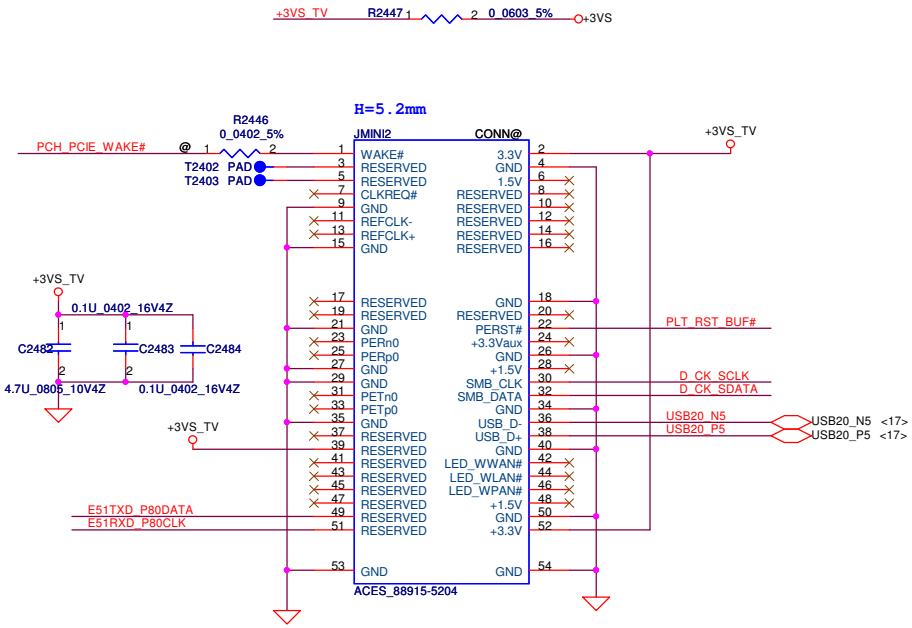

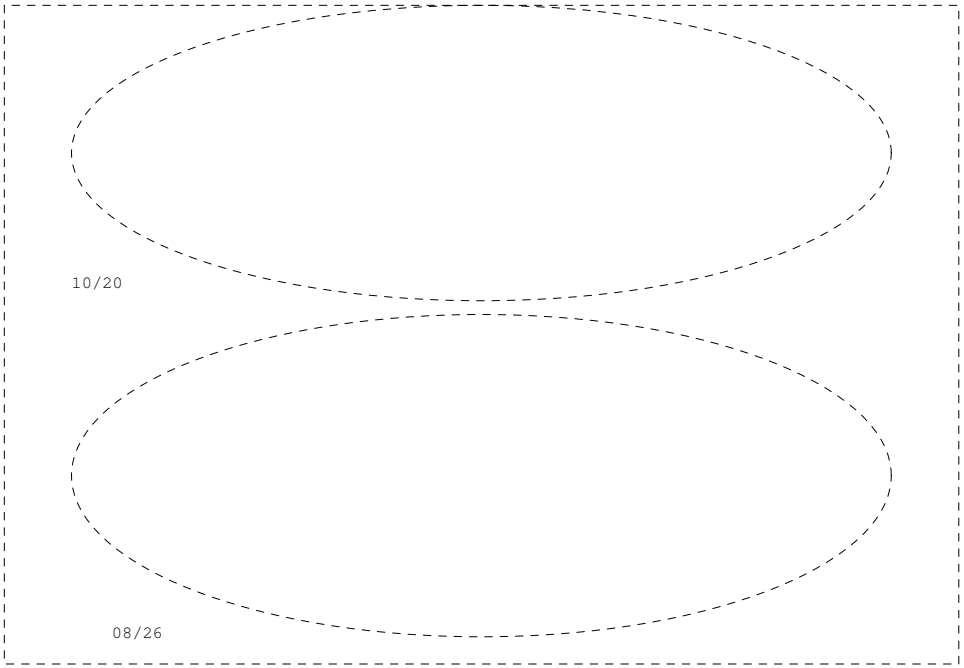

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: **WLAN&MINI**

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 39 of 58

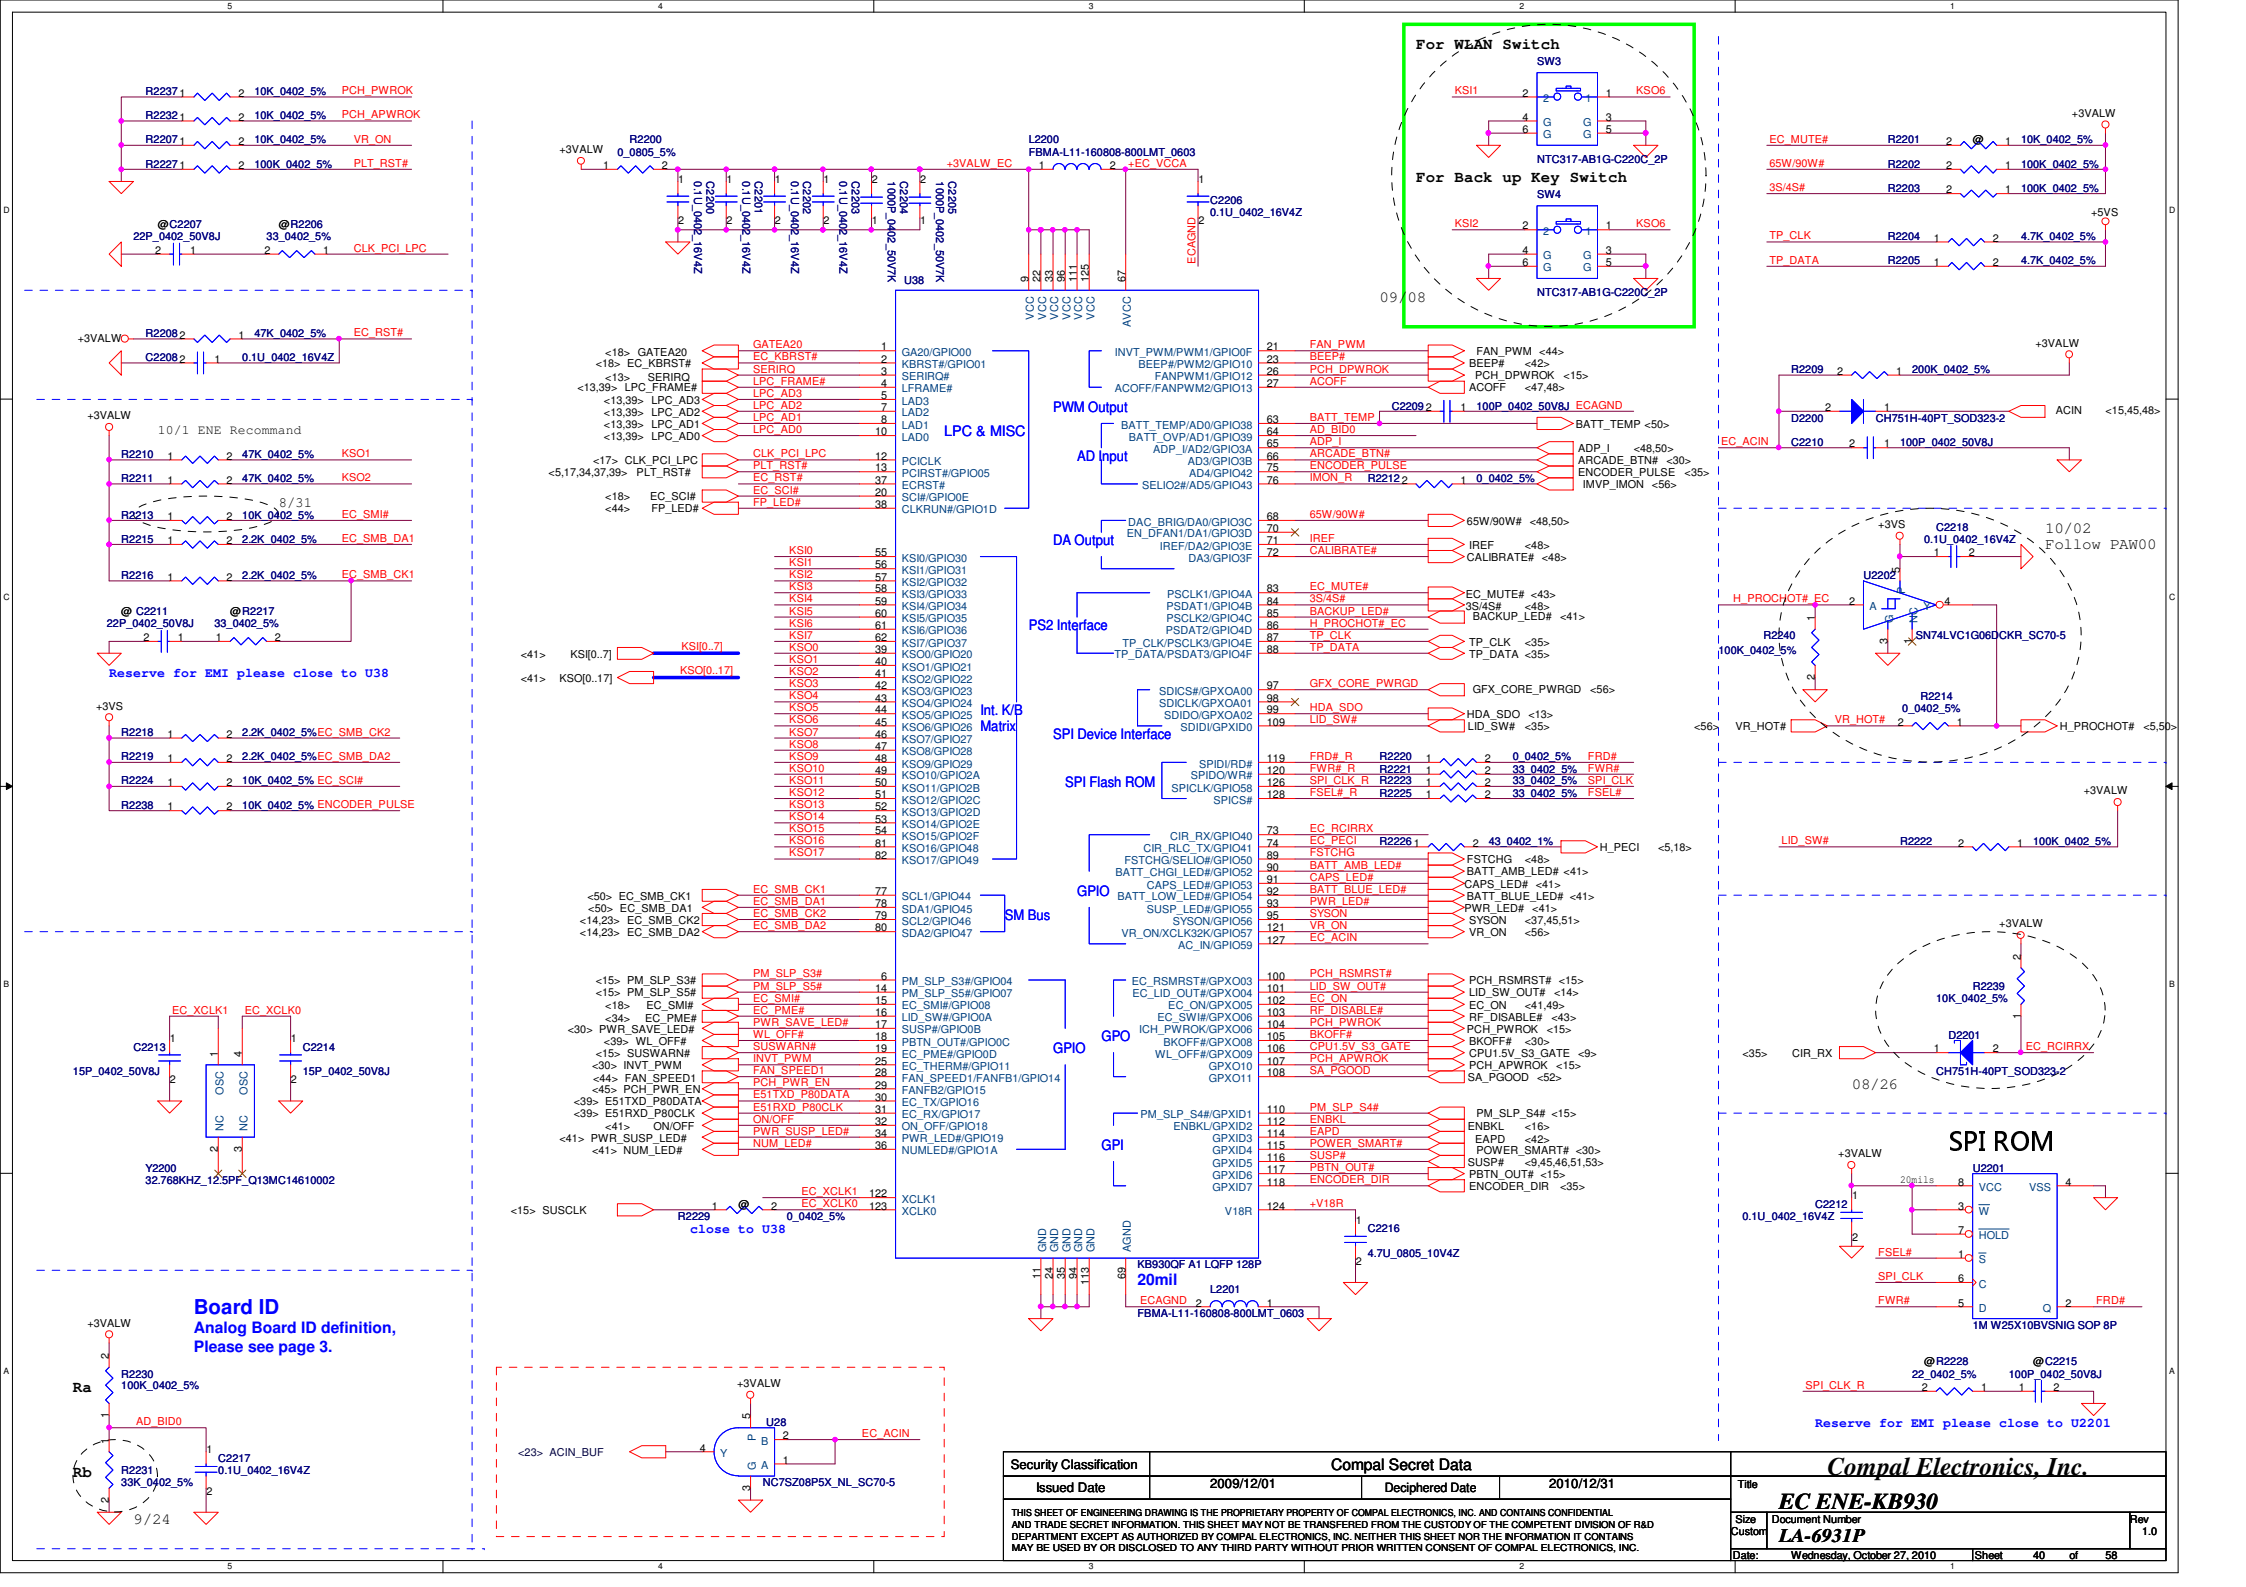

Security Classification	Compal Secret Data		
Issued Date	2009/12/01	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: EC ENE-KB930

Size: Custom | Document Number: LA-6931P | Rev: 1.0

Date: Wednesday, October 27, 2010 | Sheet 40 of 58

INT_KBD Conn.

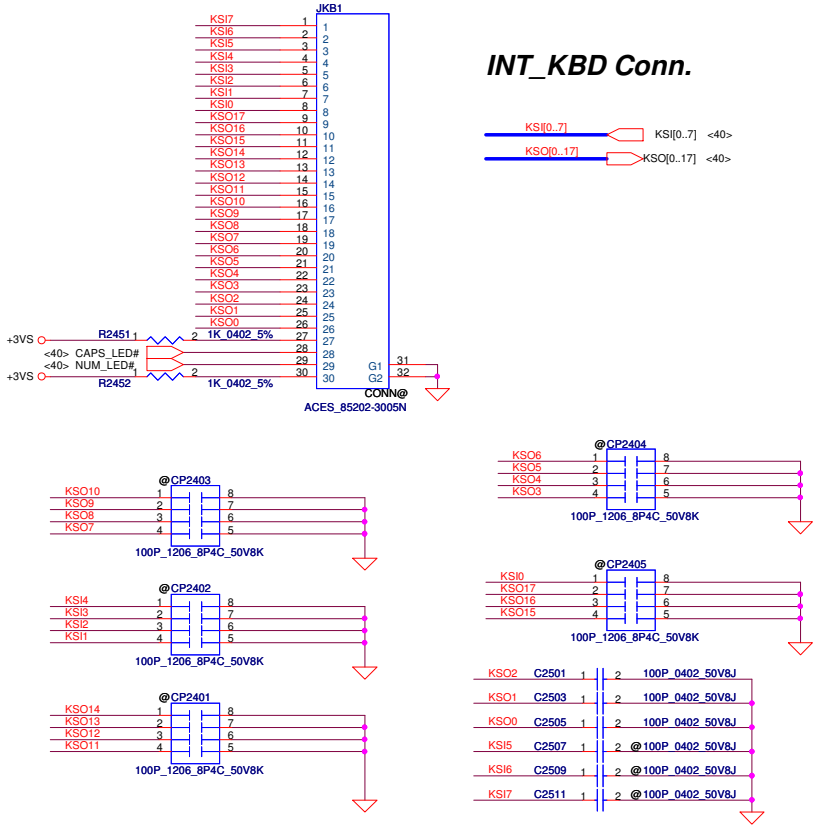

Power Button

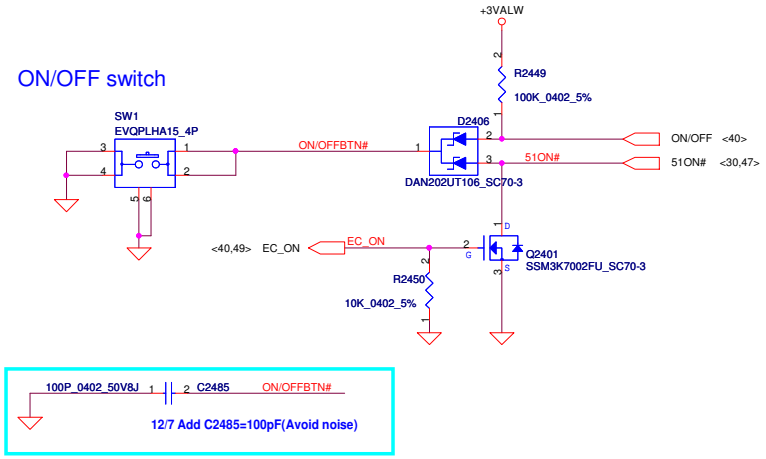

Power Conn

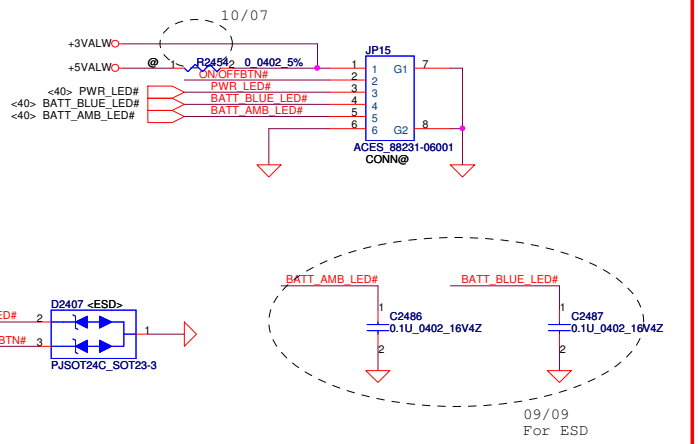

LED

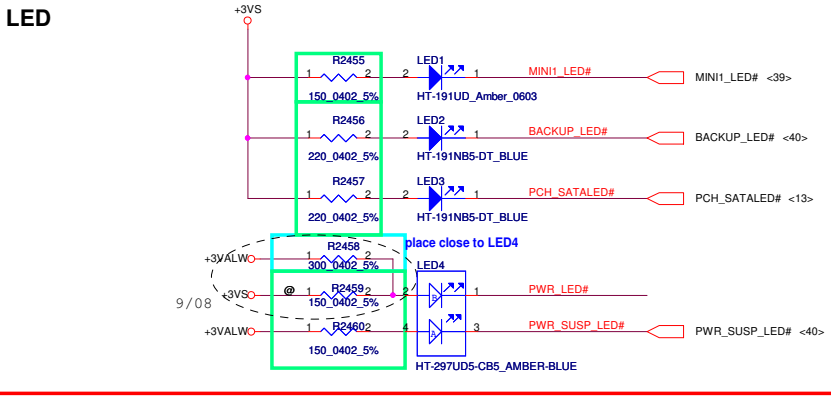

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: Power OK, I/O Port & K/B Connector

Size	Document Number	Rev
B	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 41 of 58

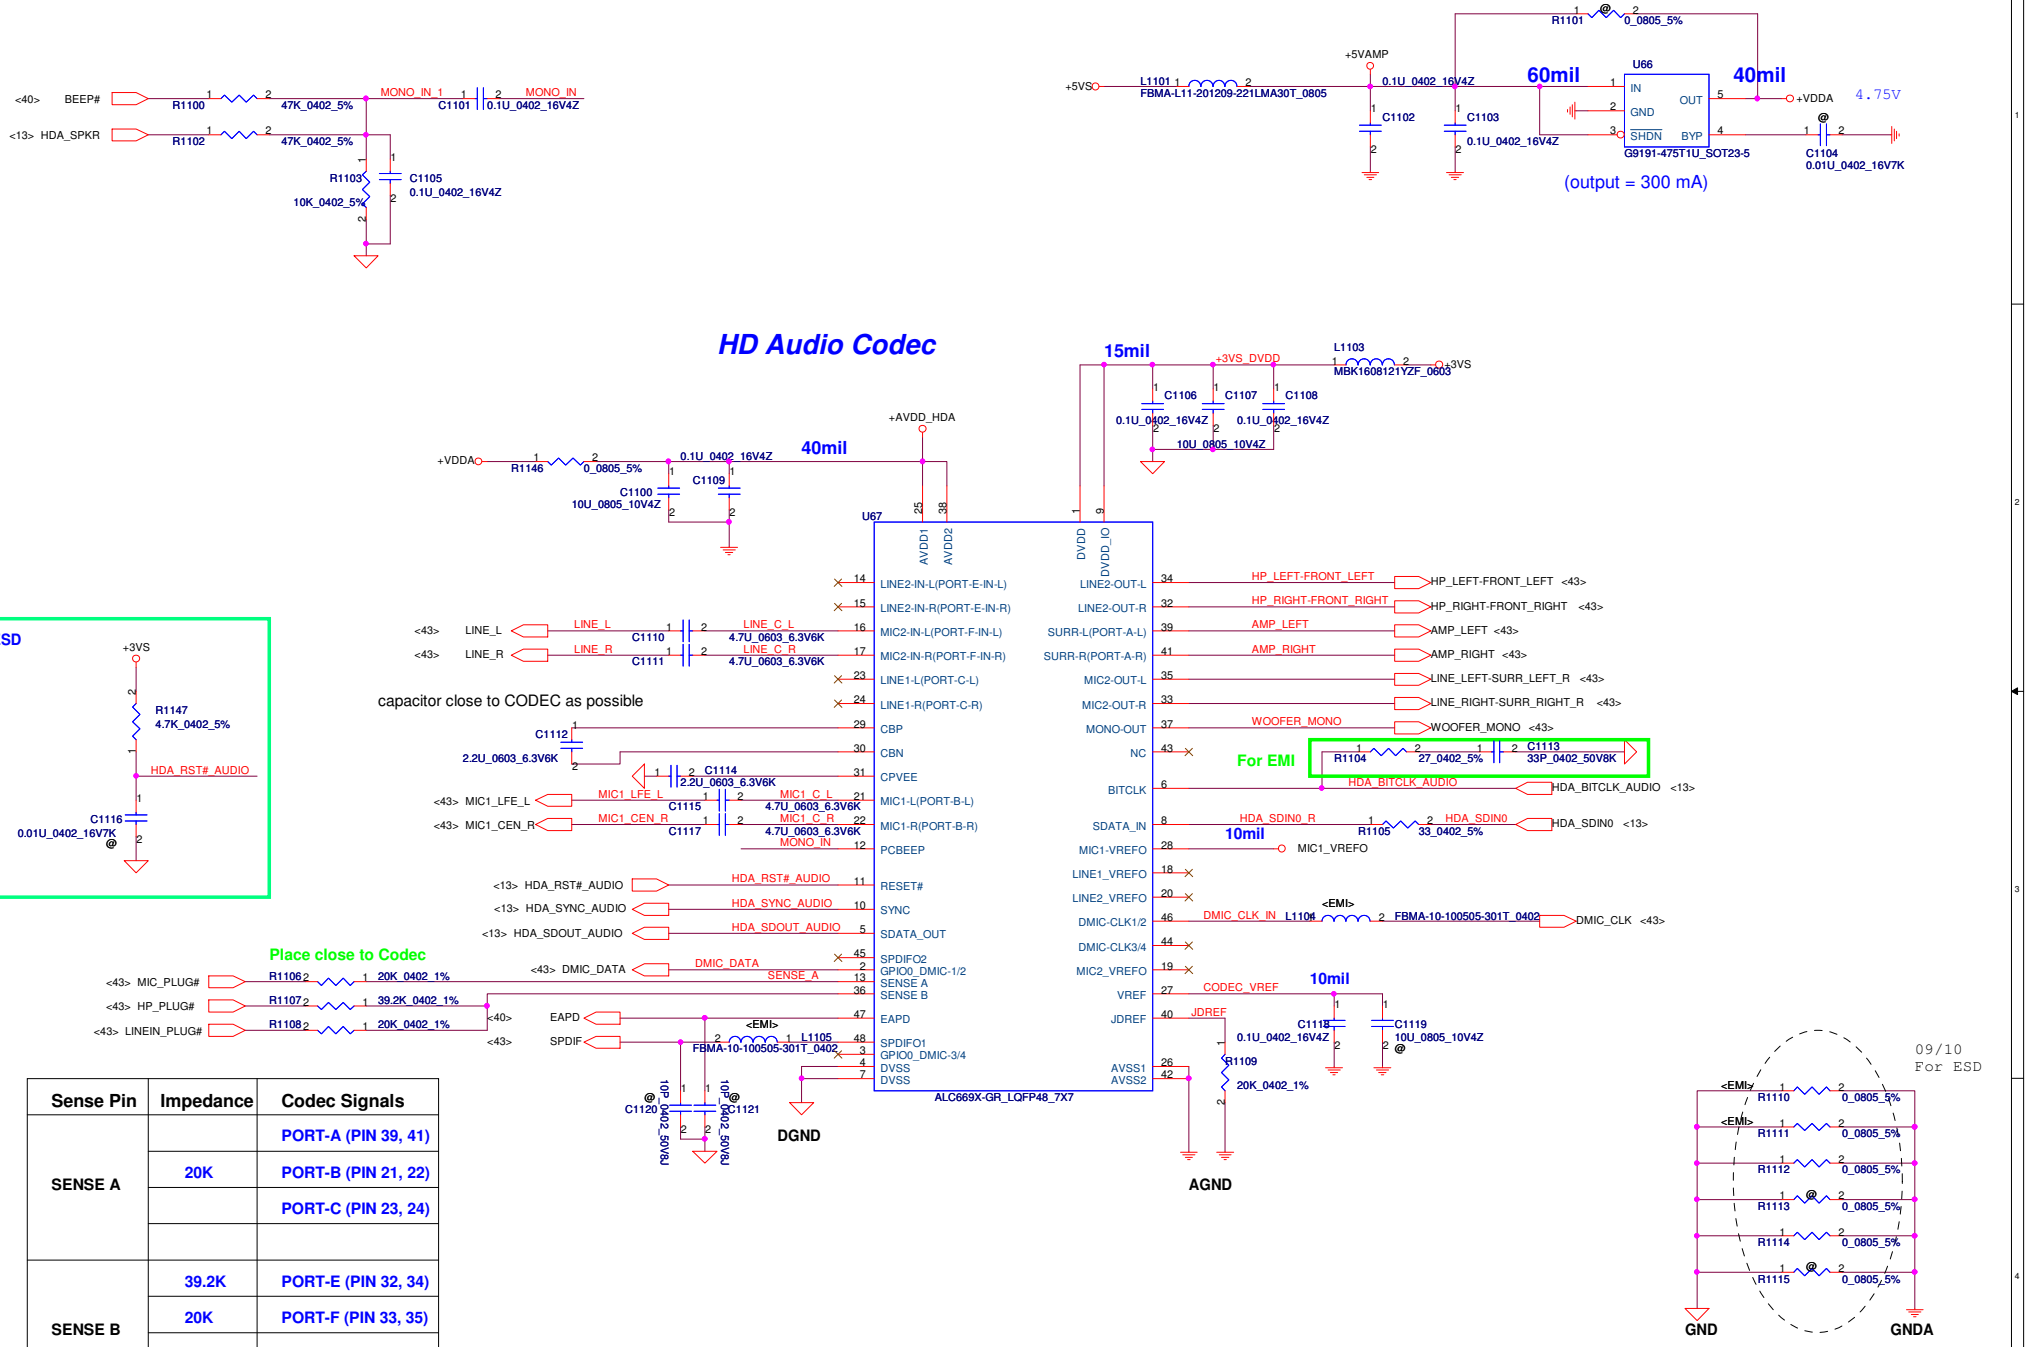

Sense Pin	Impedance	Codec Signals
SENSE A		PORT-A (PIN 39, 41)
	20K	PORT-B (PIN 21, 22)
		PORT-C (PIN 23, 24)
SENSE B	39.2K	PORT-E (PIN 32, 34)
	20K	PORT-F (PIN 33, 35)
		PORT-H (PIN 37)

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: HD Audio Codec ALC669X

Size	Document Number	Rev
B	LA-6931P	1.0

Date: Wednesday, October 27, 2010 | Sheet 42 of 58

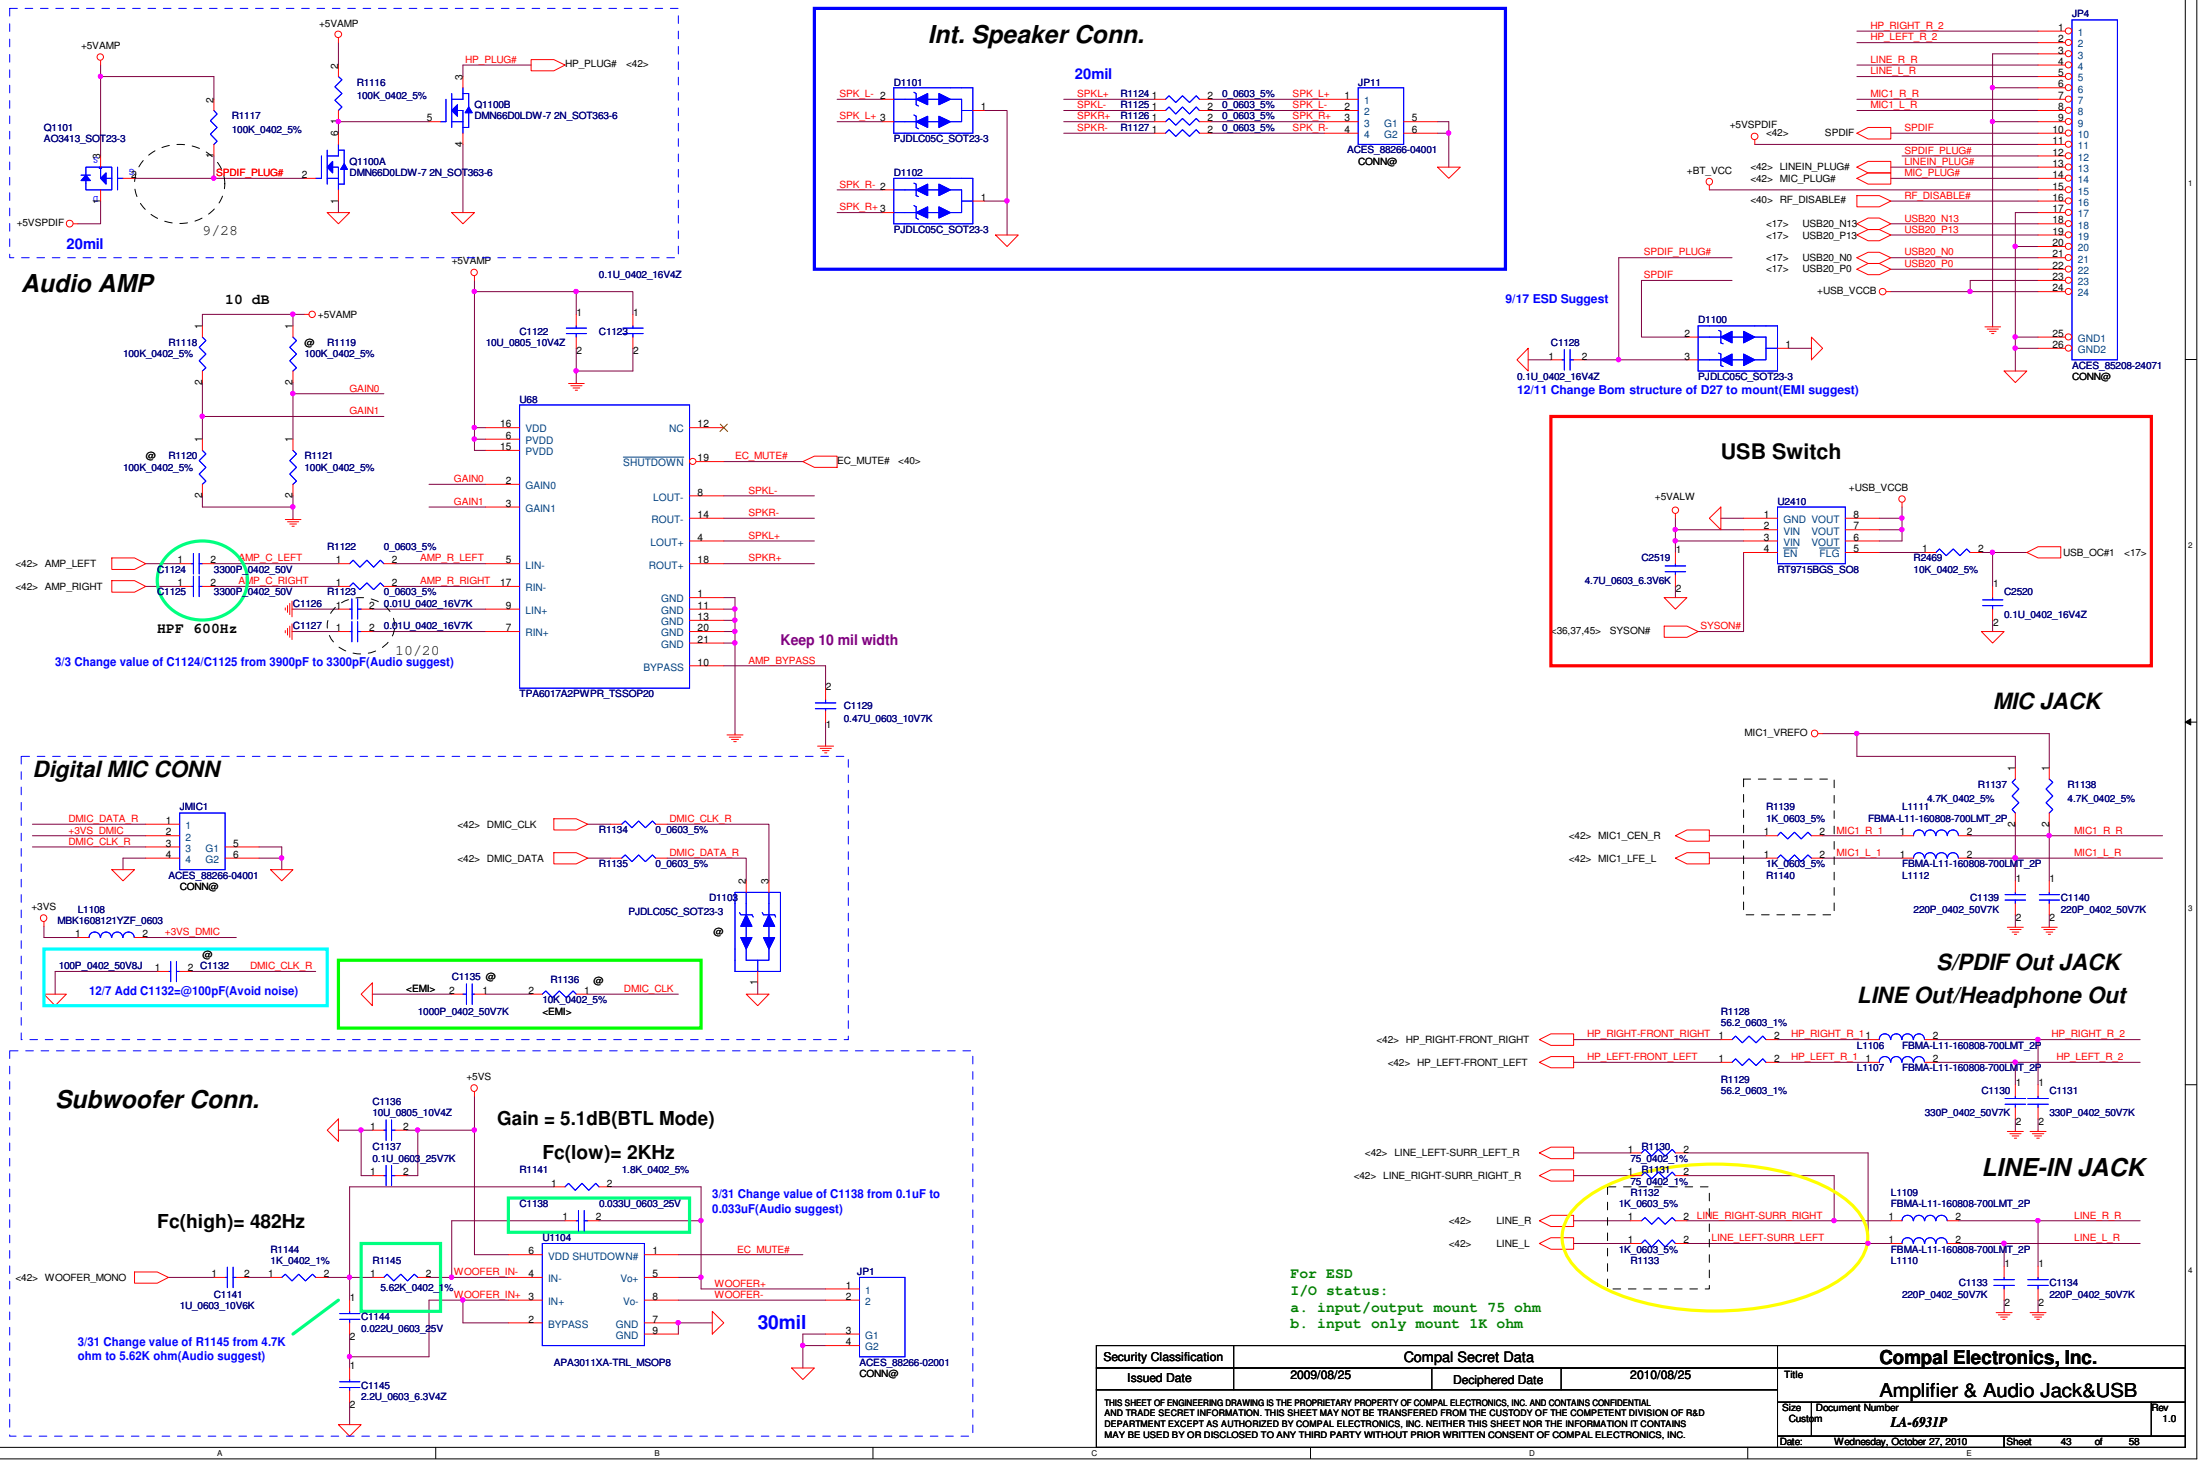

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: Amplifier & Audio Jack&USB

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 | Sheet 43 of 58

FAN1 Conn

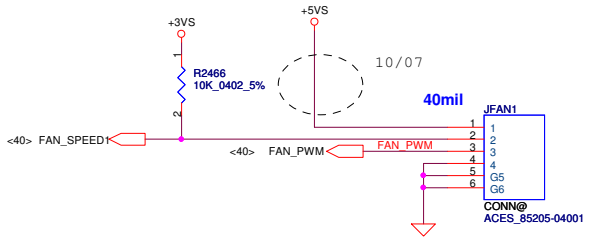

Finger Print board

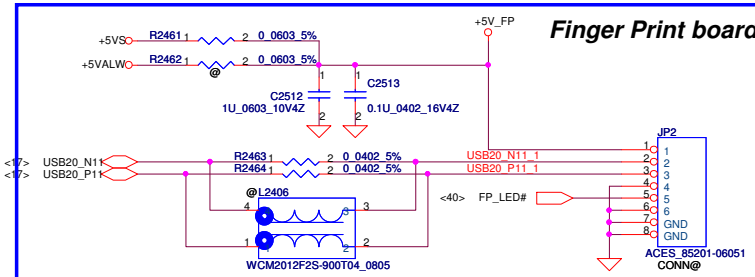

BT

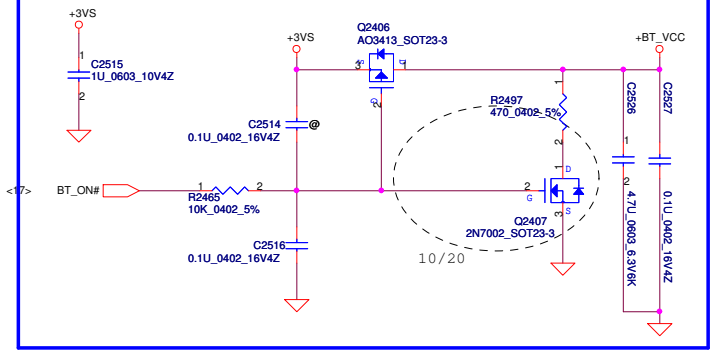

Screw

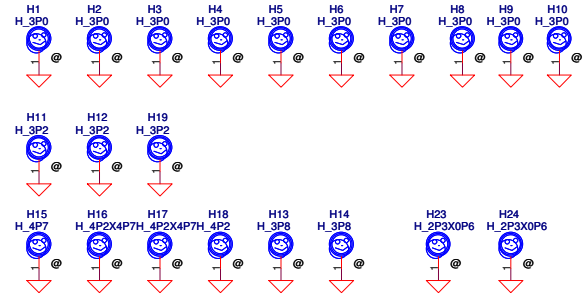

NON-PDH

2/25 Change footprint of H22

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: FAN & Screw Hole

Size	Document Number	Rev
B	LA-6931P	1.0

Date: Wednesday, October 27, 2010 Sheet 44 of 58

+5VALW TO +5VS

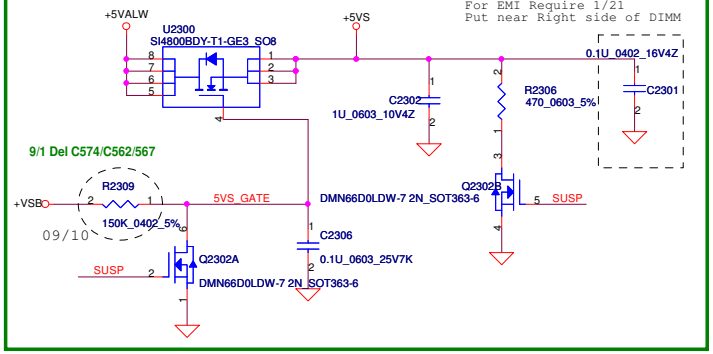

+3VALW TO +3VS

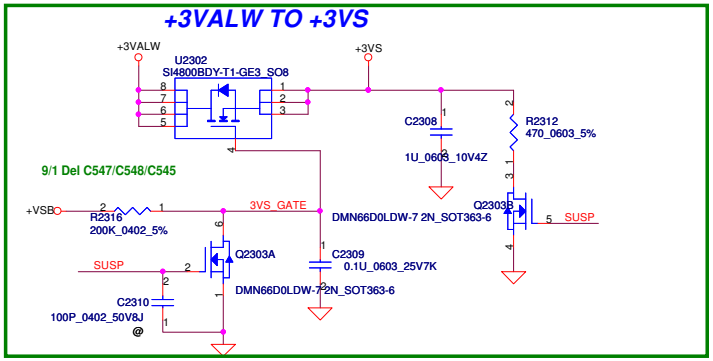

+1.5V to +1.5VS

Optional, if +1.5VS can combine with +1.5V_1

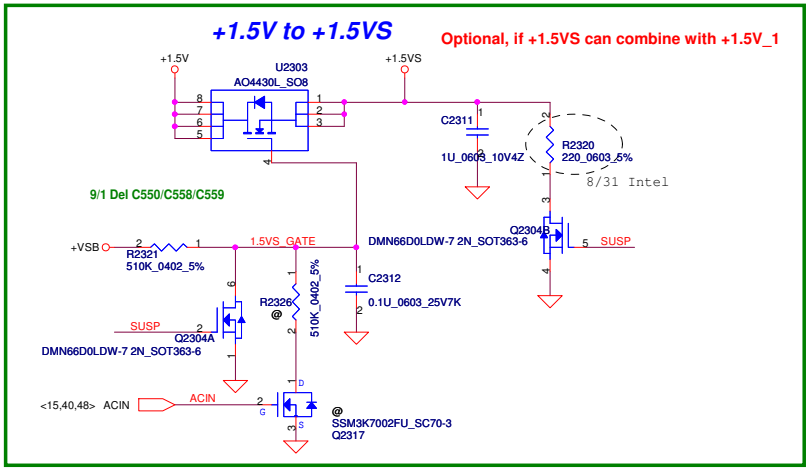

+3VALW TO +3VALW(PCH AUX Power)

Short J5 for PCH VCCSUS3.3

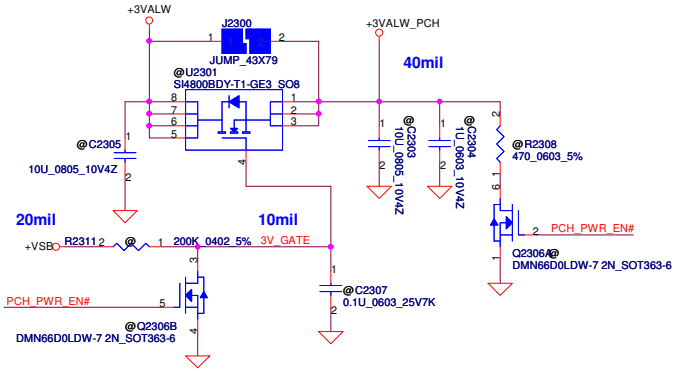

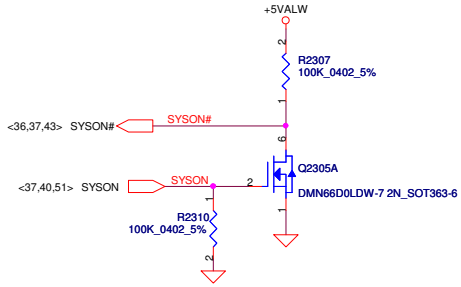

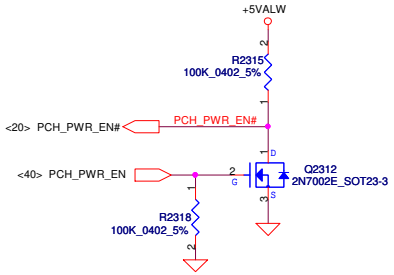

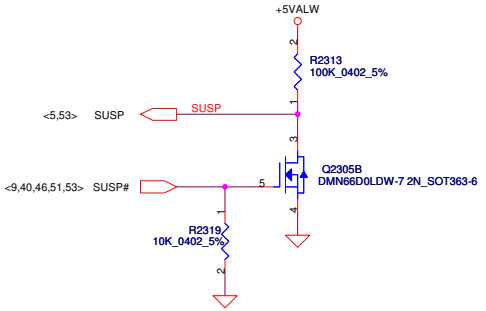

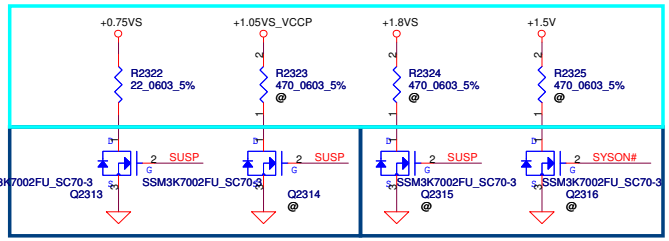

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: DC Interface

Size	Document Number	Rev
B	LA-6931P	1.0

Date: Wednesday, October 27, 2010 | Sheet 45 of 58

+1.5VS to +1.5VSDGPU Transfer

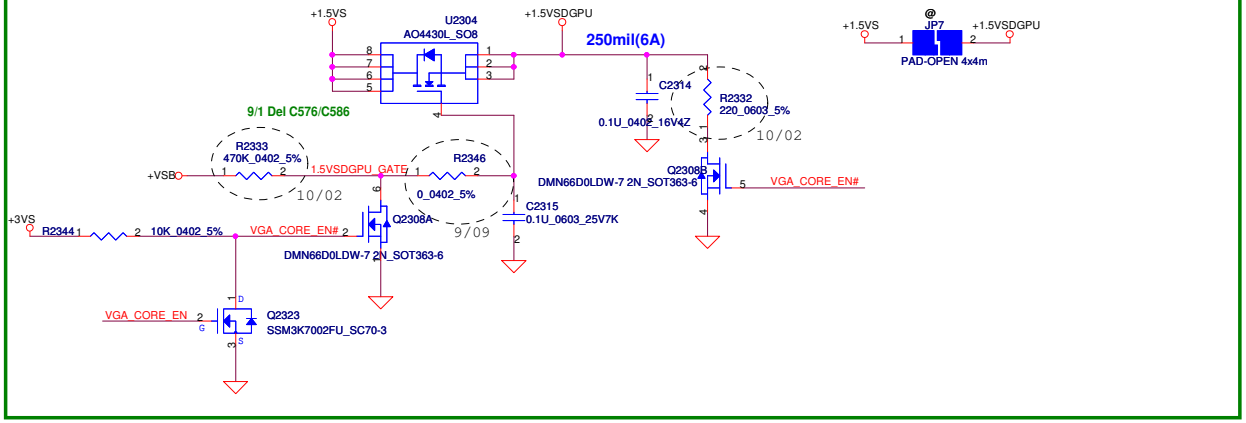

+1.8VS to +1.8VSDGPU Transfer

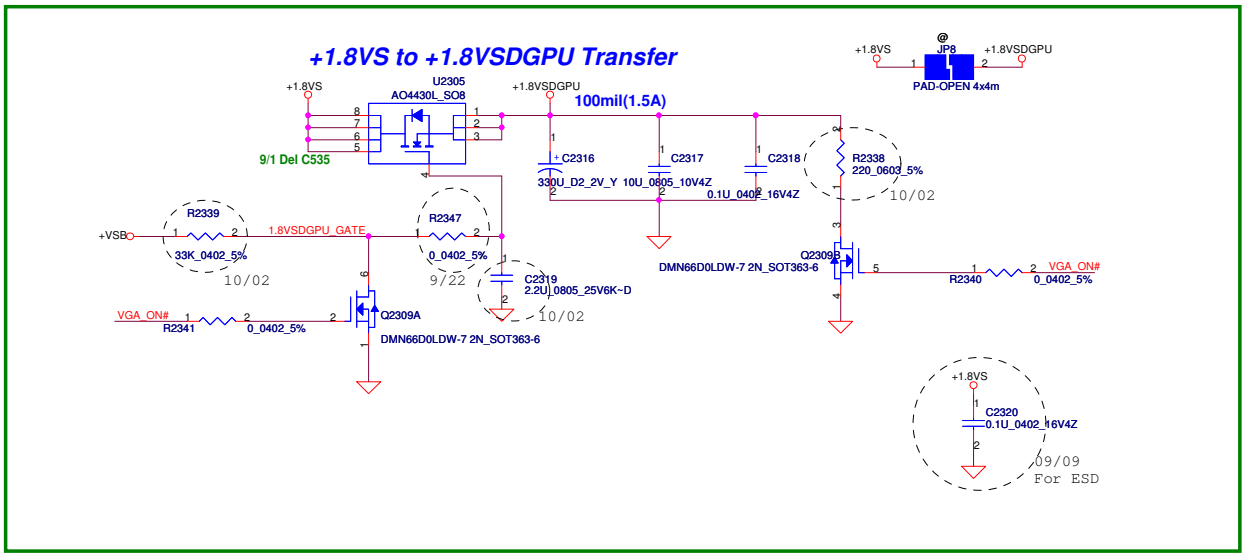

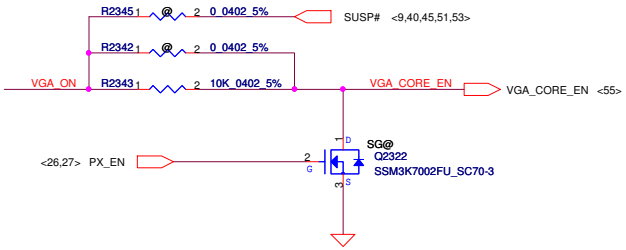

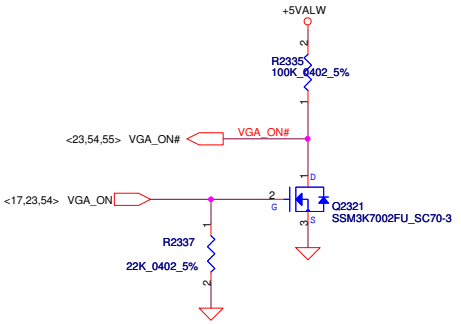

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: VGA DC Interface

Size	Document Number	Rev
B	LA-6931P	1.0

Date: Wednesday, October 27, 2010 | Sheet 46 of 58

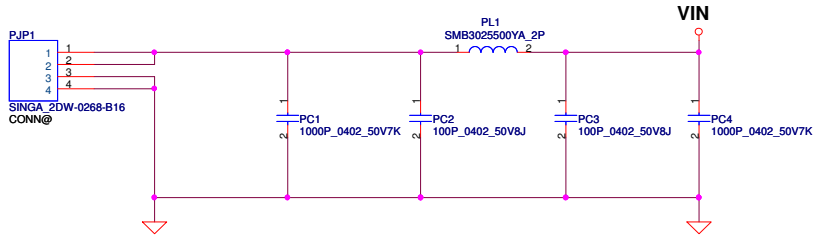

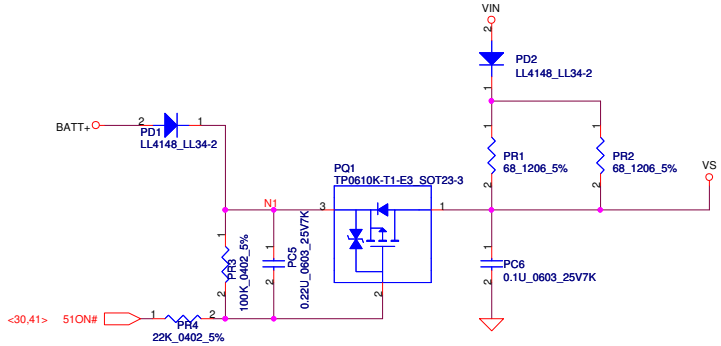

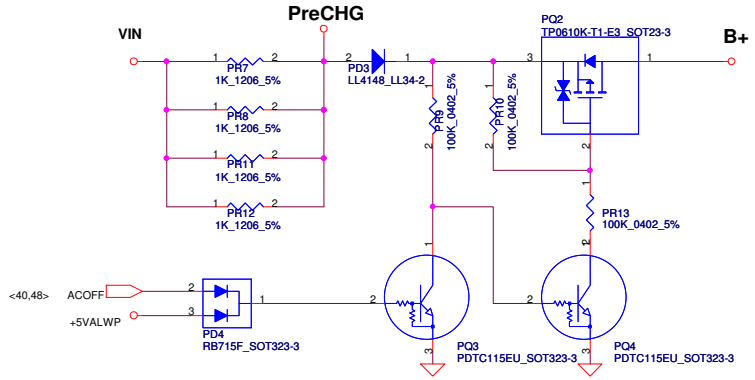

Security Classification	Compal Secret Data		
Issued Date	2010/01/25	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PWR DCIN / Pre-charge

Size: Custom | Document Number: LA-6931P | Rev: 0.1

Date: Wednesday, October 27, 2010 | Sheet 47 of 10

Iada=0~4.74A(90W/19V=4.736A)

ADP_I = 19.9*Iadapter*Rsense

CP = 85%*Iada ; CP = 4.07A

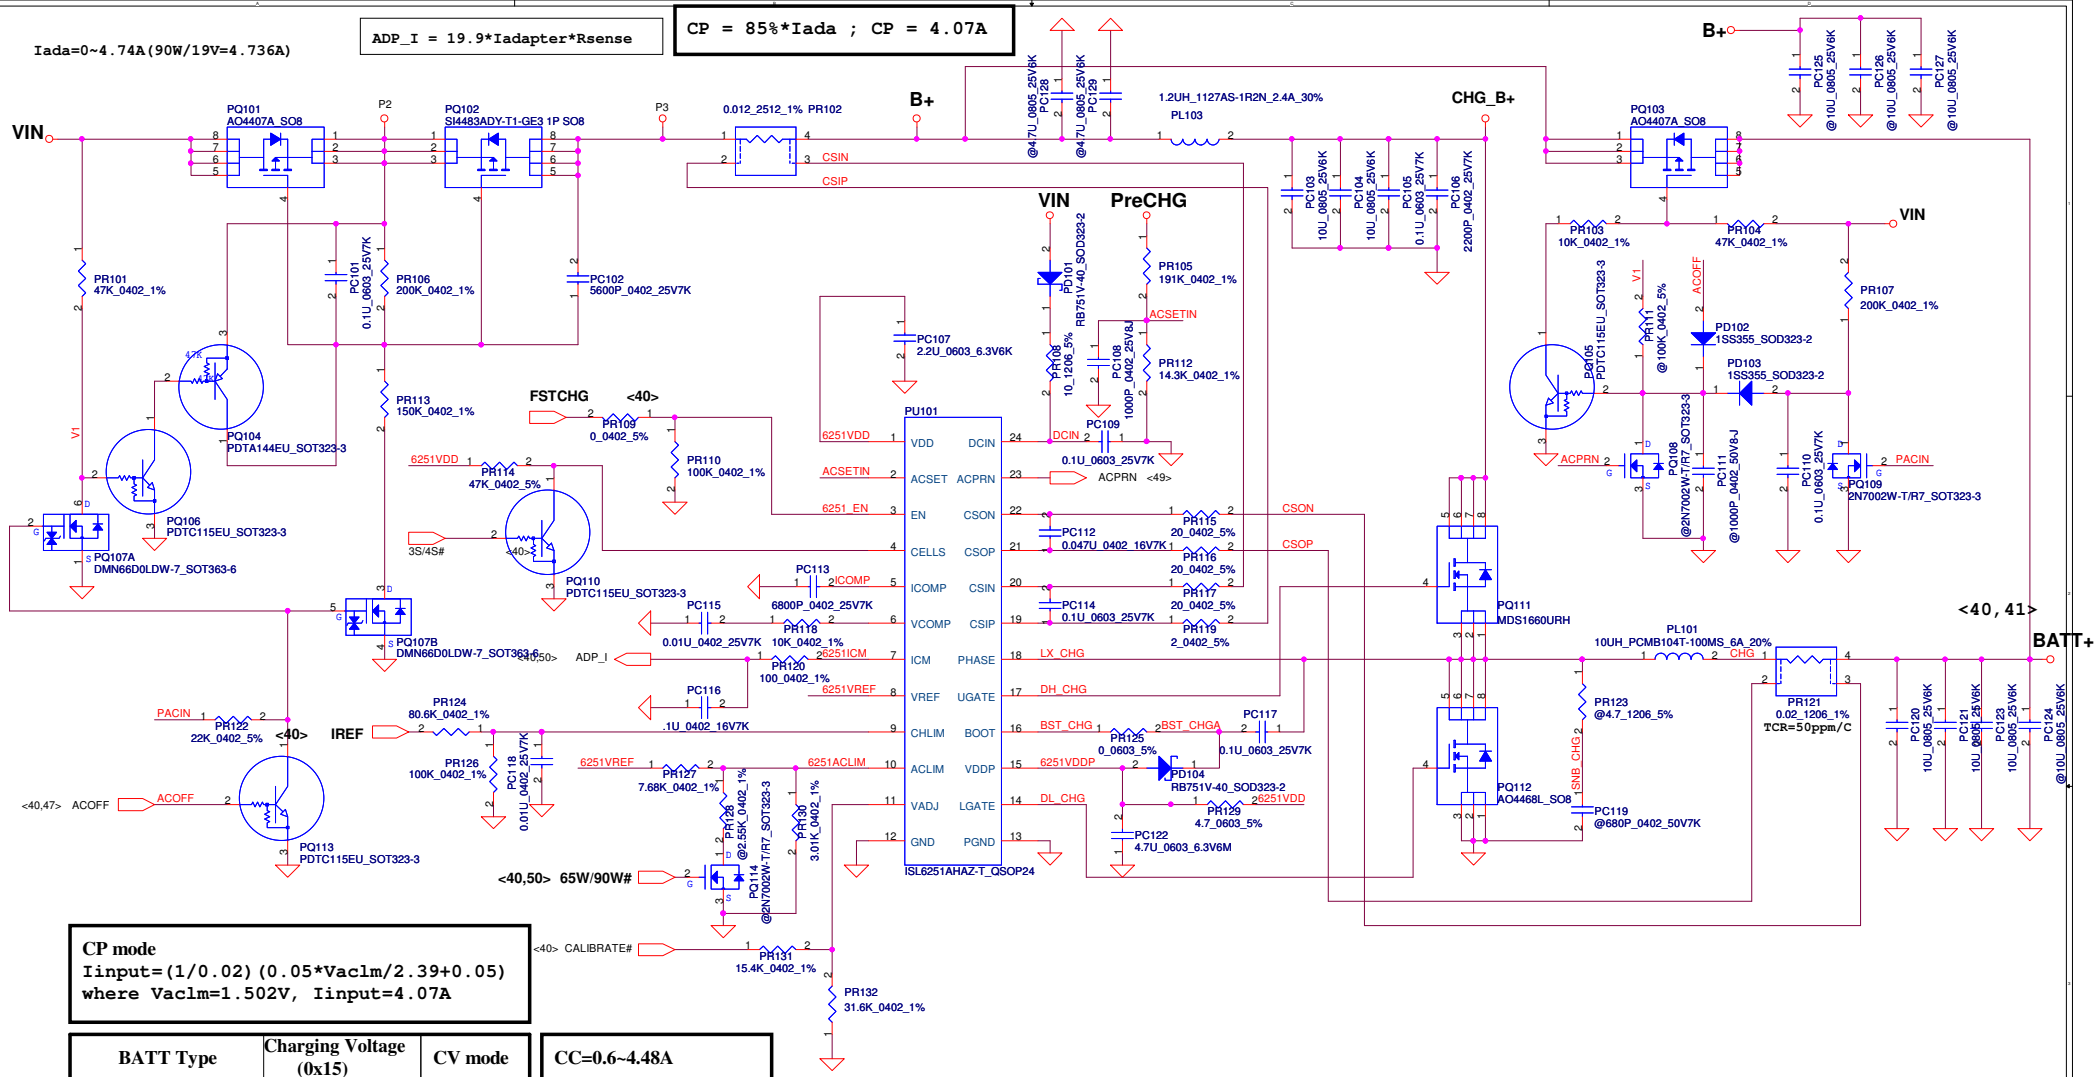

CP mode

$$I_{input} = (1/0.02)(0.05 * V_{aclim}/2.39 + 0.05)$$

where $V_{aclim} = 1.502V$, $I_{input} = 4.07A$

BATT Type	Charging Voltage (0x15)	CV mode
Normal 3S LI-ON Cells	12600mV	12.60V

CC=0.6~4.48A

IREF=0.7224*Icharge

IREF=0.43V~3.24V

Ki

Vchlim=Iref*(PR374/(PR372+PR374))
=Iref*(100K/(80.6K+100K))
=Iref*0.5537
Ichanrge=(165mV/PR369)*(Vchlim/3.3V)
=(165m/20m)*(1/3.3V)*Iref*0.5537
=1.3842*Iref
Iref=0.7224*Ichanrge =>Ki=0.7224

Kv

Rinternal ic=514K Rec=3K R1=PR379=15.4K R2=PR381=31.6K
R=514K//31.6K//(15.4K+3k)=11.372K
r=514K//514K//31.6K=28.14K
Vcell=0.175*Vadj+3.99v
4.2V=0.175*Vadj+3.99V =>Vadj=1.2V
Vadj=Vref*(R/(R+514K))+CALIBRATE*(r/(r=514K))
1.1483=CALIBRATE*0.6046 =>CALIBRATE=1.899
1.899=(4.2-(Vcell+A*0.175))*Kv=(4.2-(4.2+A*0.175))*Kv
A=Vref*(R/(R+514K))=0.052
Kv=9.451

Security Classification	Compal Secret Data		
Issued Date	2010/01/25	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: PWR-CHARGER

Size: Custom | Document Number: LA-6931P | Rev: 0.1

Date: Wednesday, October 27, 2010 | Sheet 48 of 10

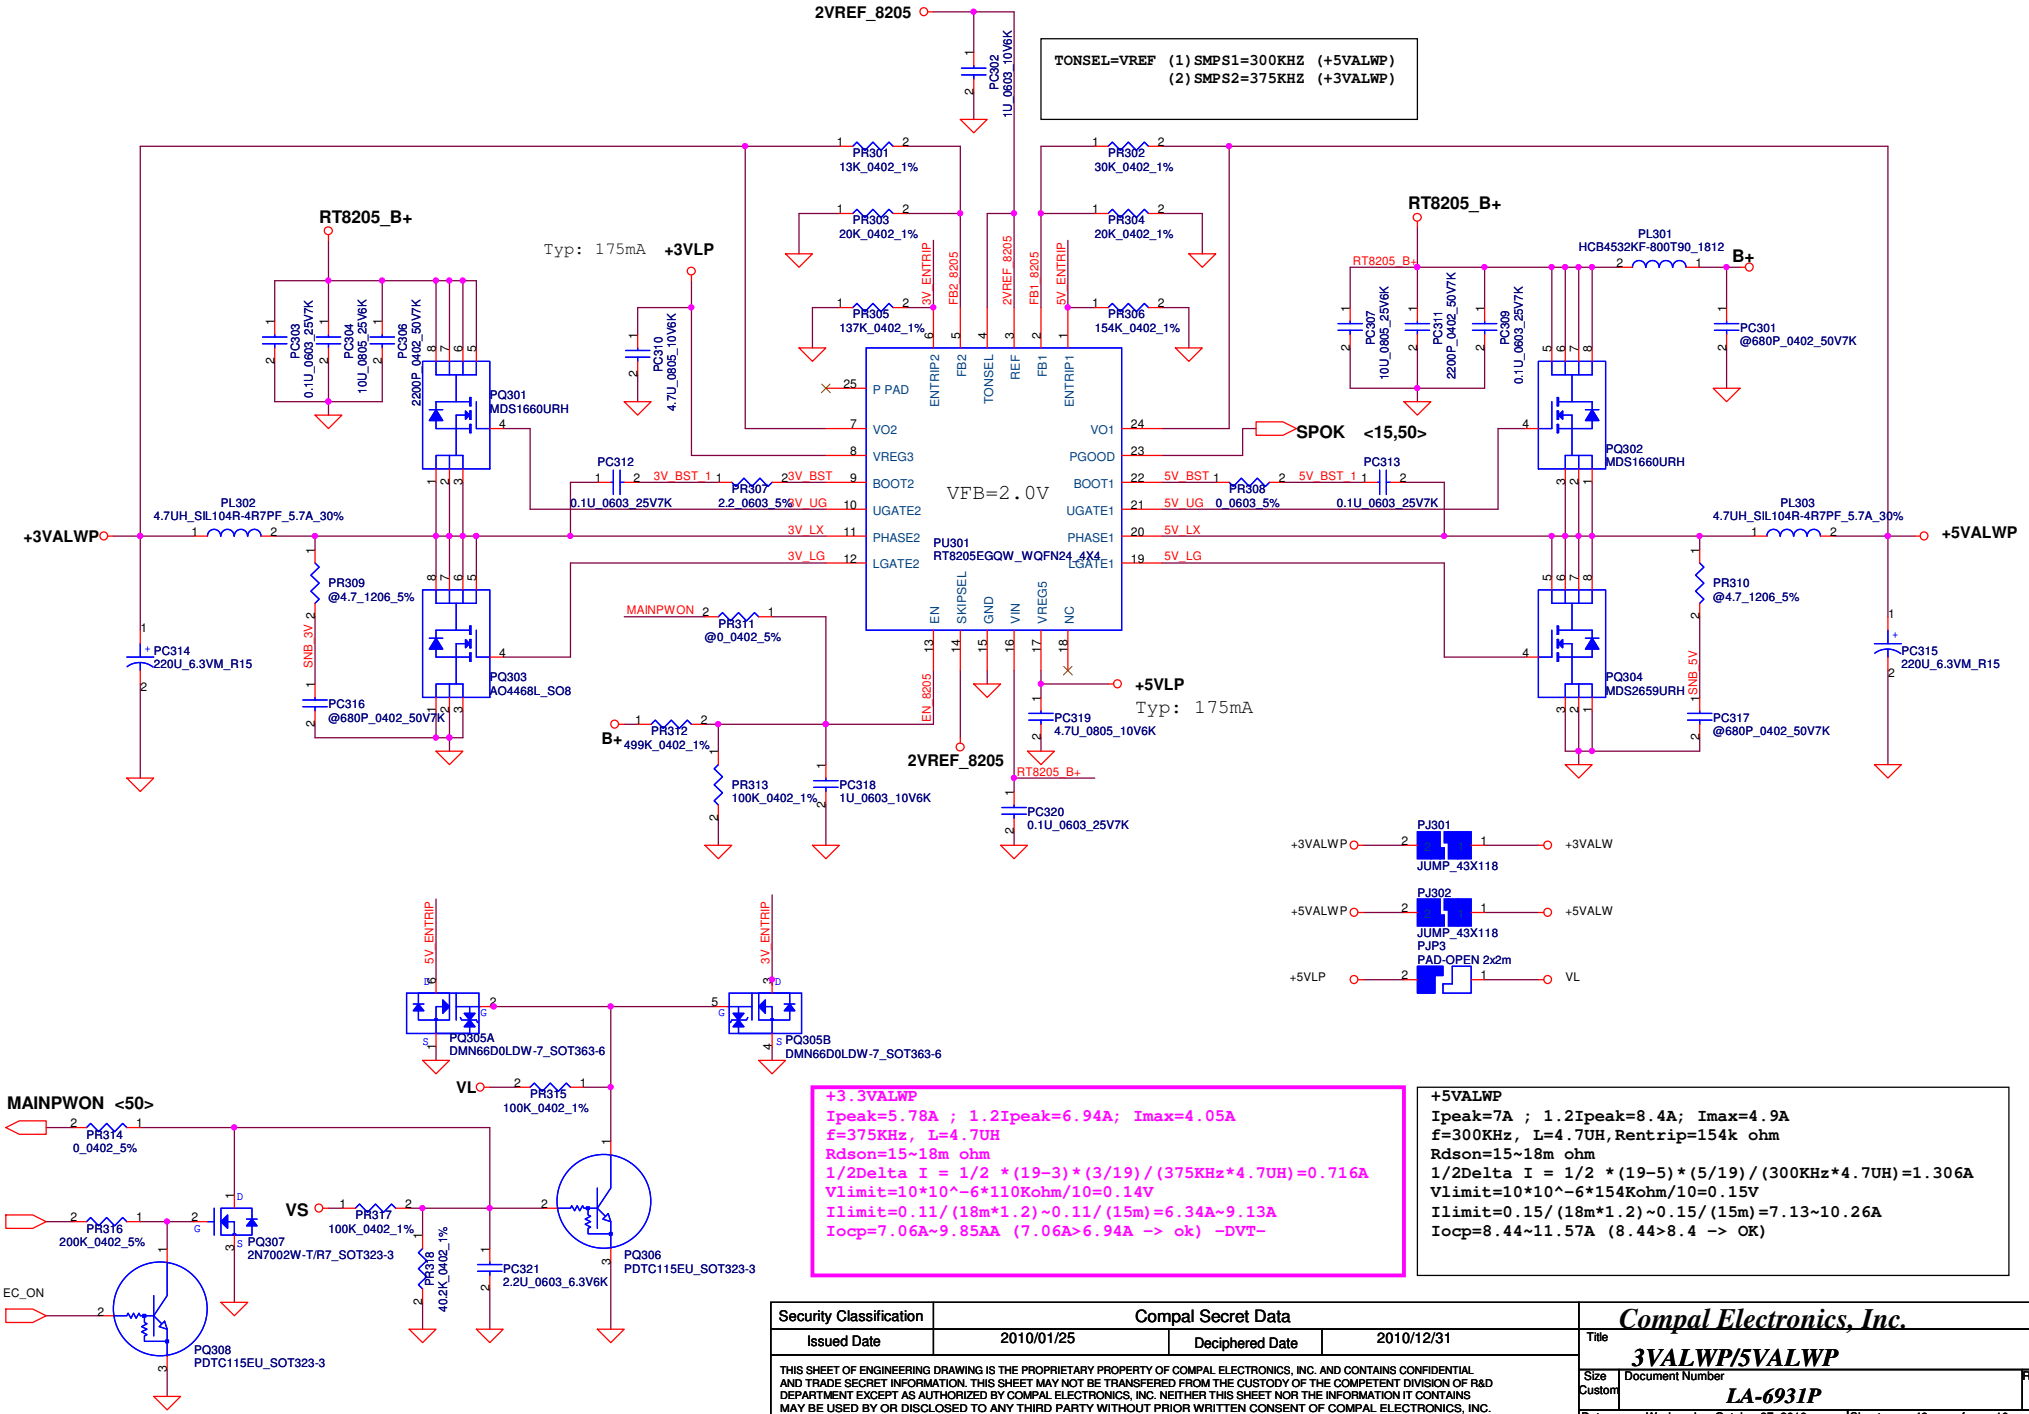

Security Classification	Compal Secret Data		
Issued Date	2010/01/25	Deciphered Date	2010/12/31

Compal Electronics, Inc.

Title: 3VALWP/5VALWP

Size: Custom | Document Number: LA-6931P | Rev: 0.1

Date: Wednesday, October 27, 2010 | Sheet 49 of 10

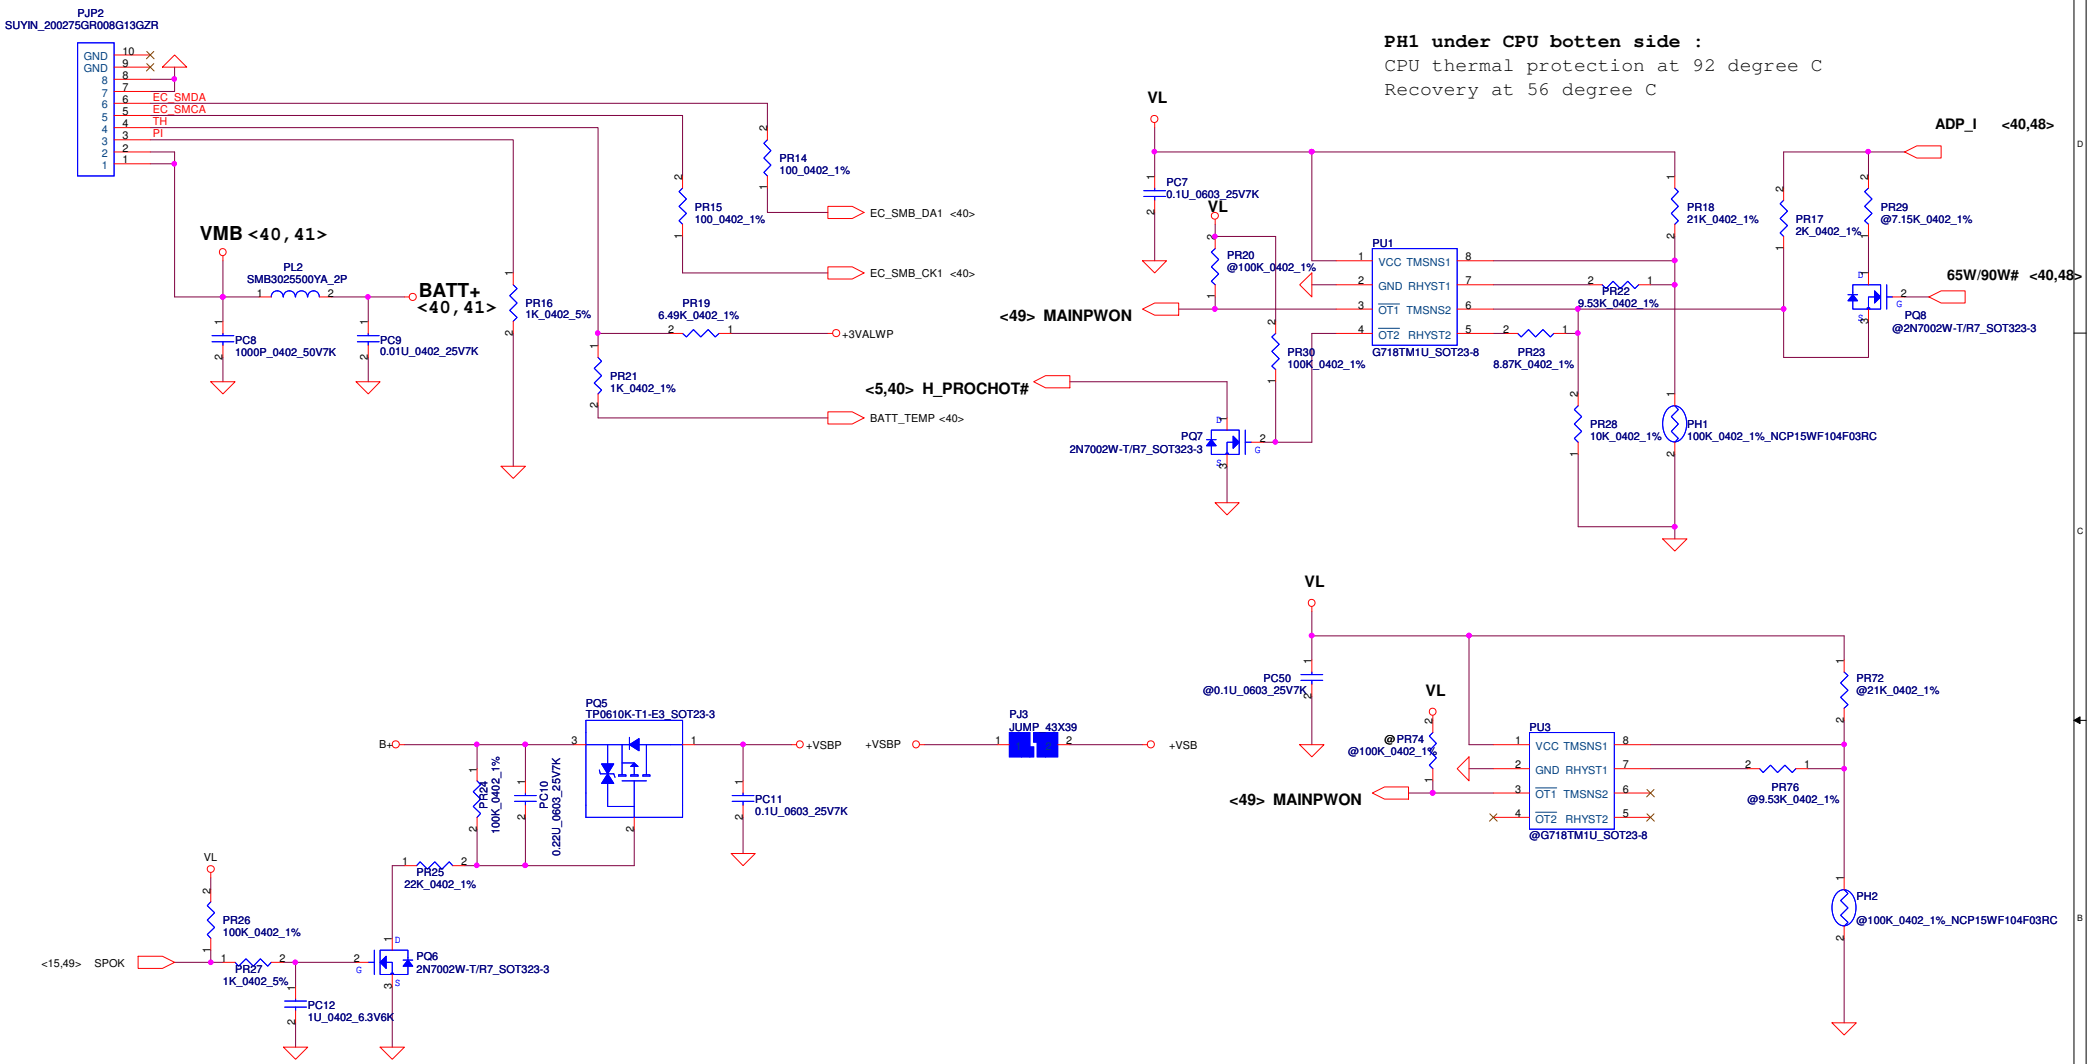

Security Classification	Compal Secret Data		
Issued Date	2010/01/25	Deciphered Date	2010/12/31

Compal Electronics, Inc.		
Title	PWR-BATTERY CONN/OTP	
Size: Custom	Document Number: LA-6931P	Rev: 0.1
Date: Wednesday, October 27, 2010	Sheet 50 of 10	

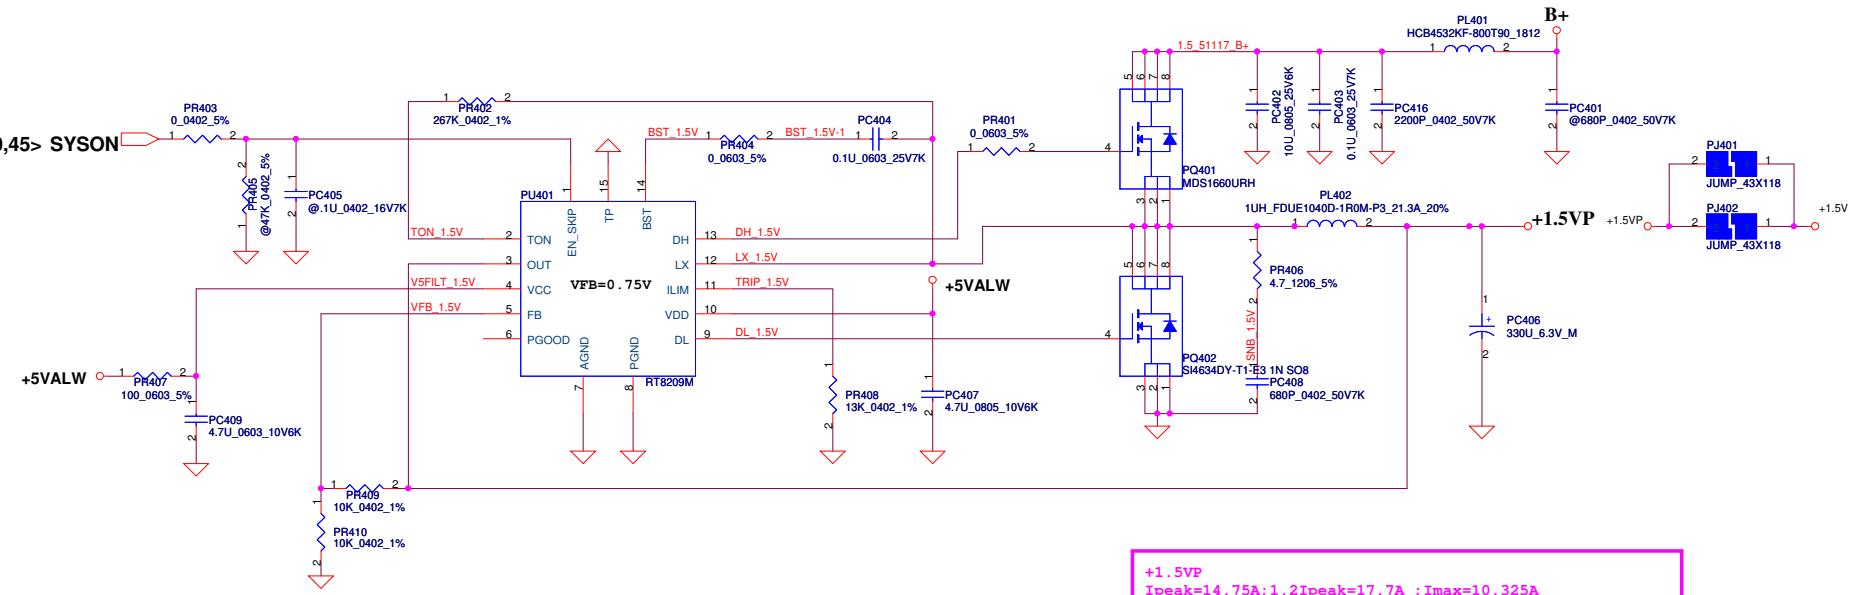

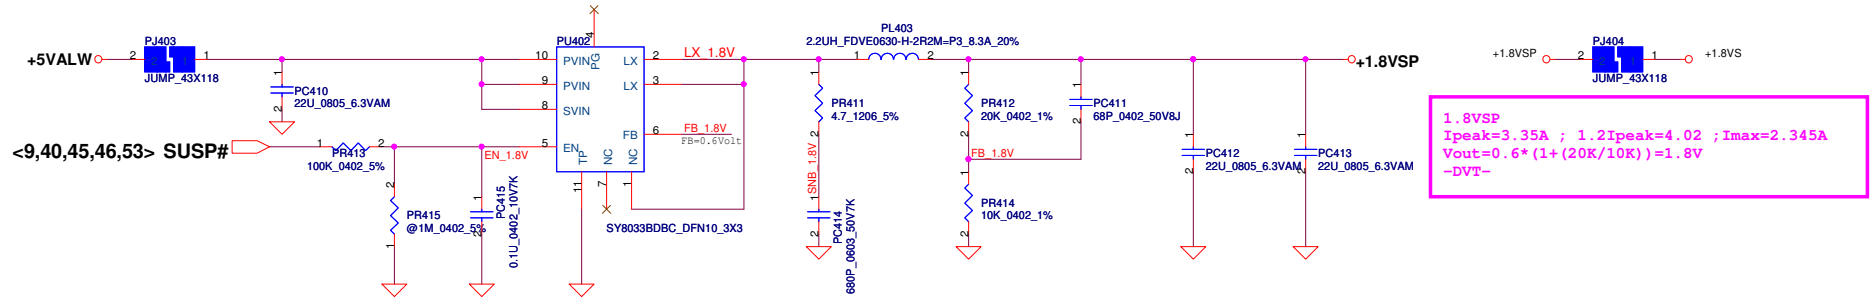

Security Classification	Compal Secret Data		
Issued Date	2010/01/25	Deciphered Date	2010/12/31

Compal Electronics, Inc.			
Title: PWR-+1.5VP/+1.8VSP			
Size: Custom	Document Number: LA-6931P		Rev: 0.1
Date: Wednesday, October 27, 2010	Sheet 51 of 10		

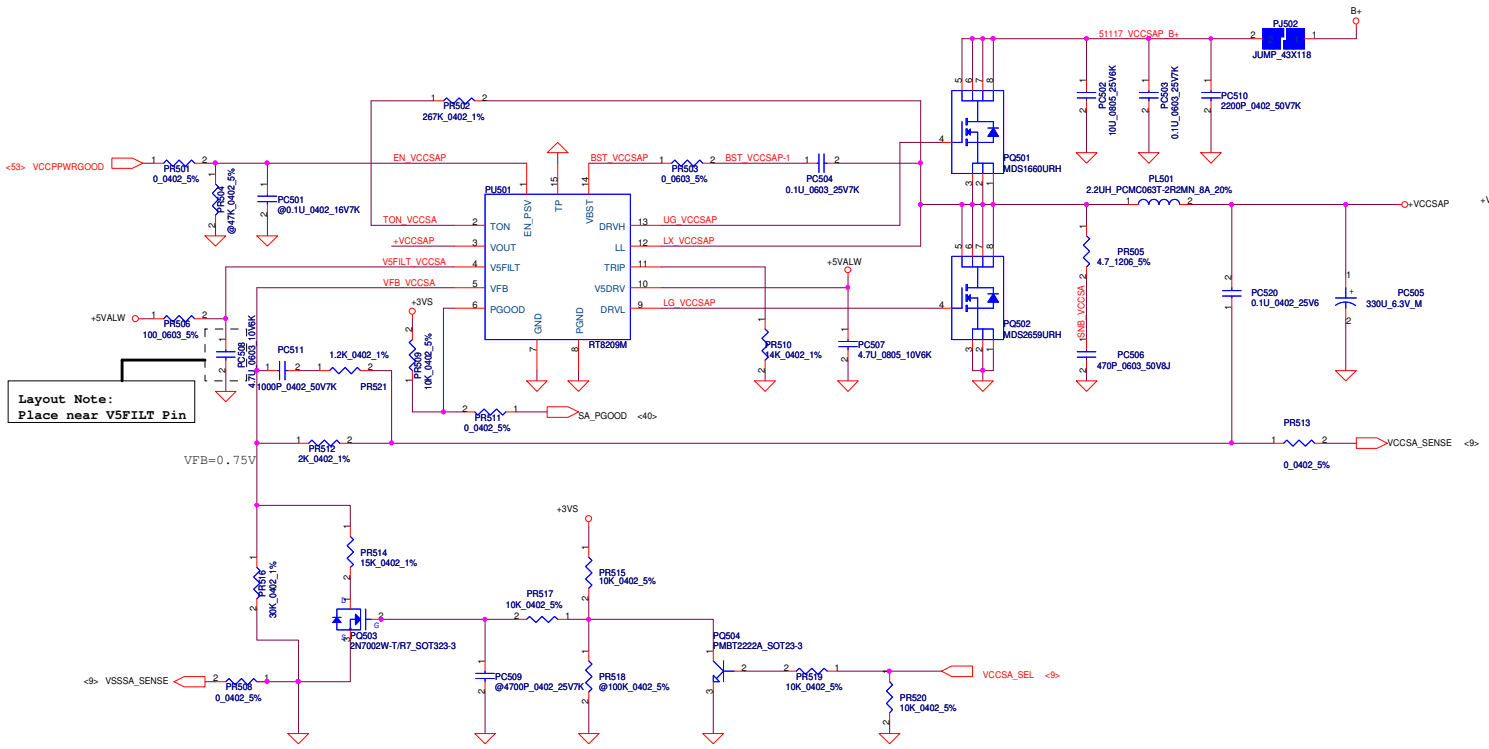

Layout Note:
Place near V5FILT Pin



+VCCSAP
Ipeak=6A , Imax=4.2A, 1.2Ipeak=7.2A
DCR= 9 m(typ)~10 m(max)
Rlimit=12K,Rdson=15~18mohm
Ilimit=10uA
Iocp=Rlimit/Rdson*10^(-5)= 7.61~9.13A

VFB=0.75V
Vo=VFB*(1+PR156/PR150)=1.1V
Ton=19E-12*Ron*(((2/3)*Vo+150mV)/Vin)+50ns=2.4E-7
Freq=213KHz

Cesr=15m ohm
Ipeak=7.2A Imax=6.0A
Delta I=((19.5-1.0)*(1.0/19.5))/(L*Freq)=1.48A
Vtrip=Rtrip*10uA=0.0787V

Iocp=7.28~7.41A

VID[0]	VID[1]	VCCSA Vout	Require on 2011/2012 Required
0	0	0.9 V	Yes/Yes
0	1	0.8 V	Yes/Yes
1	0	0.725V	No/Yes
1	1	0.675V	No/Yes

Note:Use VCCSA_SEL to switch High & Low Level for VID[1]
(ie. VCCSA_SEL) due to the VID[0] is don't care for this setting.

the resister change
from @ to pop component

Add two jumpers on the HW's output cap of the
+VCCSA's PIN(+) and PIN(-) to sense the
feedback voltage for VCCSA_SENSE & VSSSA_SENSE.

Compal Electronics, Inc.

Title: PWR +VCCSAP

Size	Document Number	Rev
C	LA-6931P	0.1

Date: Wednesday, October 27, 2010 Sheet 52 of 10

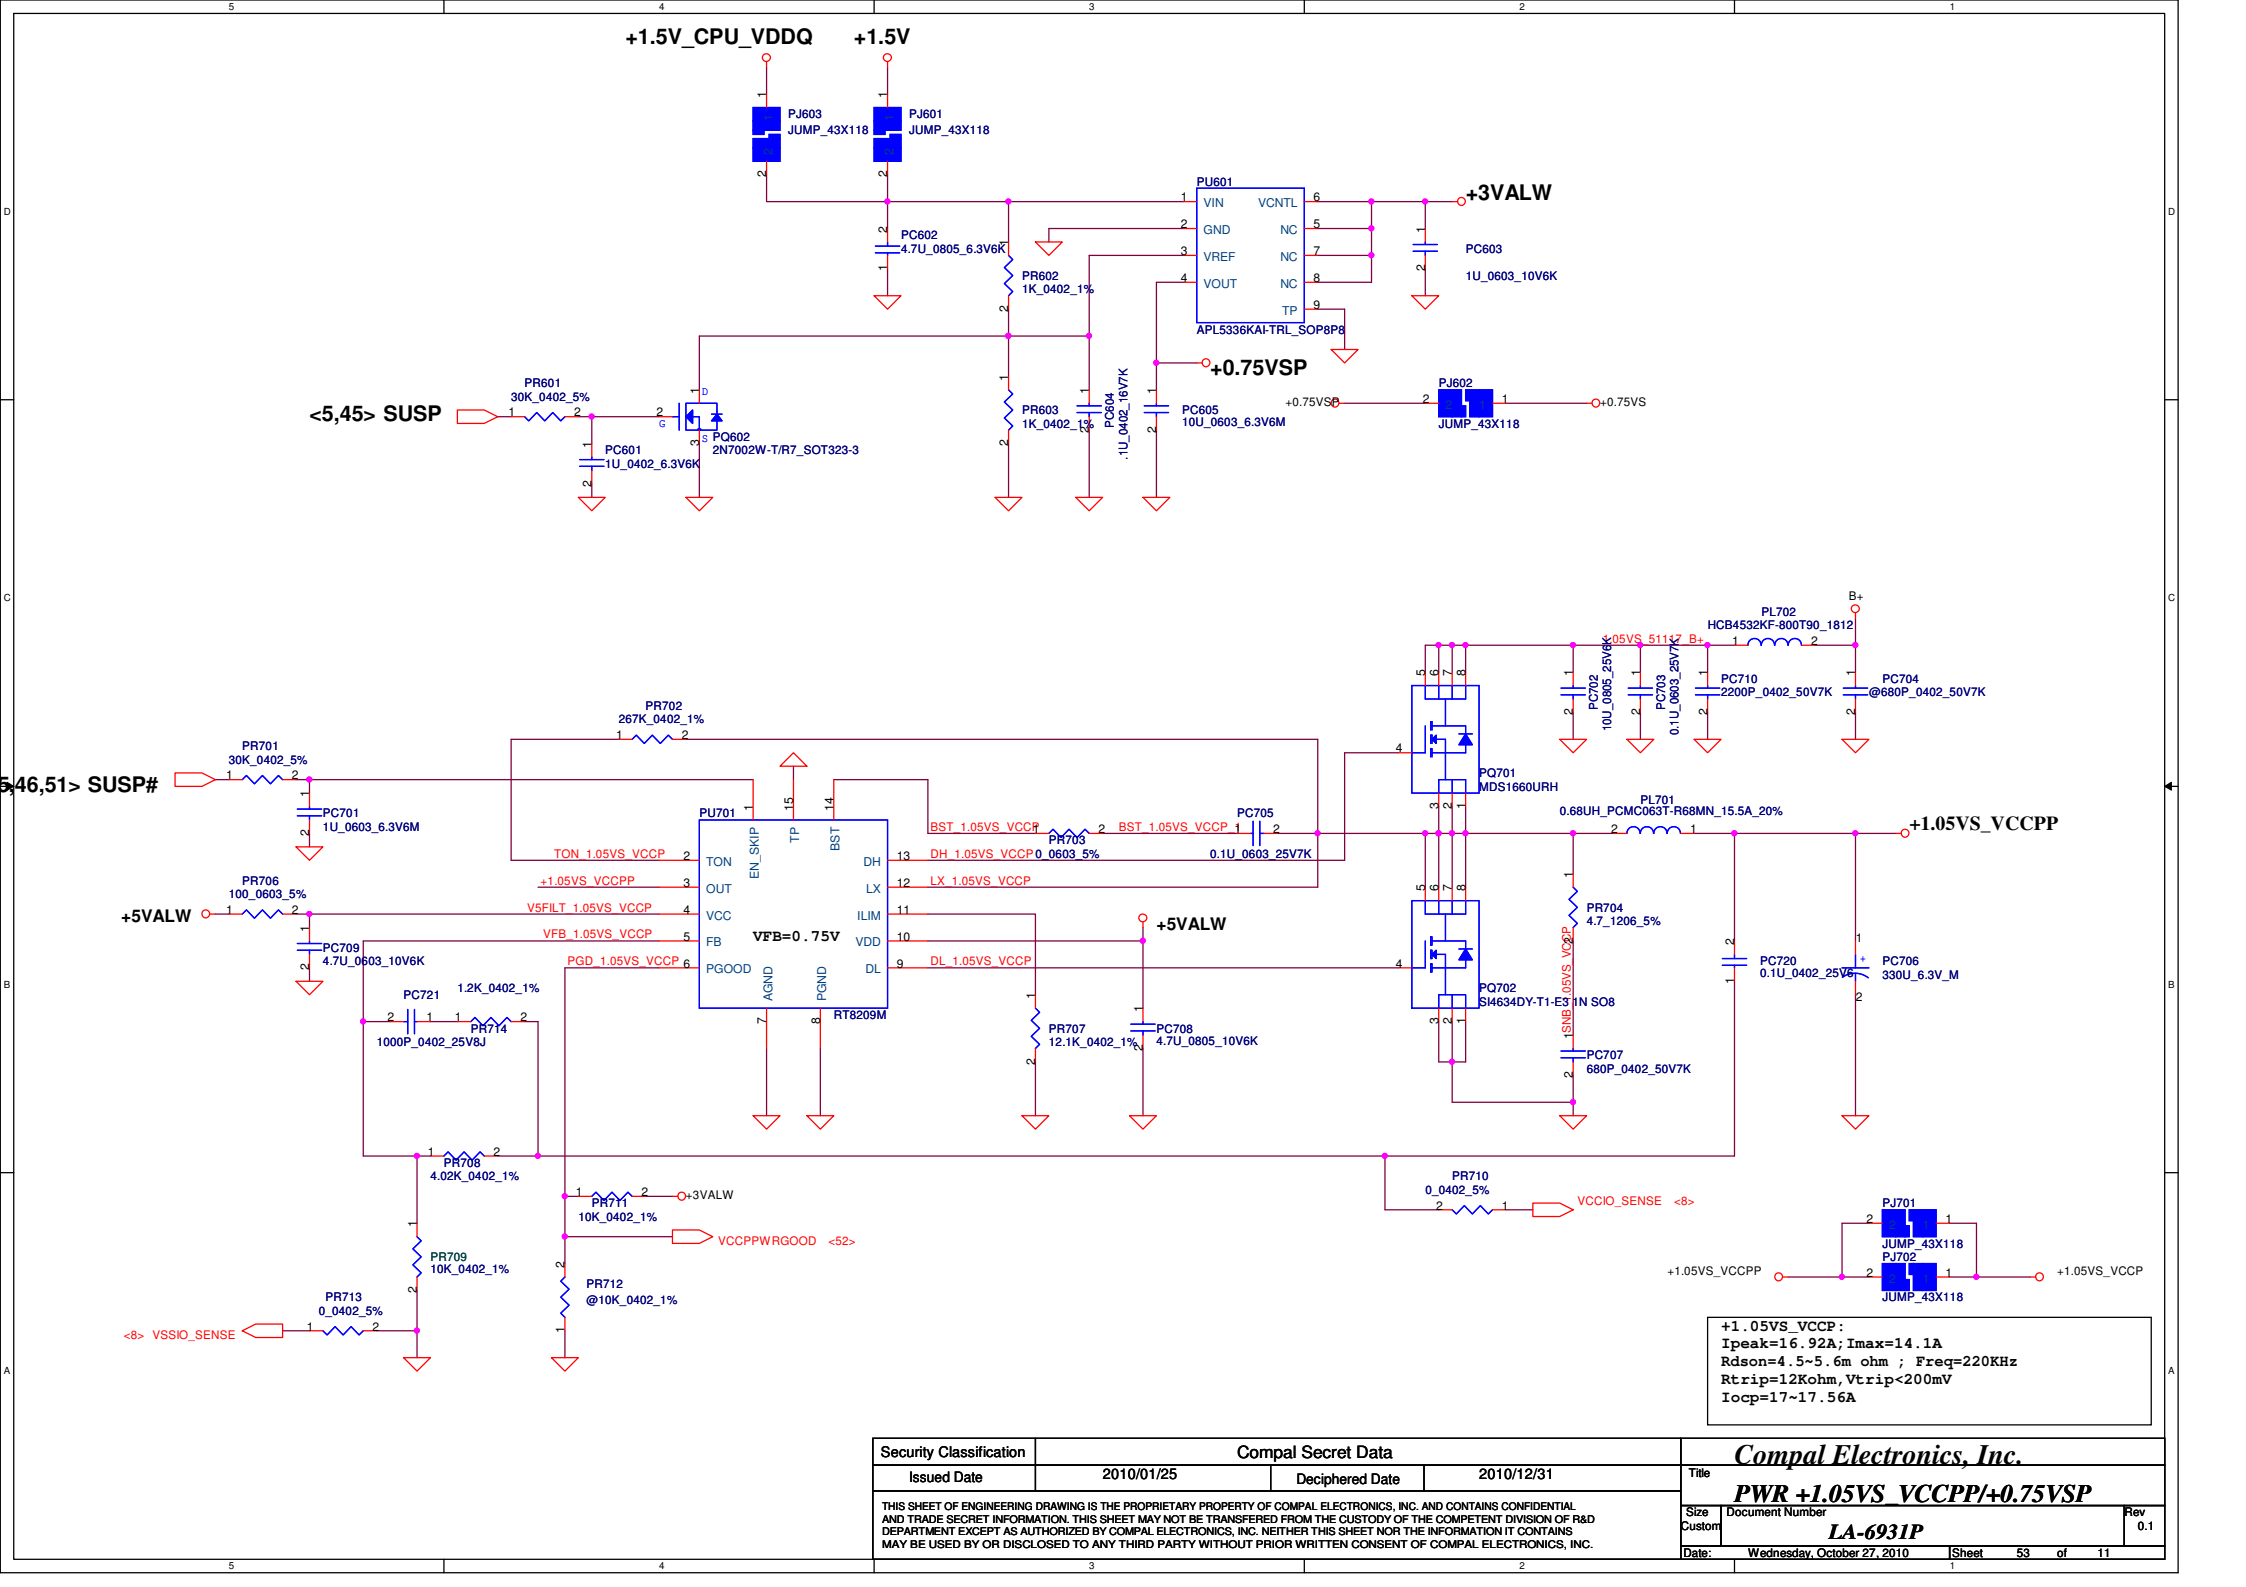

Compal Electronics, Inc.

Title: PWR +1.05VS_VCCPP/+0.75VSP

Size	Document Number	Rev
Custom	LA-6931P	0.1

Date: Wednesday, October 27, 2010 | Sheet 53 of 11

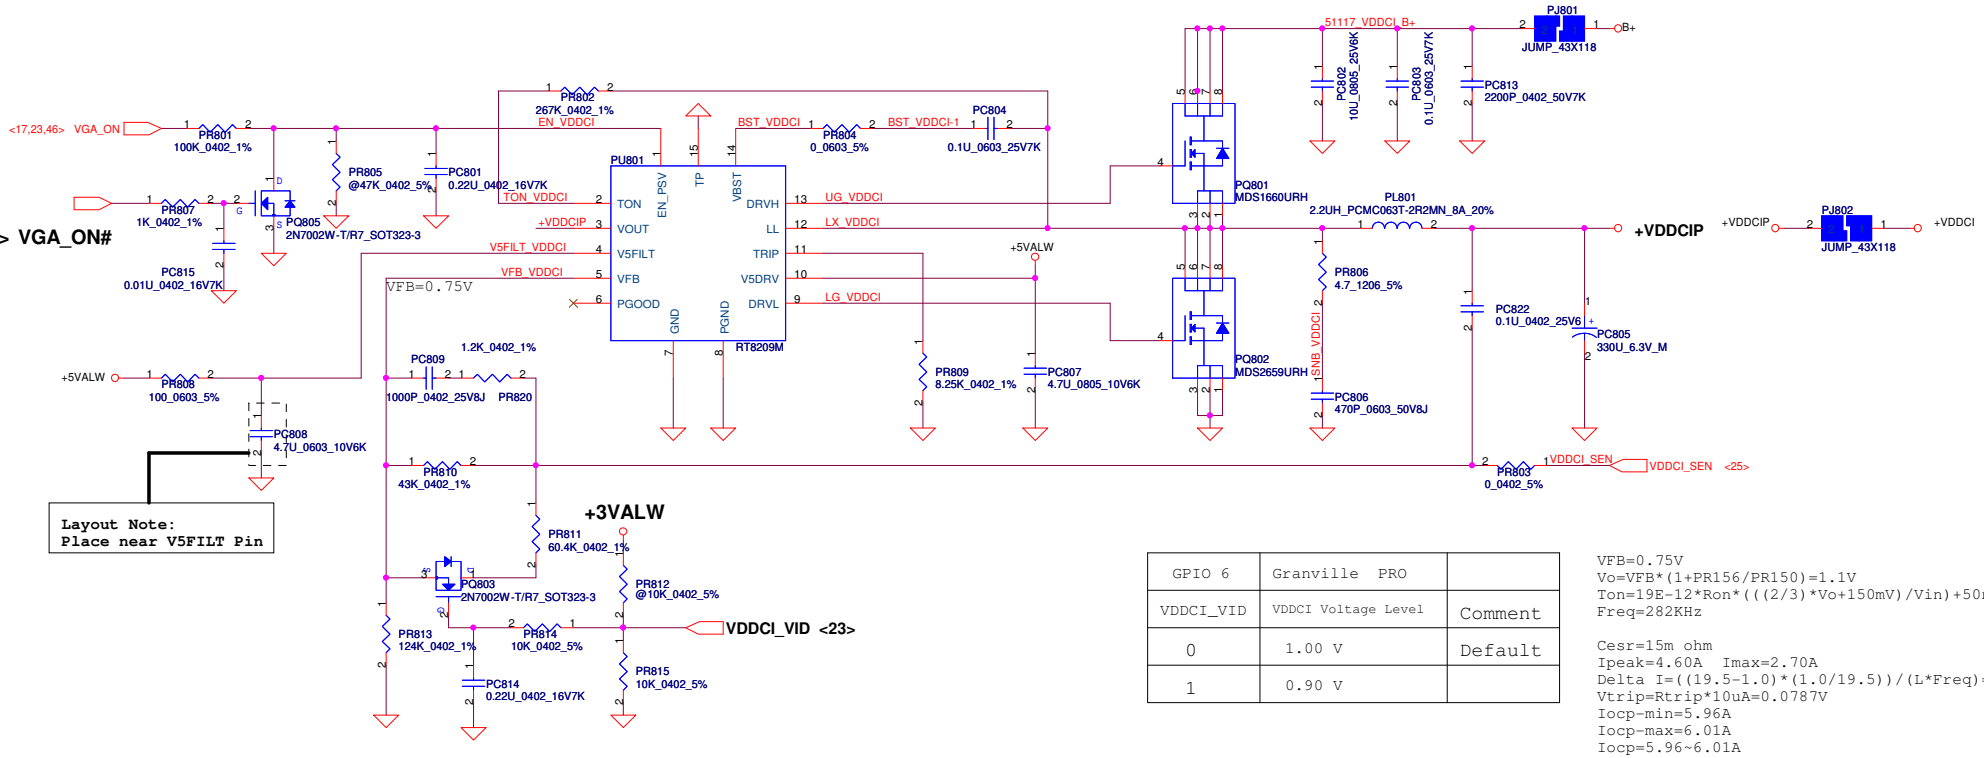

GPIO 6	Granville PRO	
VDDCI_VID	VDDCI Voltage Level	Comment
0	1.00 V	Default
1	0.90 V	

```
VFB=0.75V
Vo=VFB*(1+PR156/PR150)=1.1V
Ton=19E-12*Ron*(((2/3)*Vo+150mV)/Vin)+50ns=2.4E-7
Freq=282KHz

Cesr=15m ohm
Ipeak=4.60A  Imax=2.70A
Delta I=((19.5-1.0)*(1.0/19.5))/(L*Freq)=1.48A
Vtrip=Rtrip*10uA=0.0787V
Iocp-min=5.96A
Iocp-max=6.01A
Iocp=5.96~6.01A
```

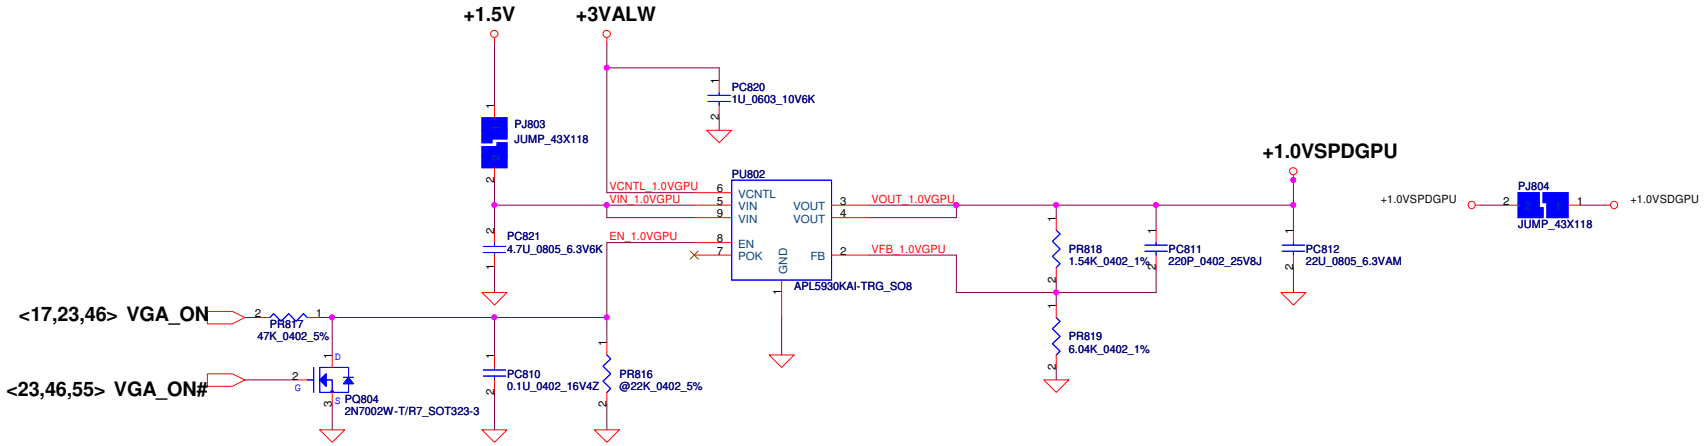

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: **VDDCIP/1.0VSDGPU**

Size	Document Number	Rev
Custom	LA-6931P	0.1

Date: Wednesday, October 27, 2010 | Sheet 54 of 11

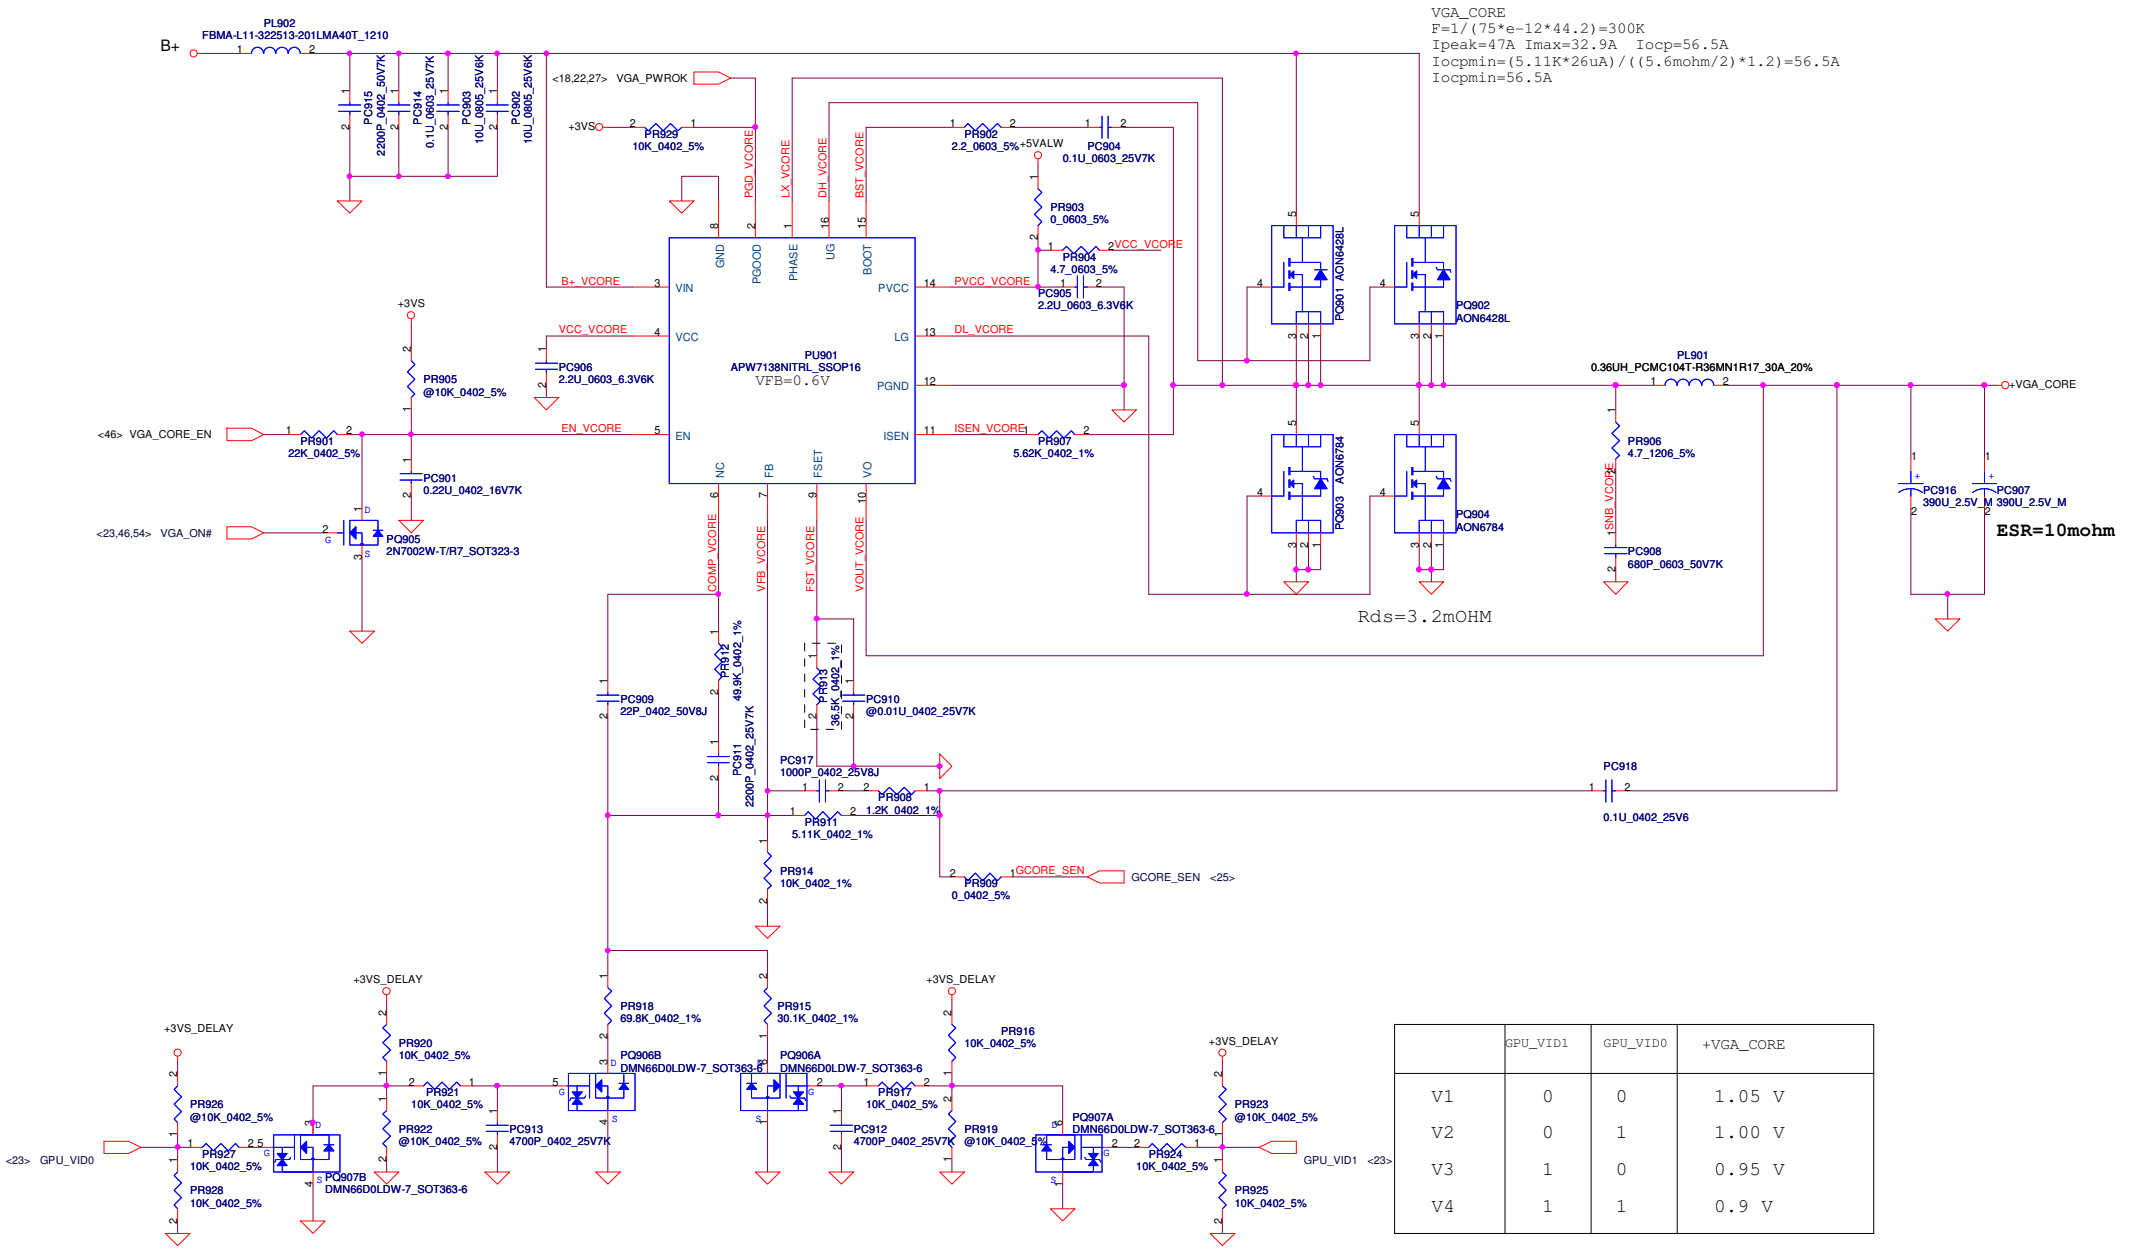

	GPU_VID1	GPU_VID0	+VGA_CORE
V1	0	0	1.05 V
V2	0	1	1.00 V
V3	1	0	0.95 V
V4	1	1	0.9 V

Security Classification	Compal Secret Data		
Issued Date	2007/12/18	Deciphered Date	2010/08/01

Compal Electronics, Inc.

Title: +VGA_COREP

Size: Custom | Document Number: LA-6931P | Rev: 0.2

Date: Wednesday, October 27, 2010 | Sheet 55 of 11

Alert# PU resister need close CPU,
so the PU resister in HW schematic.
but DAT and CLK need close PWM-IC,
so the PU resister in POWER schematic.

Parallel and tune length

*Iccmax in Turbo Mode for SV (35W) is 53A

+CPU_CORE

Icc-max=53A
Rdson=3.6~4.5m ohm
DCR=1.1m ohm
HW output cap:
(1)10U_0805_4V *10
(2)22U_0805_6.3V *15
(3)470U_D2_2V *4(ESR=4.5m ohm)

*OCP setting value=71.5A

+VGFX_COREP

Ipeak=26A , Imax=18.2A , 1.2Ipeak=31.2A
Rdson=3.6~4.5m ohm
DCR=1.1m ohm
HW output cap:
(1)22U_0805_6.3V *12
(2)470U_D2_2V *2(ESR=4.5m ohm)

*OCP setting value=37A

Security Classification	Compal Secret Data		
Issued Date	2010/01/25	Deciphered Date	2010/12/31

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Title: PWR +CPU_CORE/+VGFX_CORE

Size	Document Number	Rev
C	LA-6931P	0.1

Date: Wednesday, October 27, 2010 Sheet 56 of 10

COMPAL CONFIDENTIAL

MODEL NAME: *P5LM0 Power Sequence Block Diagram*
PCB NAME: *LA-6931P*
REVISION: *0.1*
DATE: *2010/08/16*

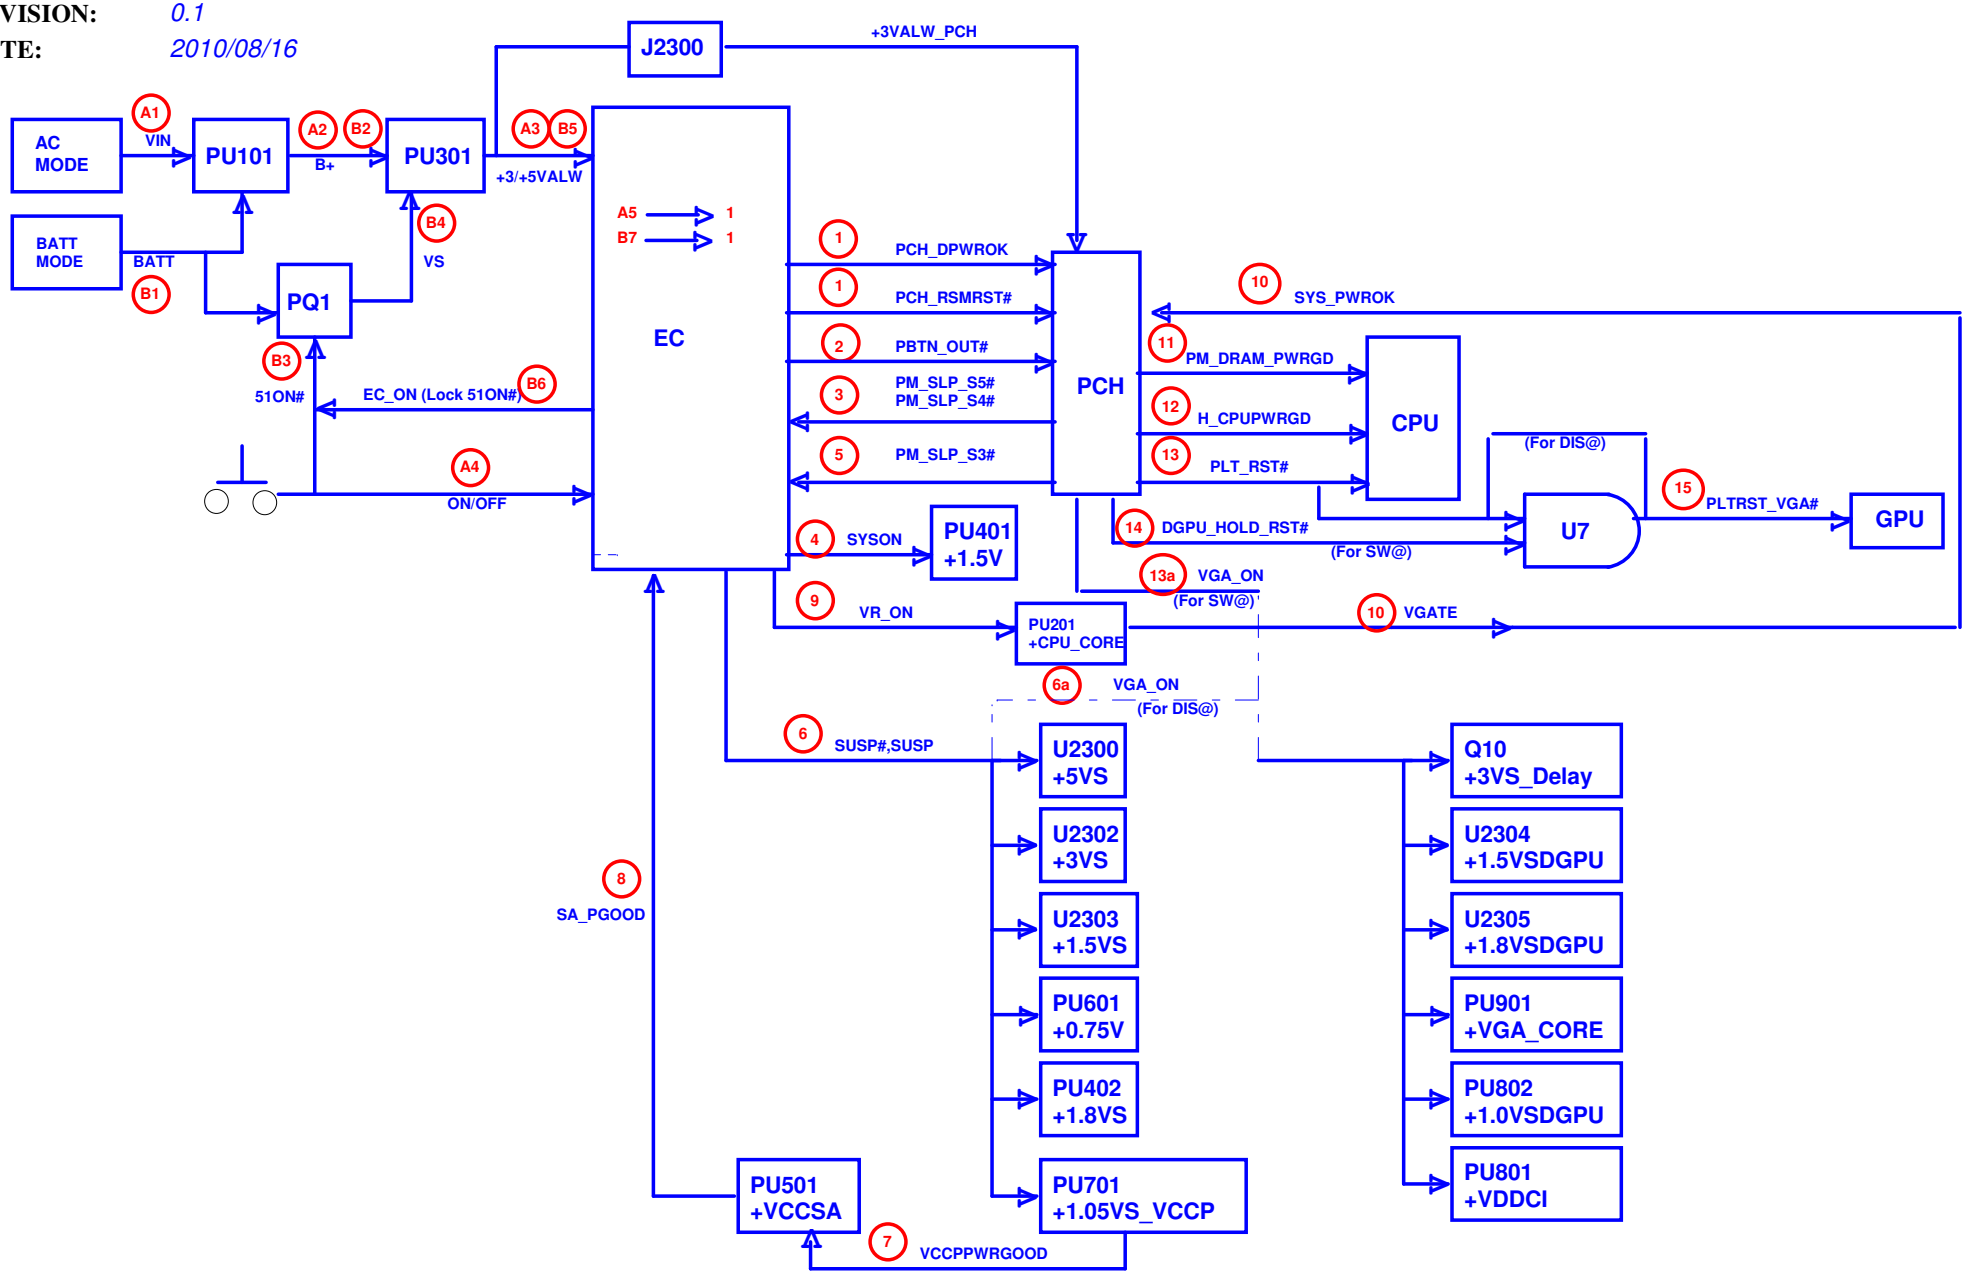

Security Classification	Compal Secret Data		
Issued Date	2009/08/25	Deciphered Date	2010/08/25

Compal Electronics, Inc.

Title: Power Sequence Block Diagram

Size	Document Number	Rev
Custom	LA-6931P	1.0

Date: Wednesday, October 27, 2010 | Sheet 57 of 58

Version Change List (P. I. R. List) for HW Circuit

Item	Page #	Title	Date	Request Owner	Issue Description	Solution Description	Rev.
1	37	USB3.0	8/26	Compal	For USB3.0 wake up function	Instal R2423	0.3
2	30	LVDS	8/26	Compal	For LED panel EDID	Change R2130,R2131,R2185,R2186 from 2.2K to 0 Ohm	0.3
3	35	CIR	8/26	Compal	For CIR can't work	Add R2239,D2201 and pull up to +3VALW on EC side	0.3
4	34	LAN	8/27	Compal	Fine tune LAN_IO rising time	Add C1231 and change R1223 from 47K to 470K Ohm	0.3
5	40	KBC	8/28	Acer	For PWR LED function in low battery mode.	Pull up to +3VALW with R2240 (10K Ohm.)	0.3
6	40	KBC	8/30	Compal	Leakage for +5VS	Delete net "BT_ON" from KBC side	0.3
7	38	Card Reader	8/31	Compal	Card reader function fail	Chang C1318, C1319 to 0.022 uF and 1500 pF	0.3
8	13, 14	PCH	9/06	Compal	Leakage for +3VS	Add R927, D10, D11 to prevent leakage.	0.3
9	18	PCH	9/06	Compal	Leakage for +3V	Add R928, D12 to prevent leakage.	0.3
10	43	Audio	9/09	Compal	SPDIF jack's LED always on.	Add R1148.	0.3
11	33	ODD	9/23	Compal	Don't support ODD zero power	Add R2494, R2495	0.4
12	40	KBC	9/24	Compal	Board ID	Change R2231 from 8.2 K to 33K,	0.4
13	13	PCH	9/29	Compal	HDA_SYNC potential leakage concern.	Add pull down with 1M Ohm (R930) for HDA_SYNC.	0.4
14	30	LVDS	10/1	Compal	Fn+Left/Right hotKey no function, can not adjust brightness	Uninstall R2101 and install R2187	0.4 0.4
15	46	GPU DC-DC	10/2	Compal	Fine tune 1.5VSDGPU timing	Change R2333 from 510K to 470K	0.4
16	46	GPU DC-DC	10/2	Compal	Fine tune 1.8VSDGPU timing	Change R2339 to 33K and C2319 to 2.2u	0.4
17	46	GPU DC-DC	10/2	Compal	For 1.8VSDGPU discharge	Change R2338 from 470 to 220	0.4
18	46	GPU DC-DC	10/2	Compal	For 1.5VSDGPU discharge	Change R2332 from 470 to 220	0.4
19	34	LAN	10/7	Compal	For EMI's request	Add C1232, C1233	0.4
20	14	PCH	10/11	Compal	<RTC Accuracy>Add 90% loading,after 24h about 5s gap,can not meet spec +/-2.5s	Change C853, C854 from 18p to 27p	0.4
21	44	BT	10/20	Compal	For BT discharge	Add R2496, R2497 and Q2407	1.0
22	43	AUDIO	10/20	Compal	Has "po" noise when system enter/resume S3/S4/S5.	Change C1126, C1127 to 0.01u	1.0

Compal Electronics, Inc.		
Title	<Title>	
Size	Document Number LA-6931P	Rev 1.0
Date: Wednesday, October 27, 2010	Sheet 58 of 58	