VCUAA

Metis 10F/10FG

LA-9161P REV 1.0 Schematic

Intel Processor (Ivy Bridge) / PCH(Panther Point)
2012-08-07 Rev 1.0

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date	2015/04/19
Title	*Cover Page*		
Size: Custom	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 1 of 53		

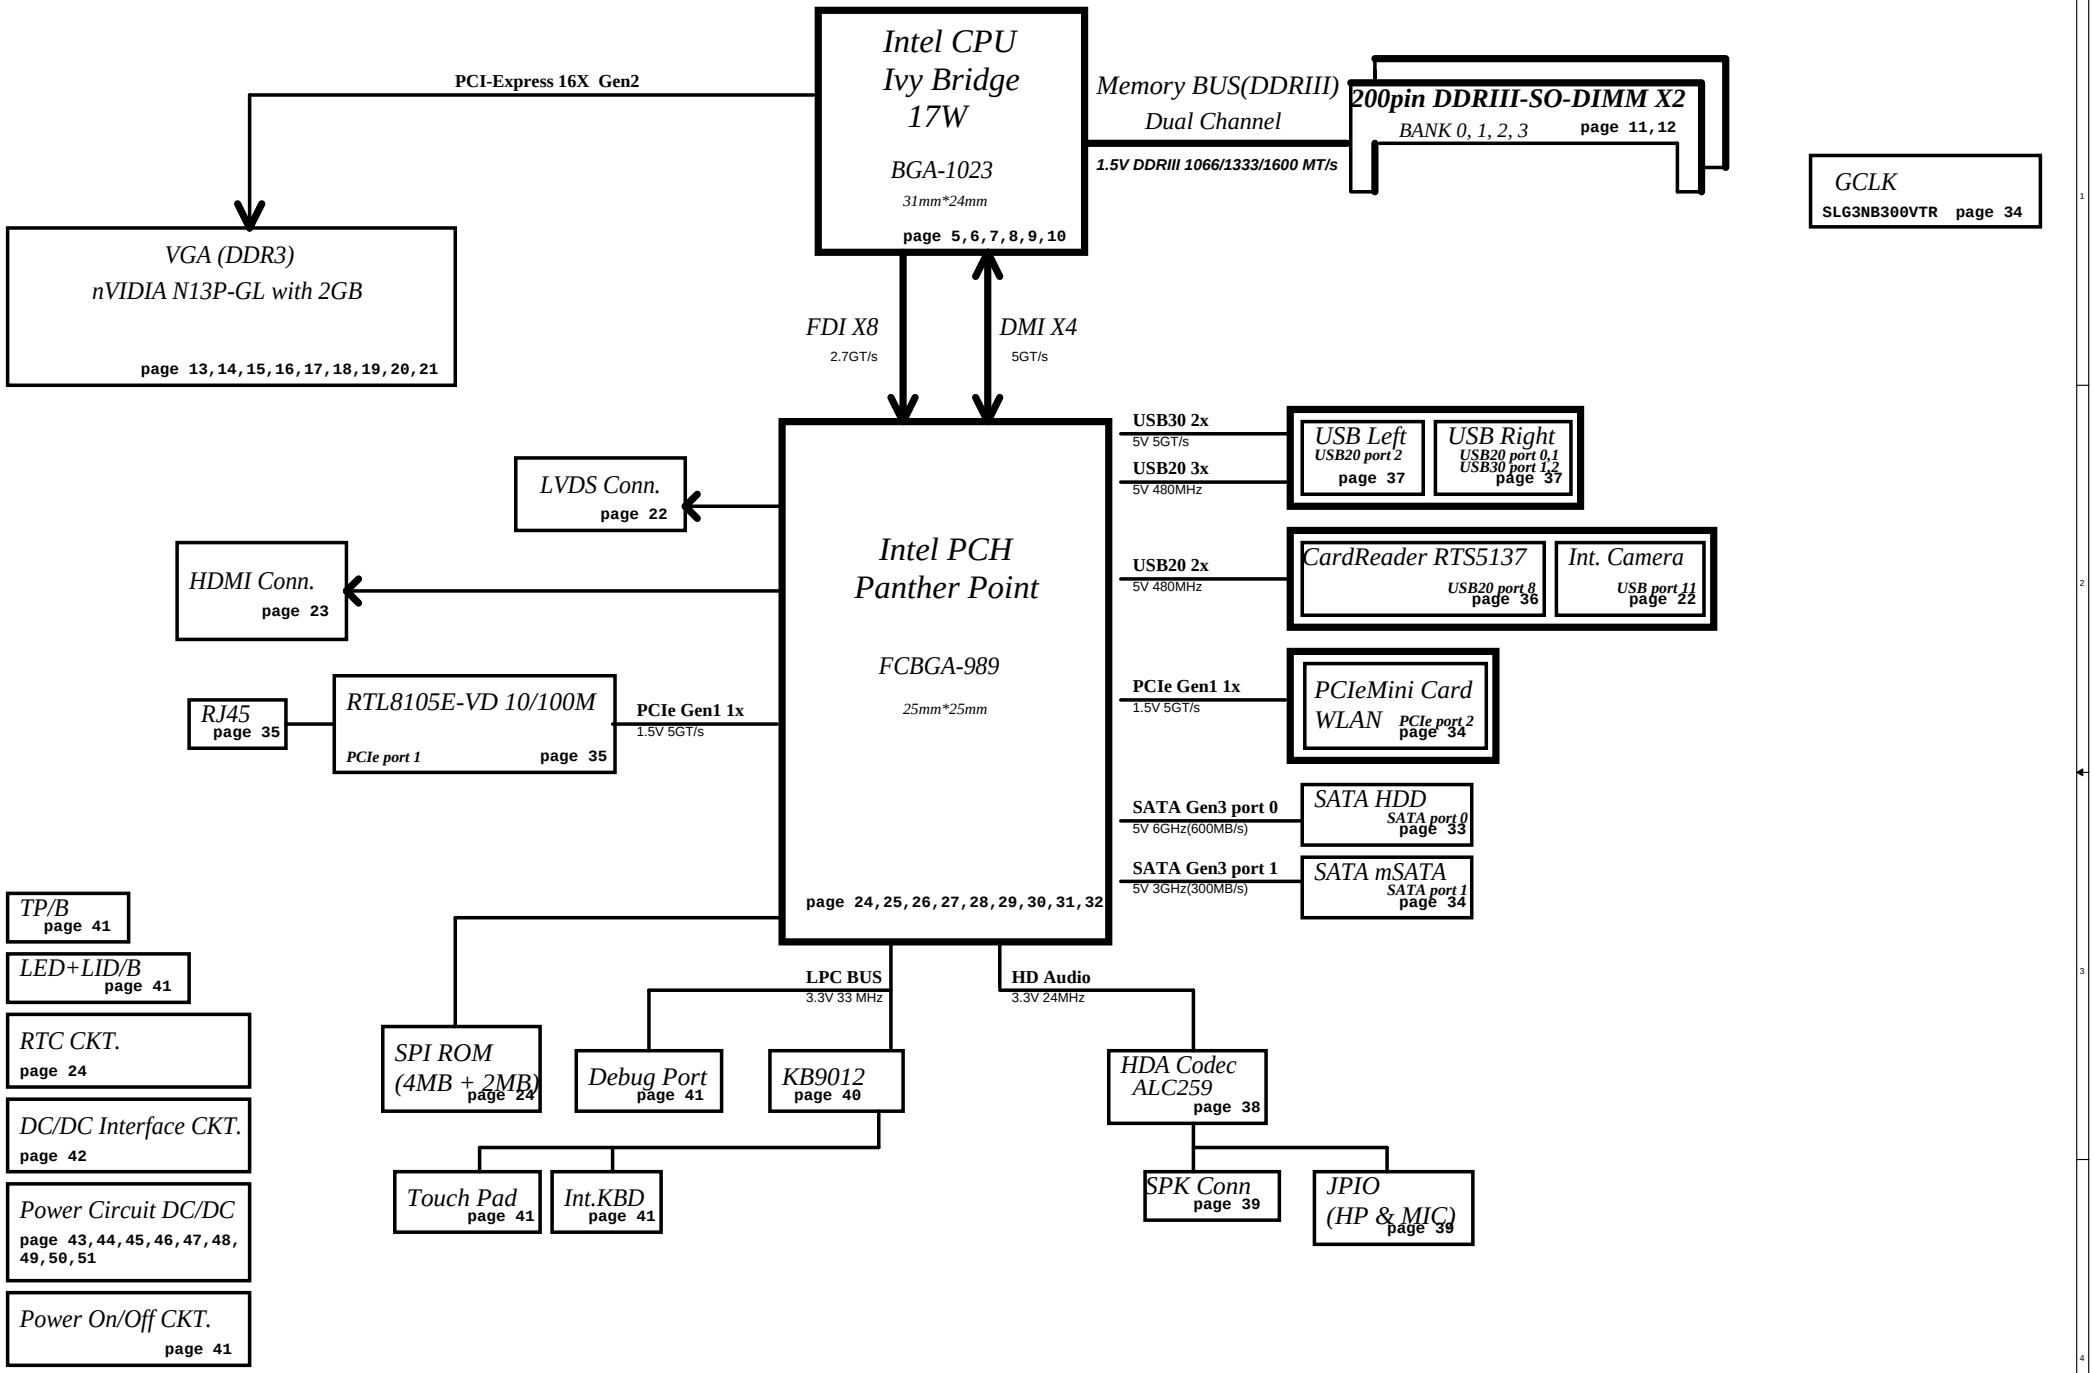

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: **Block Diagram**

Size	Document Number: VCUAA	Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 2 of 53	

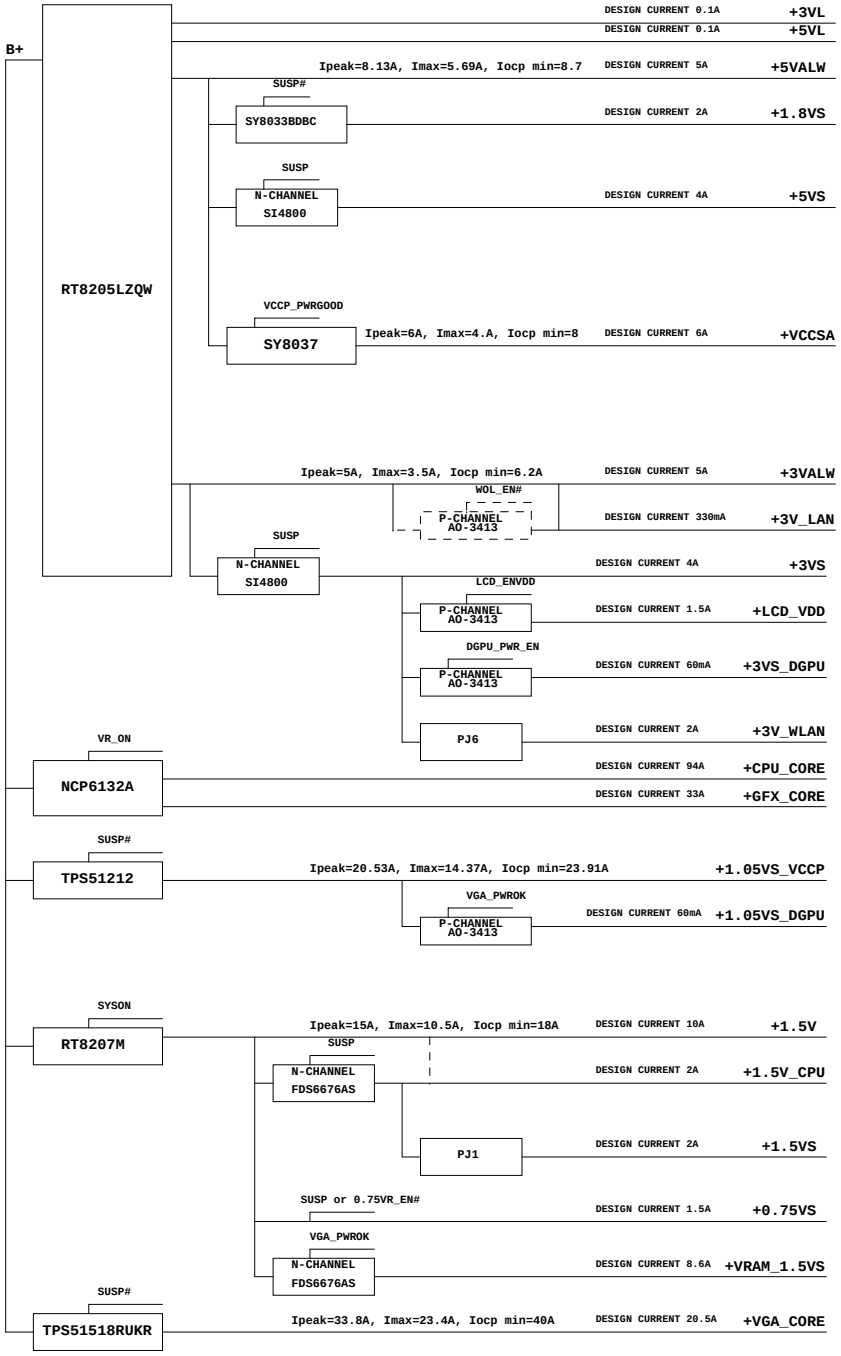

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.			
Title: Power Tree			
Size: C	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 3 of 53		

Voltage Rails

(O MEANS ON X MEANS OFF)

power plane / State	+RTCVCC	B+	+5VL +3VL	+5VALW +3VALW +VSB	+1.5V	+5VS +3VS +1.8VS +1.5VS +1.05VS +0.75VS +CPU_CORE +VGA_CORE +GFX_CORE +VTT +VRAM_1.5VS +3VS_DGPU +1.05VS_DGPU
S0	0	0	0	0	0	0
S1	0	0	0	0	0	0
S3	0	0	0	0	0	X
S5 S4/AC	0	0	0	0	X	X
S5 S4/ Battery only	0	0	0	X	X	X
S5 S4/AC & Battery don't exist	0	X	X	X	X	X

PCH SM Bus Address

Power	Device	HEX	Address
+3VS	DDR SO-DIMM 0	A0 H	1010 0000 b
+3VS	DDR SO-DIMM 1	A4 H	1010 0100 b

EC SM Bus1 Address

Power	Device	HEX	Address
+3VL	Smart Battery	16 H	0001 0110 b
+3VL	Smart Charger	12 H	0001 0010 b

Power	Device	HEX	Address

EC SM Bus2 Address

Power	Device	HEX	Address
+3VS	PCH	96 H	1001 0110 b
+3VS	NVIDIA GPU	9E H	1001 1010 b

Platform	SKU	CPU	PCH	VGA
Chief River		Ivy Bridge i3 (CPUI3@) Ivy Bridge i5 (CPUI5@)	HM77C1(HM77@) HM77C1_R1(HM77R1@) HM77C1_R3(HM77R3@)	nVIDIA N13P-GL (N13PGL@)

BTO Option Table

Function	SKU	MIC	LAN			
description						
explain						
BTO						

Function							
description							
explain							
BTO							

Function							
description							
explain							
BTO							

Function			
description			
explain			
BTO			

STATE / SIGNAL	SLP_S3#	SLP_S4#	SLP_S5#
Full ON	HIGH	HIGH	HIGH
S1(Power On Suspend)	HIGH	HIGH	HIGH
S3 (Suspend to RAM)	LOW	HIGH	HIGH
S4 (Suspend to Disk)	LOW	LOW	HIGH
S5 (Soft OFF)	LOW	LOW	LOW
G3	LOW	LOW	LOW

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date 2015/04/19	Title: Notes List
Size: Custom	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 4 of 53		

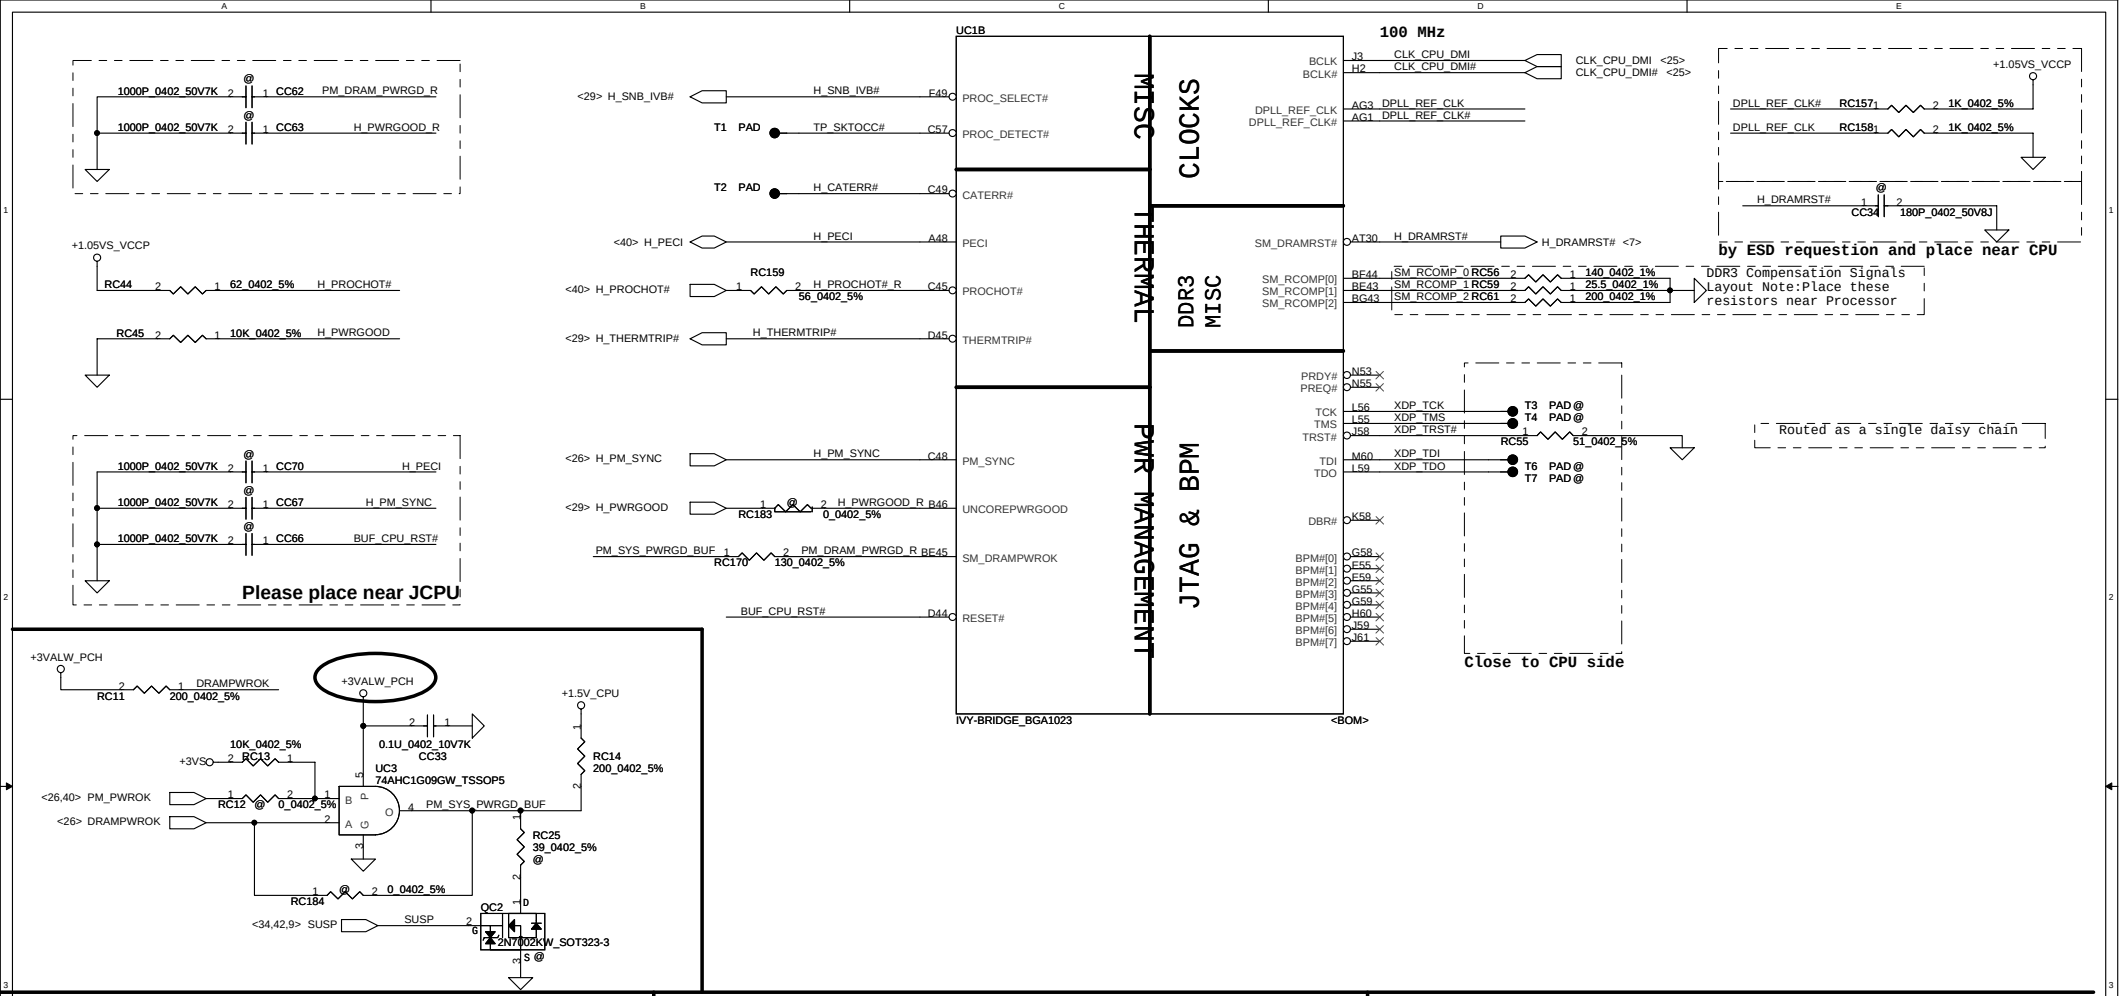

Buffered Rest to CPU

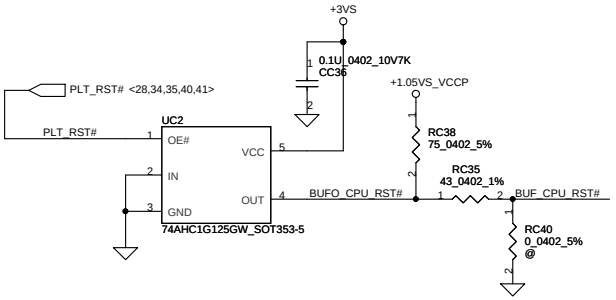

XDP Connector

FAN Control Circuit

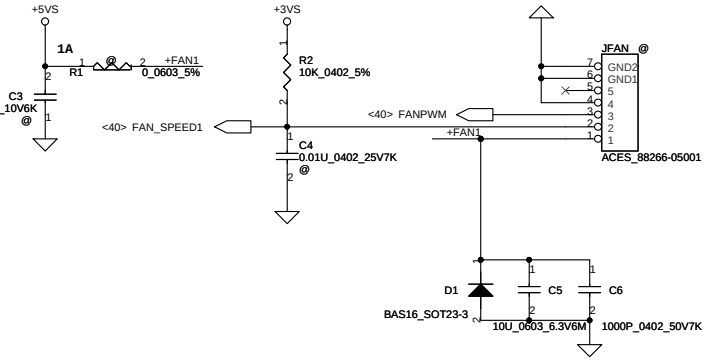

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.	
Title	Ivy Bridge_JTAG/XDP/FAN
Size: Custom	Document Number: VCUAA
Rev	1.0
Date: Tuesday, October 16, 2012	Sheet 5 of 53

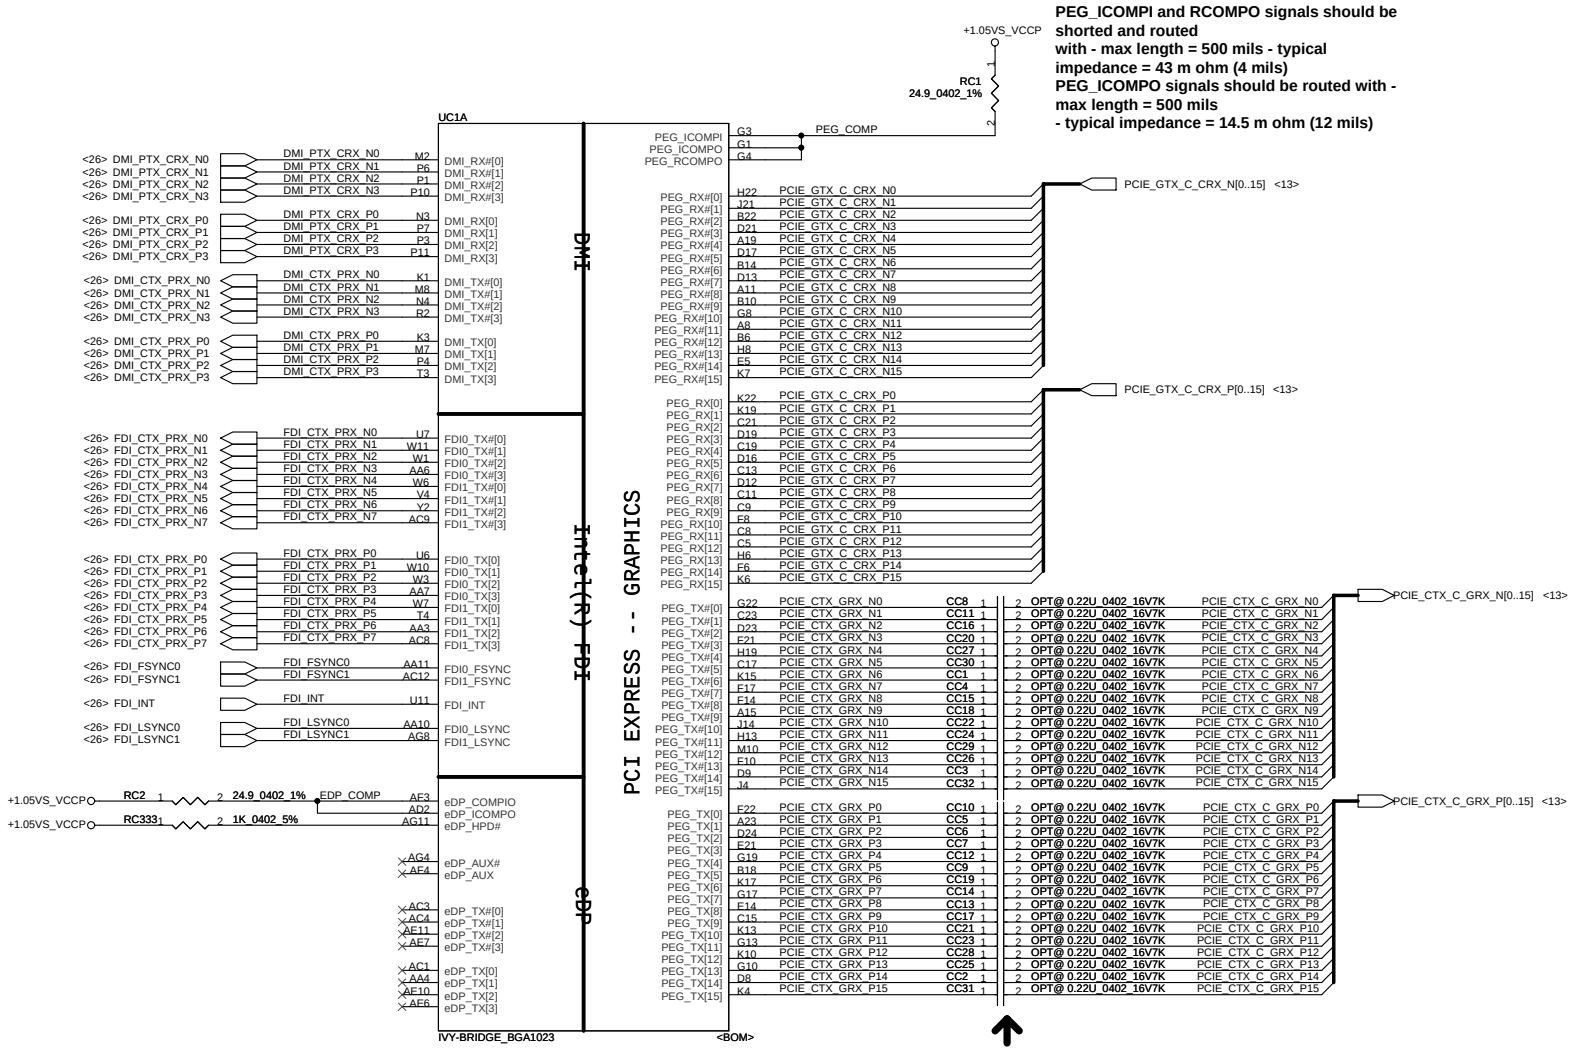

	PEG	DG suggest AC cap
IVY Bridge	Gen1/Gen2	75 nF~265 nF
	Gen3	180 nF~265 nF
SANDY Bridge	Gen1/Gen2	180 nF~265 nF
NV N13X	Gen1/2/3	Suggest 220 nF

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date 2015/04/19	Title: Ivy Bridge_DMI/PEG/FDI
Size: Custom	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 6 of 53		

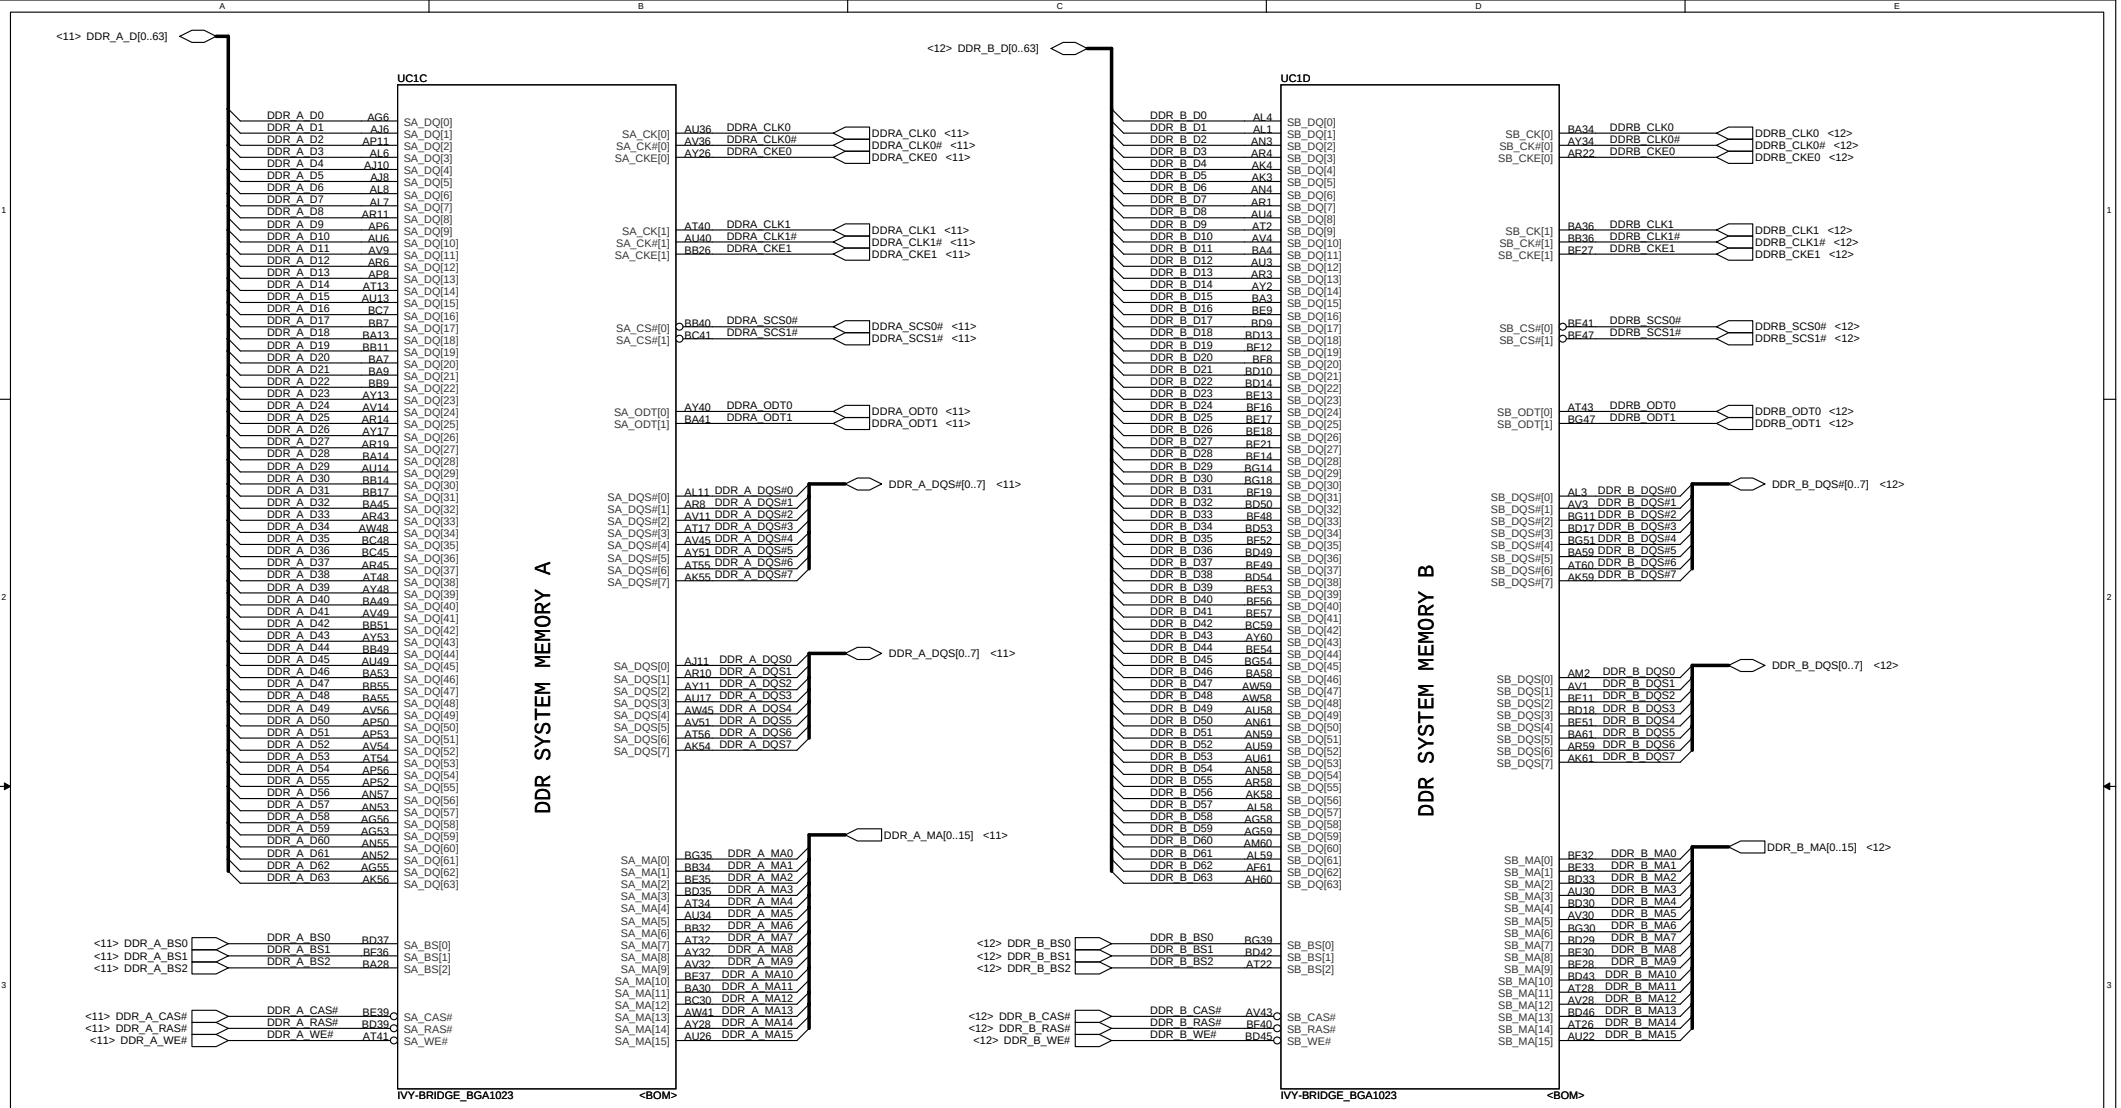

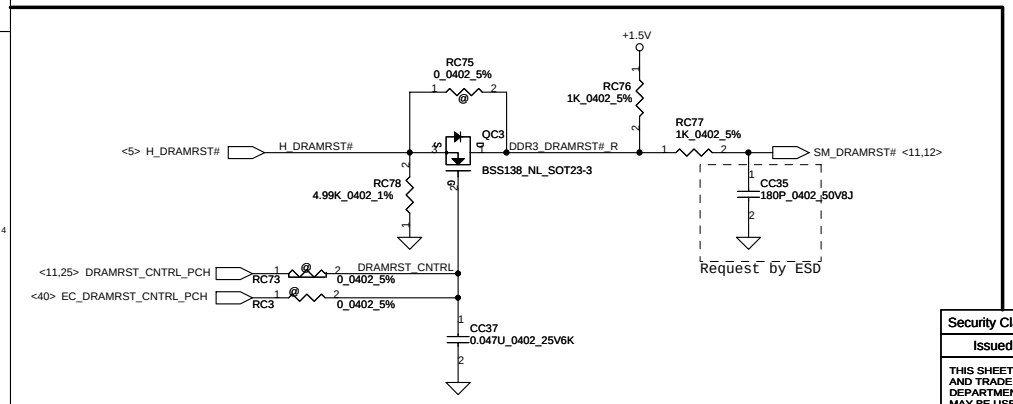

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: ***Ivy Bridge_DDR3***

Size	Document Number	Rev
Custom	VCUAA	1.0

Date: Tuesday, October 16, 2012 | Sheet 7 of 53

POWER

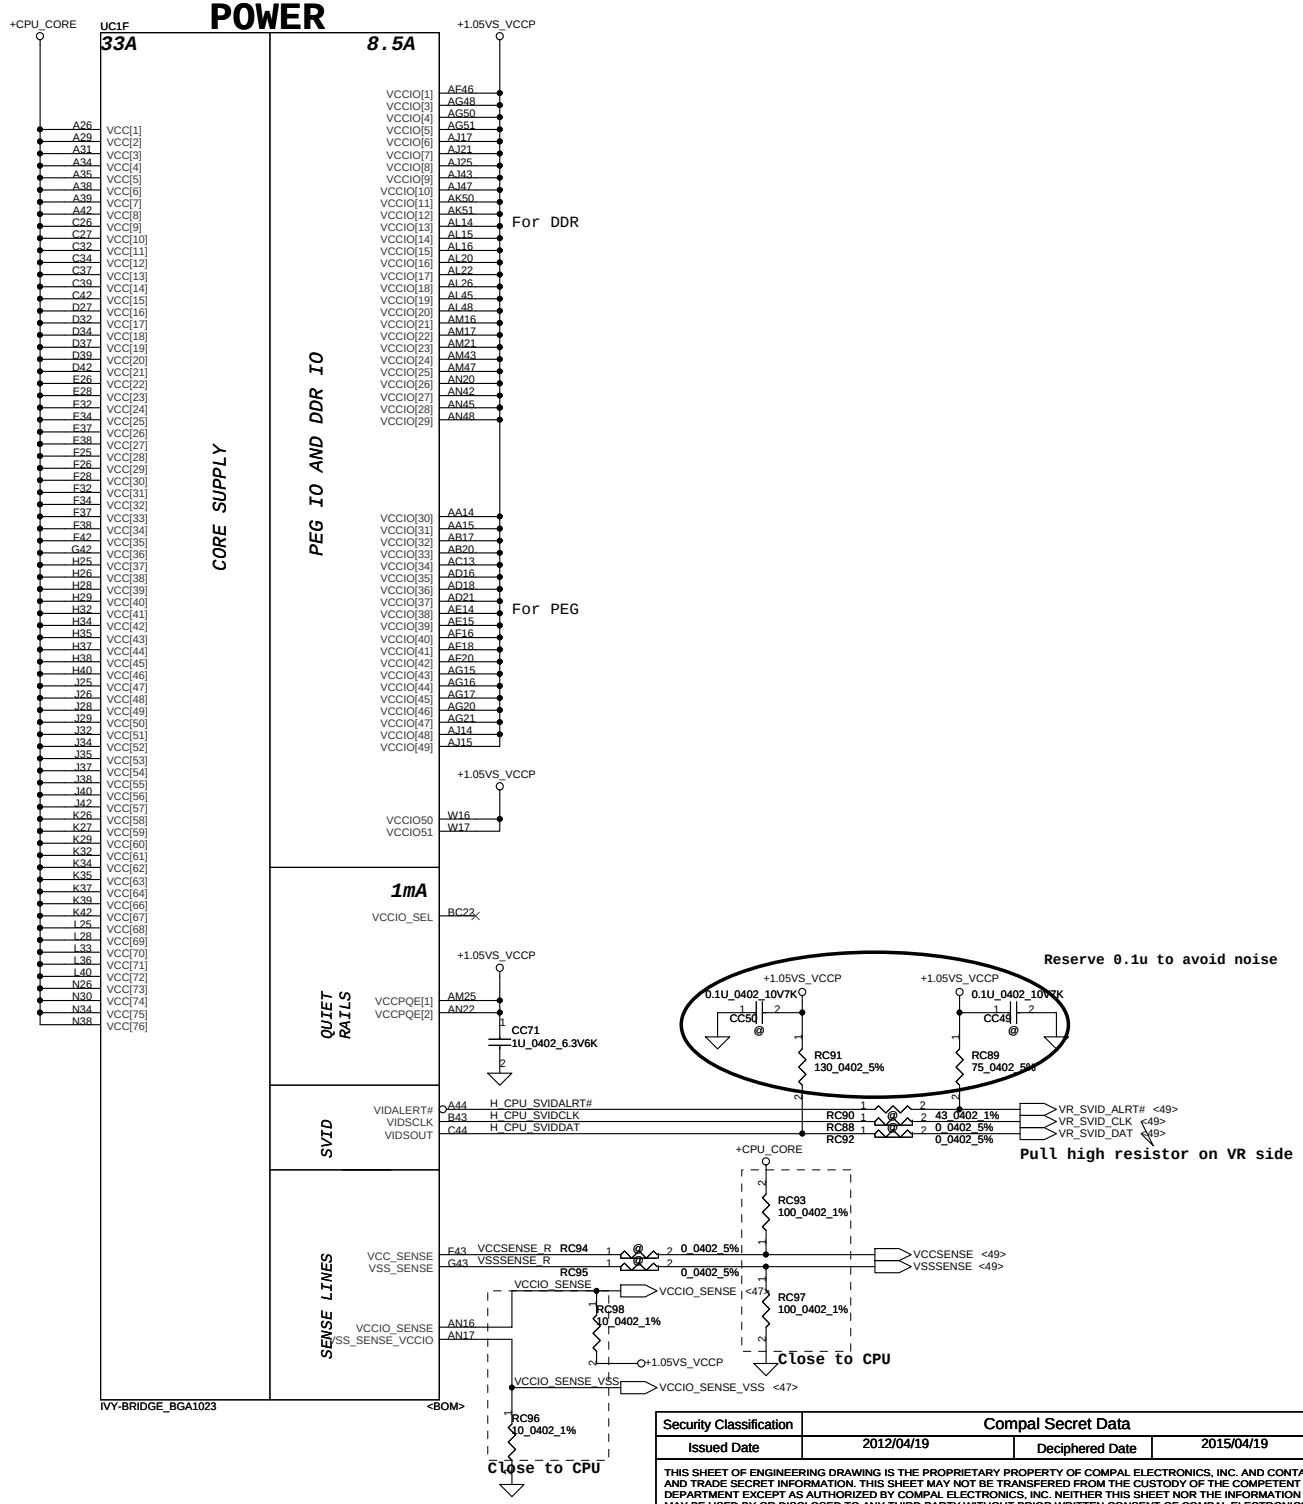

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.			
Title: Ivy Bridge_POWER-1			
Size: Custom	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 8 of 53		

POWER

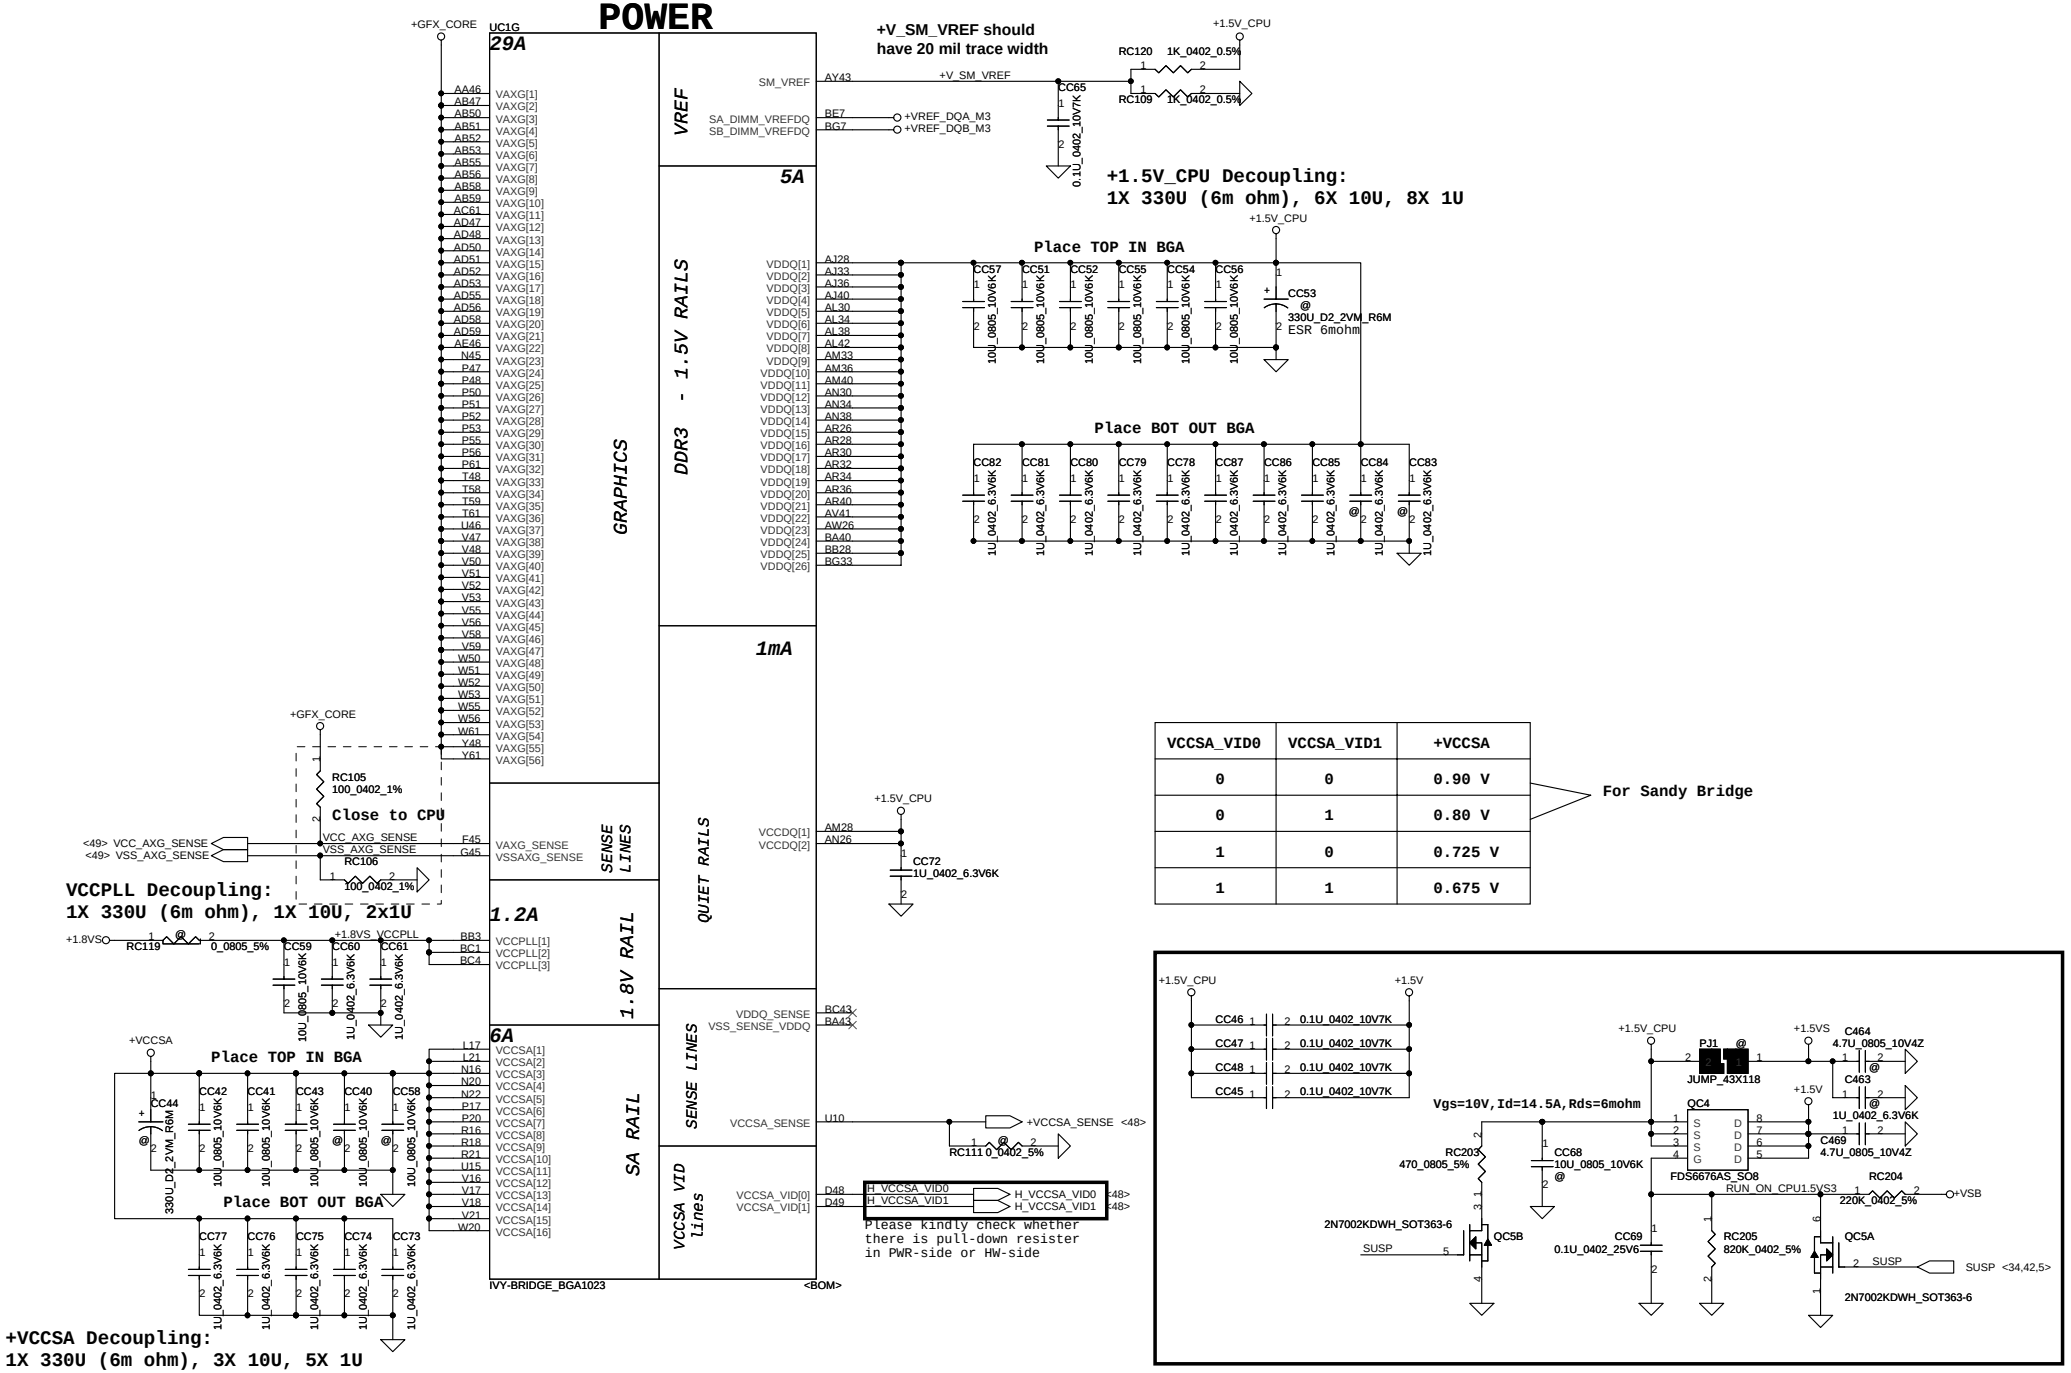

VCCSA_VID0	VCCSA_VID1	+VCCSA
0	0	0.90 V
0	1	0.80 V
1	0	0.725 V
1	1	0.675 V

For Sandy Bridge

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.	
Title	Ivy Bridge_POWER-2
Size: Custom	Document Number: VCUAA
Rev	1.0
Date: Tuesday, October 16, 2012	Sheet 9 of 53

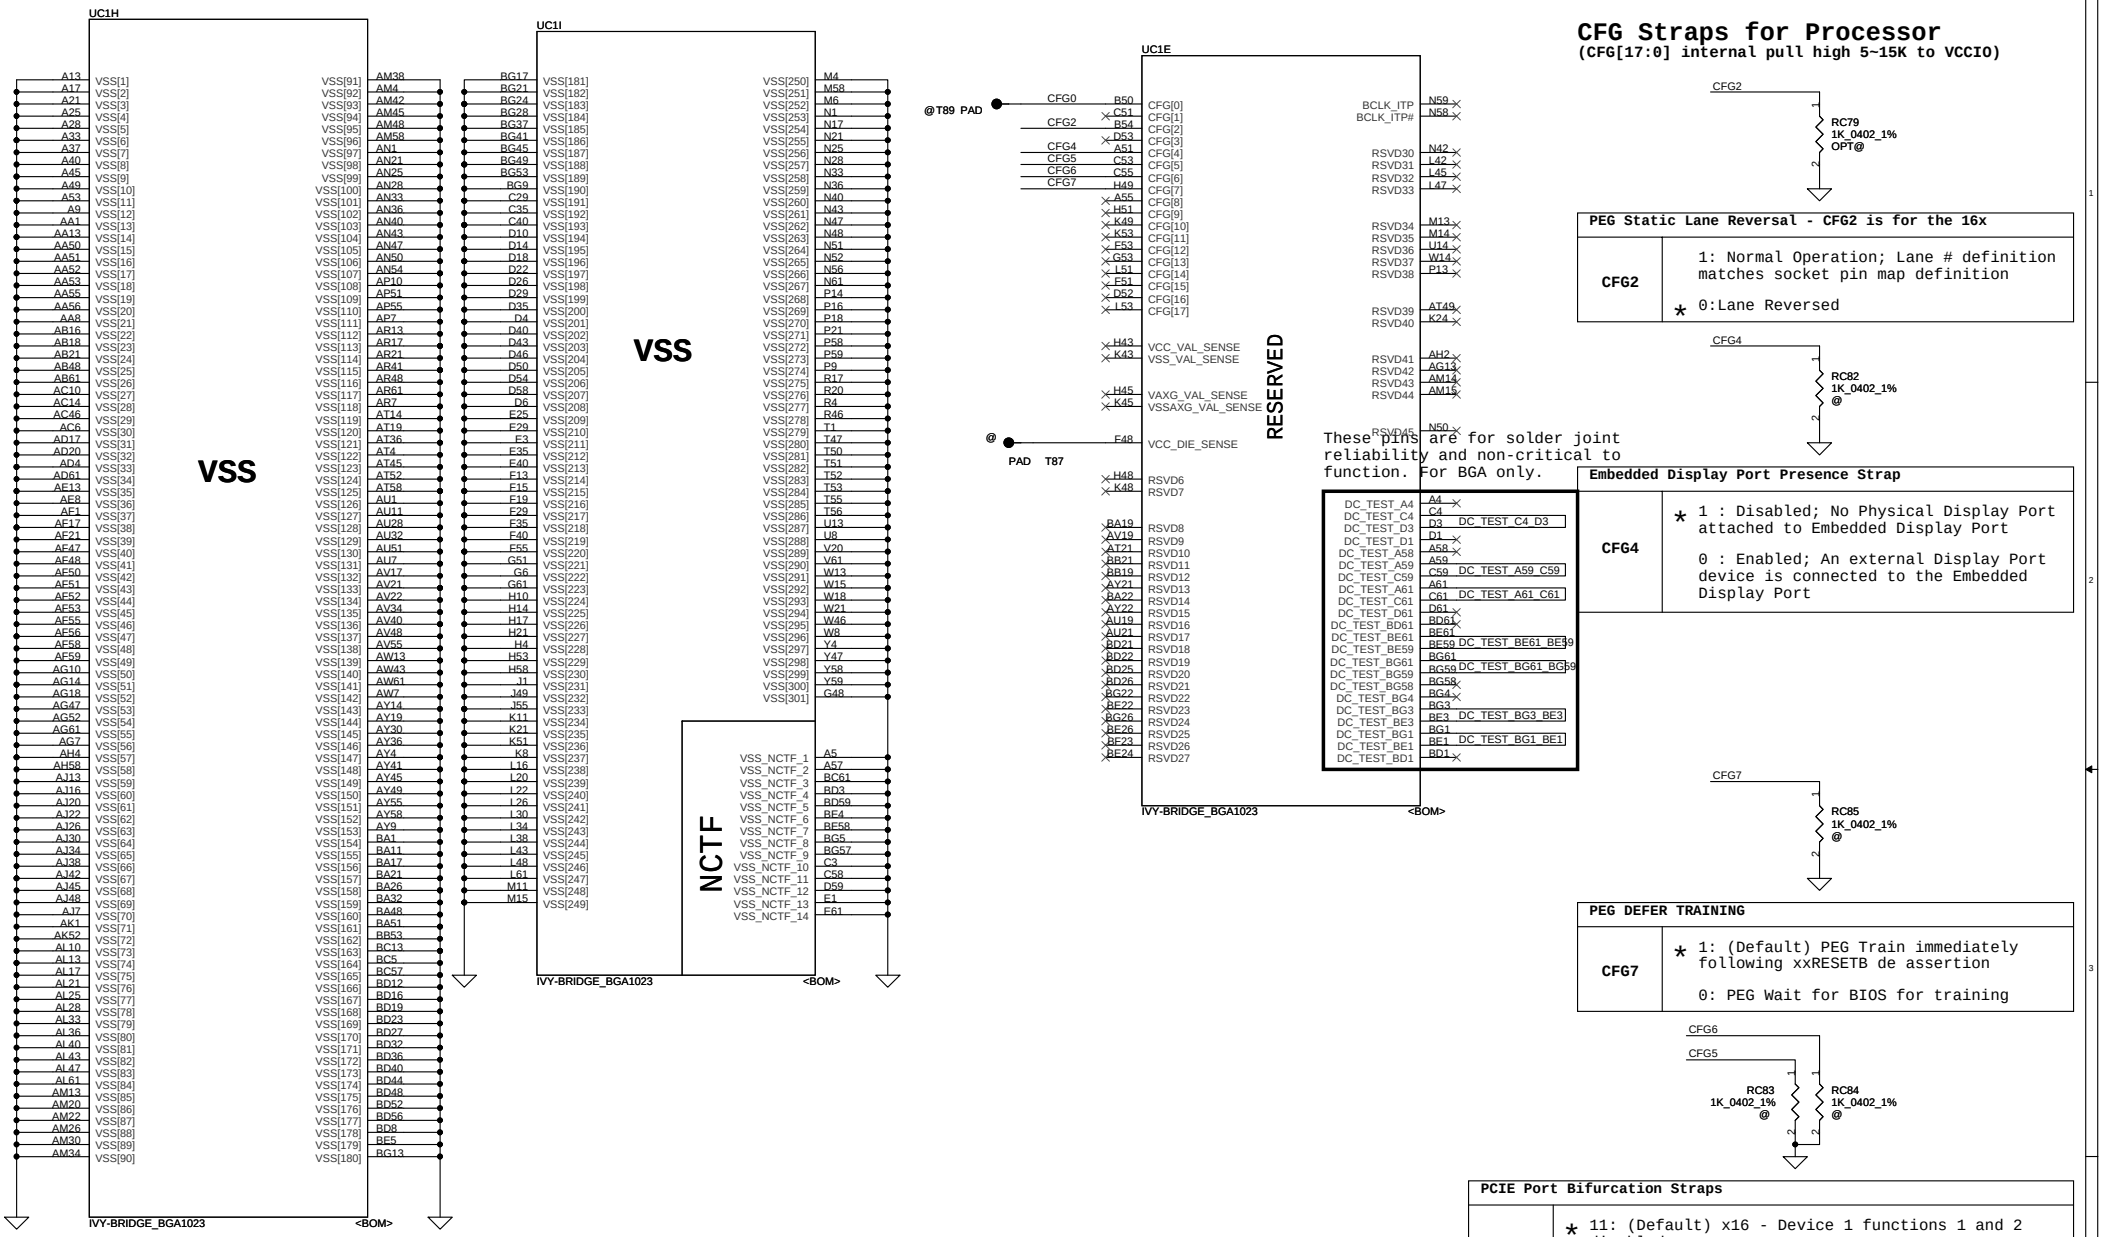

CFG Straps for Processor

(CFG[17:0] internal pull high 5~15K to VCCIO)

CFG2 — RC79 1K_0402_1% OPT@

PEG Static Lane Reversal - CFG2 is for the 16x	
CFG2	1: Normal Operation; Lane # definition matches socket pin map definition * 0:Lane Reversed

CFG4 — RC82 1K_0402_1% @

Embedded Display Port Presence Strap	
CFG4	* 1 : Disabled; No Physical Display Port attached to Embedded Display Port 0 : Enabled; An external Display Port device is connected to the Embedded Display Port

CFG7 — RC85 1K_0402_1% @

PEG DEFER TRAINING	
CFG7	* 1: (Default) PEG Train immediately following xxRESETB de assertion 0: PEG Wait for BIOS for training

CFG6 — RC83 1K_0402_1% @

CFG5 — RC84 1K_0402_1% @

PCIE Port Bifurcation Straps	
CFG[6:5]	* 11: (Default) x16 - Device 1 functions 1 and 2 disabled 10: x8, x8 - Device 1 function 1 enabled; function 2 disabled 01: Reserved - (Device 1 function 1 disabled; function 2 enabled) 00: x8,x4,x4 - Device 1 functions 1 and 2 enabled

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date 2015/04/19	Title: Ivy Bridge_GND/RSVD/CFG
Size: Custom	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 10 of 53		

DDR3 SO-DIMM A
Reverse Type

DDR_A_DQS[0..7] <7>
DDR_A_DQS#[0..7] <7>
DDR_A_D[0..63] <7>
DDR_A_MA[0..15] <7>

Intel DDR Vref M3

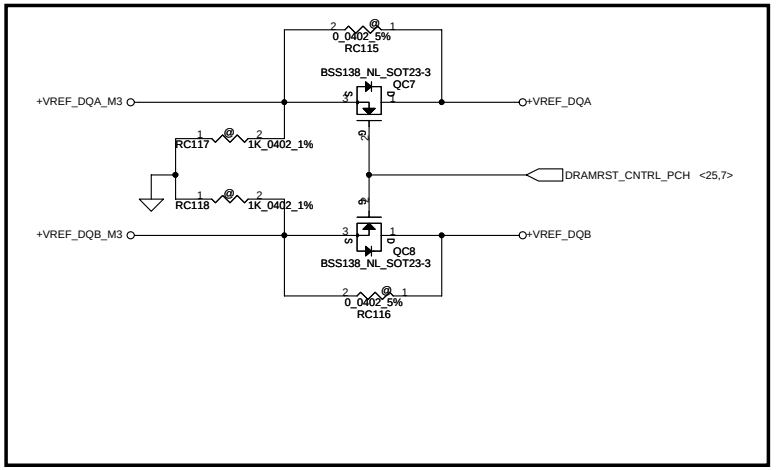





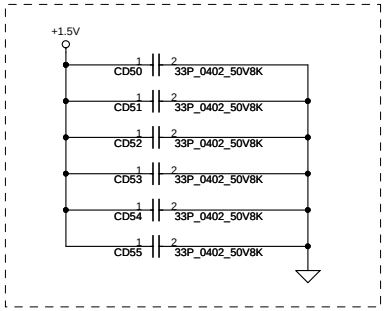

please place these caps near the reference power plane of CMD/AD





close to JDDR3R.126

SPD setting (SA0, SA1)
PU/PD by Channel A/B
->Channel A 00
->Channel B 01

Layout Note: Place near JDDRH



Layout Note: Place these 4 Caps near Command and Control signals of DIMMA



Layout Note: Place near JDDRH.203 and 204



Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: ***DDRIII-SODIMM0***

Size	Document Number	Rev
Custom	VCUAA	1.0

Date: Tuesday, October 16, 2012 | Sheet 11 of 53

Standard Type
DDR3 SO-DIMM B

DDR_B_DQS#[0..7] <7>
DDR_B_DQS[0..7] <7>
DDR_B_D[0..63] <7>
DDR_B_MA[0..15] <7>

JDDR3S

+VREF_DQB

CD28 2.2U_0402_6.3V6M
CD27 0.1U_0402_10V7K
Close to JDDR3S.1

SM_DRAMRST# <11,7>

<7> DDRB_CKE0
<7> DDR_B_BS2
<7> DDRB_CLK0
<7> DDRB_CLK0#
<7> DDR_B_WE#
<7> DDR_B_CAS#
<7> DDRB_SCS1#

DDRB_CKE1 <7>
DDRB_CLK1 <7>
DDRB_CLK1# <7>
DDR_B_BS1 <7>
DDR_B_RAS# <7>
DDRB_SCS0# <7>
DDRB_ODT0 <7>
DDRB_ODT1 <7>

+1.5V
RD12 1K_0402_1%
RD13 1K_0402_1%
+VREF_CAB

CD46 2.2U_0402_6.3V6M
CD47 0.1U_0402_10V7K
Close to JDDR3S.126

RD14 10K_0402_5%
RD15 10K_0402_5%
+3VSO
+0.75VS

CD48 2.2U_0402_6.3V6M
CD49 0.1U_0402_10V7K

PM_SMBDATA <11,25,34,41>
PM_SMBCLK <11,25,34,41>

LCN_DAN06-K4406-0102
@

SPD setting (SA0, SA1)
PU/PD by Channel A/B
->Channel A 00
->Channel B 01

Layout Note: Place near JDDRL

Layout Note: Place these 4 Caps near Command and Control signals of DIMMB

CD31 330U_D2_2VM_R6M
CD41 10U_0603_6.3V6M
CD36 10U_0603_6.3V6M
CD37 10U_0603_6.3V6M
CD38 10U_0603_6.3V6M
CD39 10U_0603_6.3V6M
CD40 10U_0603_6.3V6M
CD33 0.1U_0402_10V7K
CD29 0.1U_0402_10V7K
CD30 0.1U_0402_10V7K
CD32 0.1U_0402_10V7K

Layout Note: Place near JDDRL.203 and 204

CD57 10U_0603_6.3V6M
CD45 1U_0402_6.3V6K
CD42 1U_0402_6.3V6K
CD43 1U_0402_6.3V6K
CD44 1U_0402_6.3V6K

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: DDRIII-SODIMM1

Size: Custom | Document Number: VCUAA | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 12 of 53

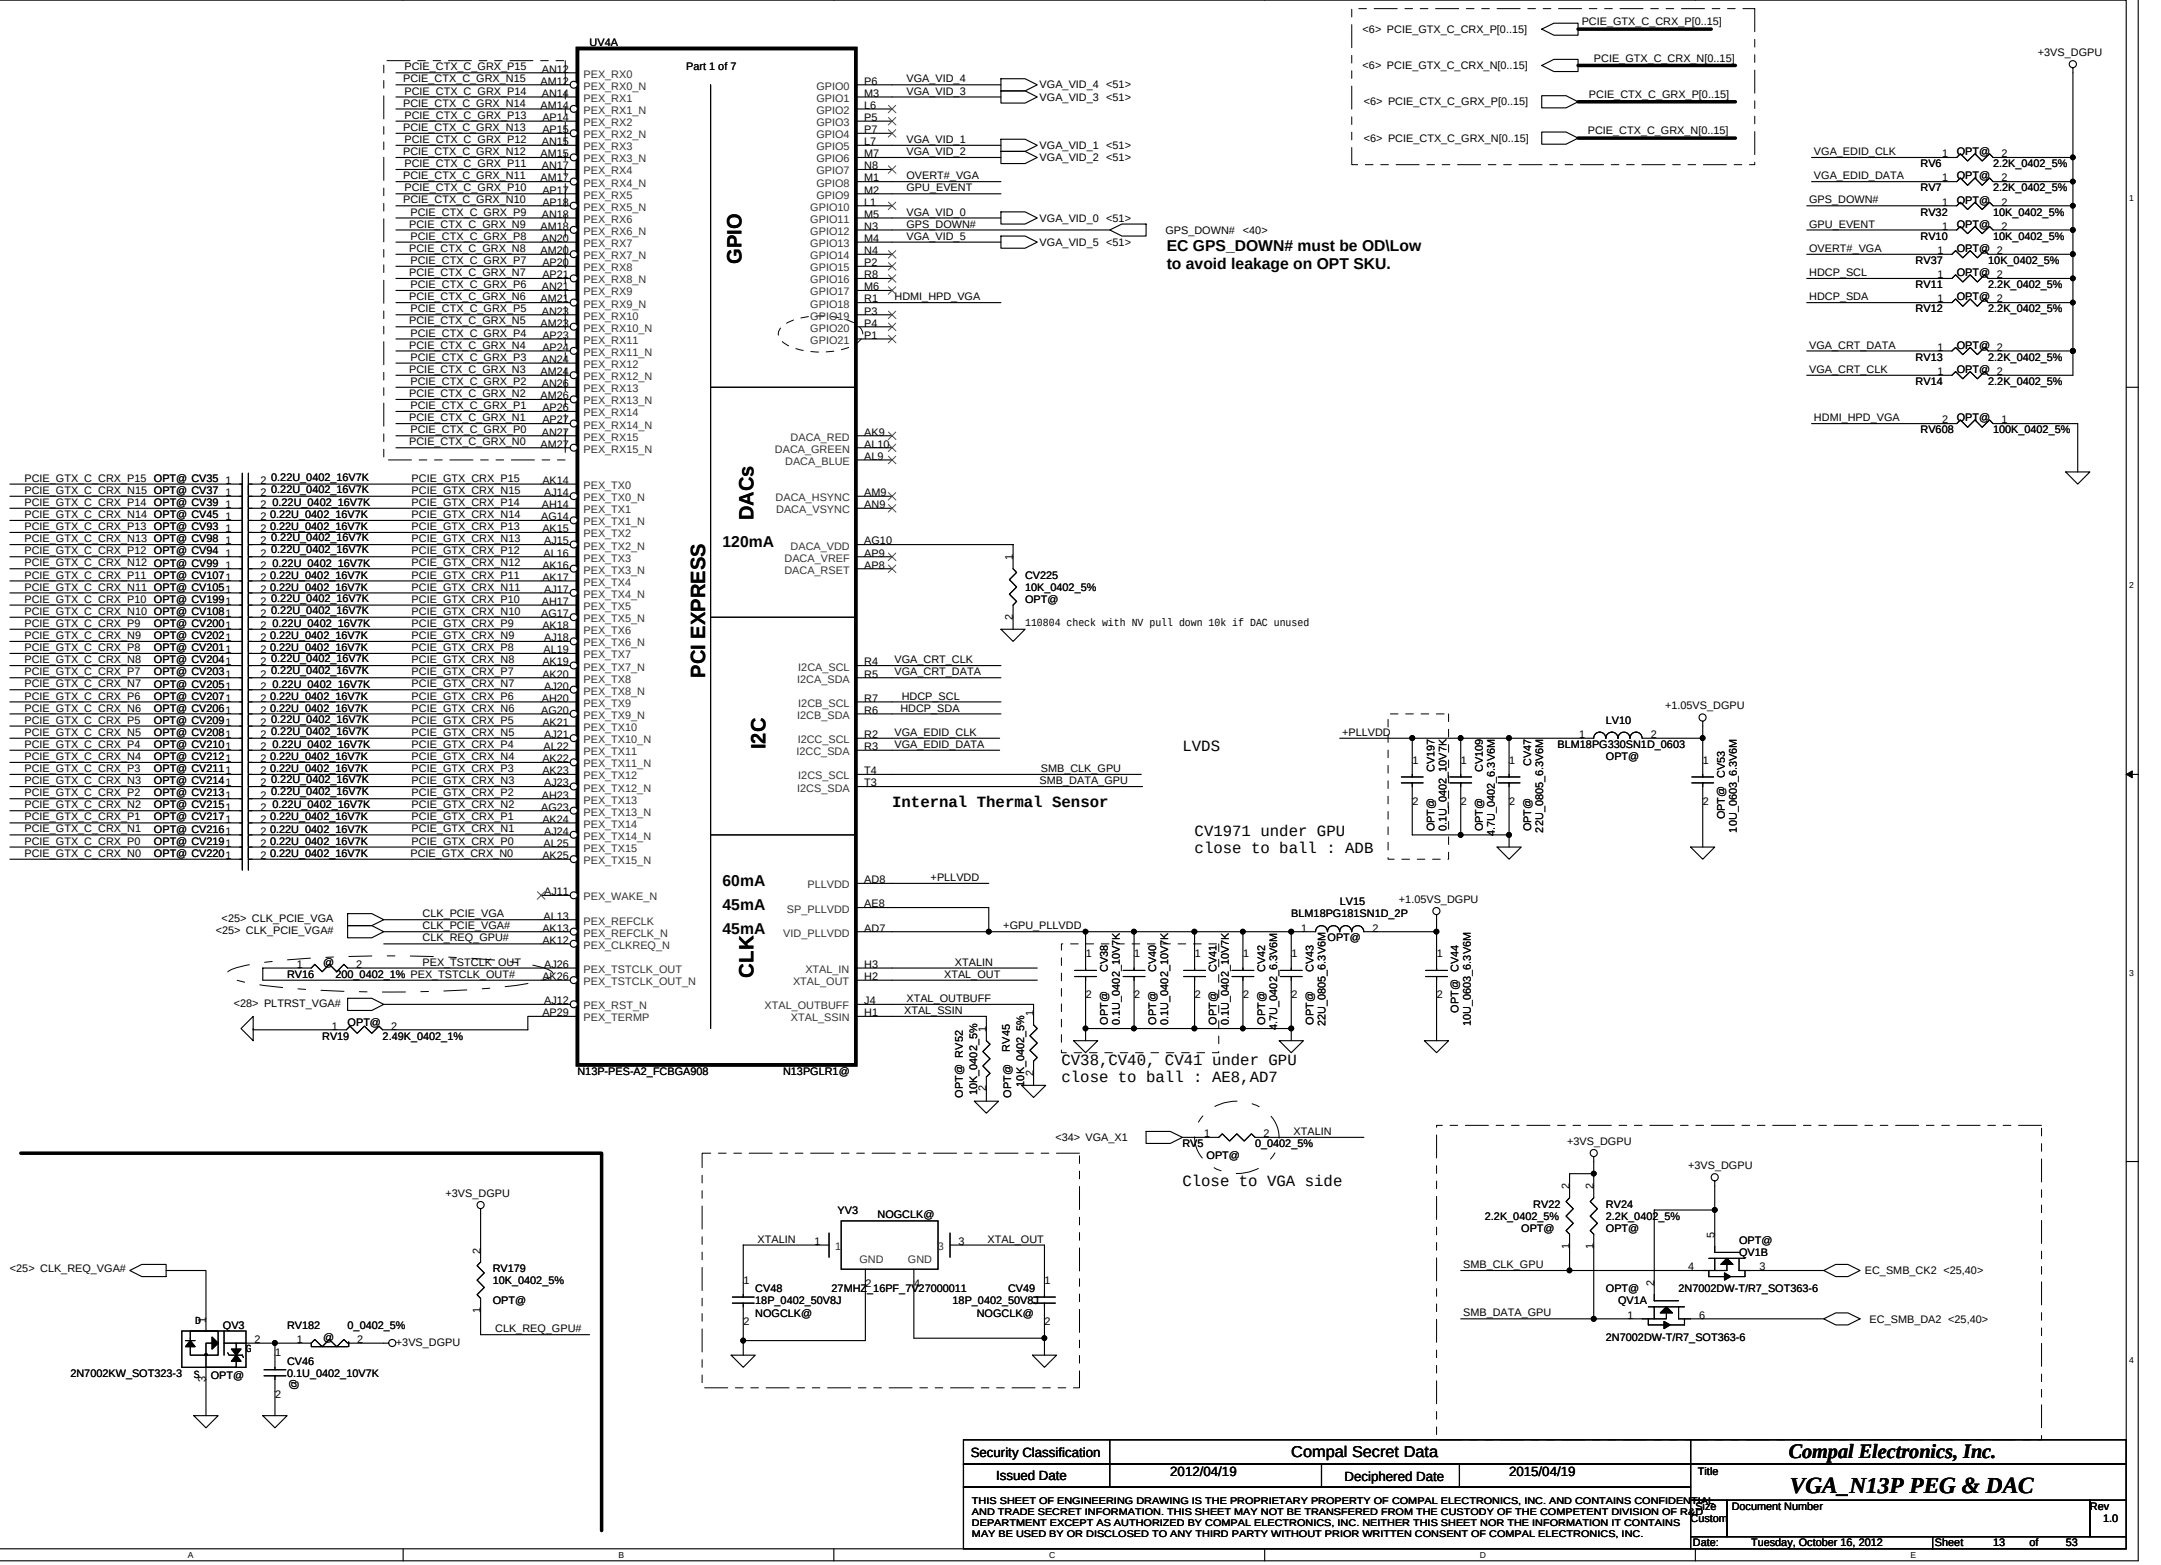

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.			
Title: VGA_N13P PEG & DAC			
Size: Custom	Document Number		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 13 of 53		

VRAM Interface

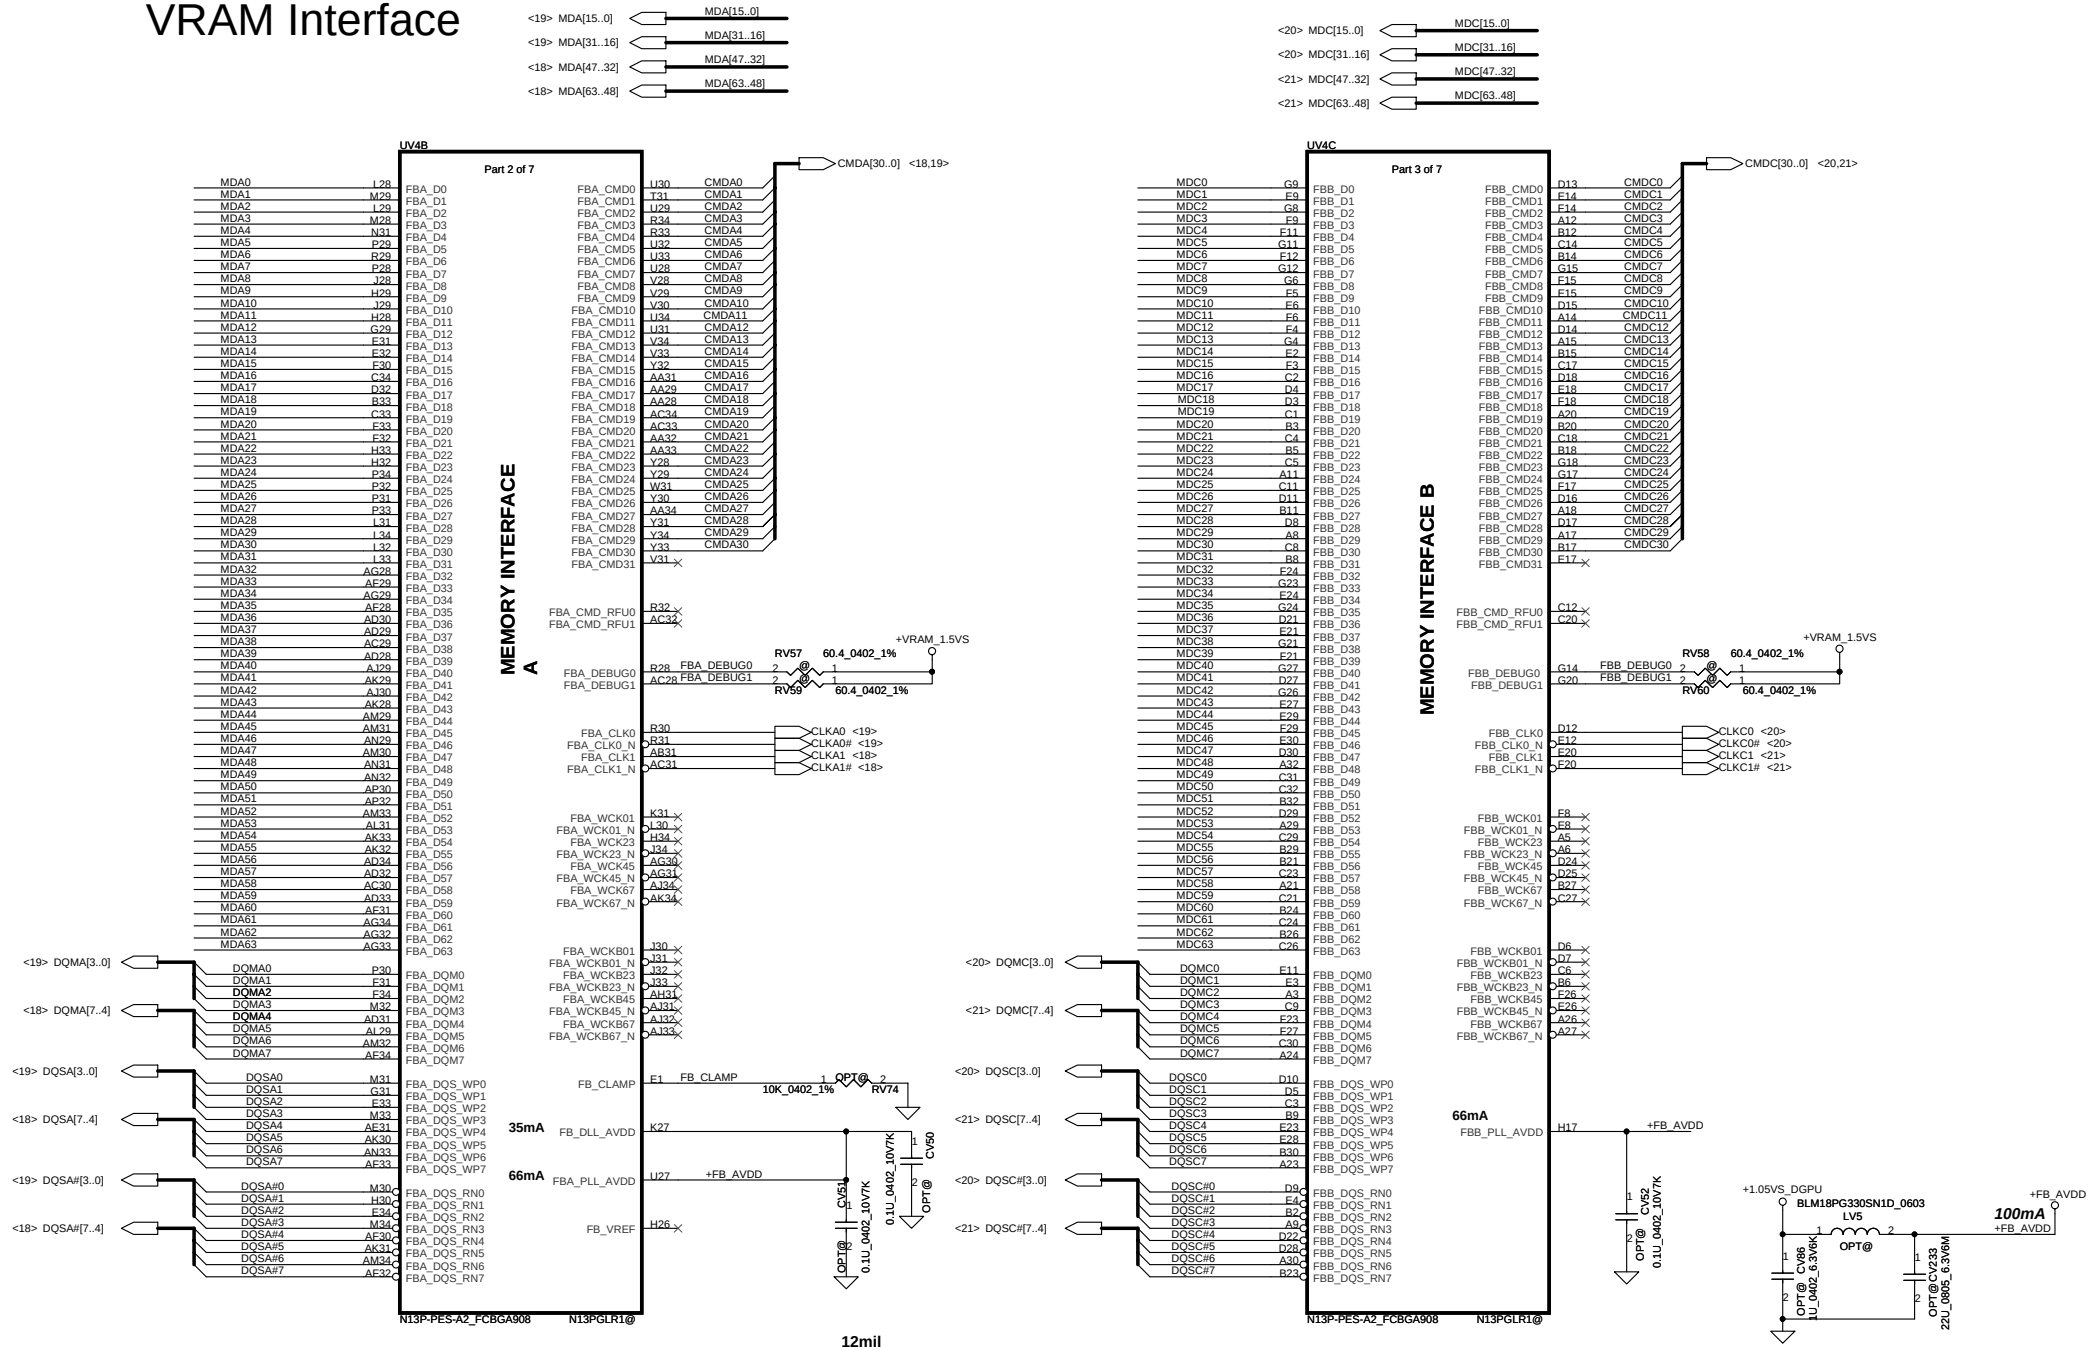

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: **N13P VRAM Interface**

Size	Document Number	Rev
Custom		1.0

Date: Tuesday, October 16, 2012 | Sheet 14 of 53

Physical Strapping pin	Power Rail	Logical Strapping Bit3	Logical Strapping Bit2	Logical Strapping Bit1	Logical Strapping Bit0
ROM_SO	+3VS_DGPU	XCLK_417 for GL , FB[1]	FB_0_BAR_SIZE for GL , FB[0]	SMB_ALT_ADDR	VGA_DEVICE
ROM_SCLK	+3VS_DGPU	**PCI_DEVID[4]**	SUB_VENDOR	**SLOT_CLK_CFG for GL PCI_DEVID[5]**	PEX_PLLEN_TERM
ROM_SI	+3VS_DGPU	**RAMCFG[3]**	**RAMCFG[2]**	**RAMCFG[1]**	**RAMCFG[0]**
STRAP0	+3VS_DGPU	USER[3]	USER[2]	USER[1]	USER[0]
STRAP1	+3VS_DGPU	3GIO_PADCFG[3]	3GIO_PADCFG[2]	3GIO_PADCFG[1]	3GIO_PADCFG[0]
STRAP2	+3VS_DGPU	**PCI_DEVID[3]**	**PCI_DEVID[2]**	**PCI_DEVID[1]**	**PCI_DEVID[0]**
STRAP3	+3VS_DGPU	SOR3_EXPOSED	SOR2_EXPOSED	SOR1_EXPOSED	SOR0_EXPOSED
STRAP4	+3VS_DGPU	RESERVED	PCIE_SPEED_CHANGE_GEN3	PCIE_MAX_SPEED	DP_PLL_VDD33V

SKU	Device ID	biit5 to bit0
N13P-GL ES2	0x0DE9	101001
N13P-GS ES1	0x0FDB	011011
N13P-GS QS	0x0FD2	010010

Resistor Values	Pull-up to +3VS _DGPU	Pull-down to Gnd
5K	1000	0000
10K	1001	0001
15K	1010	0010
20K	1011	0011
25K	1100	0100
30K	1101	0101
35K	1110	0110
45K	1111	0111

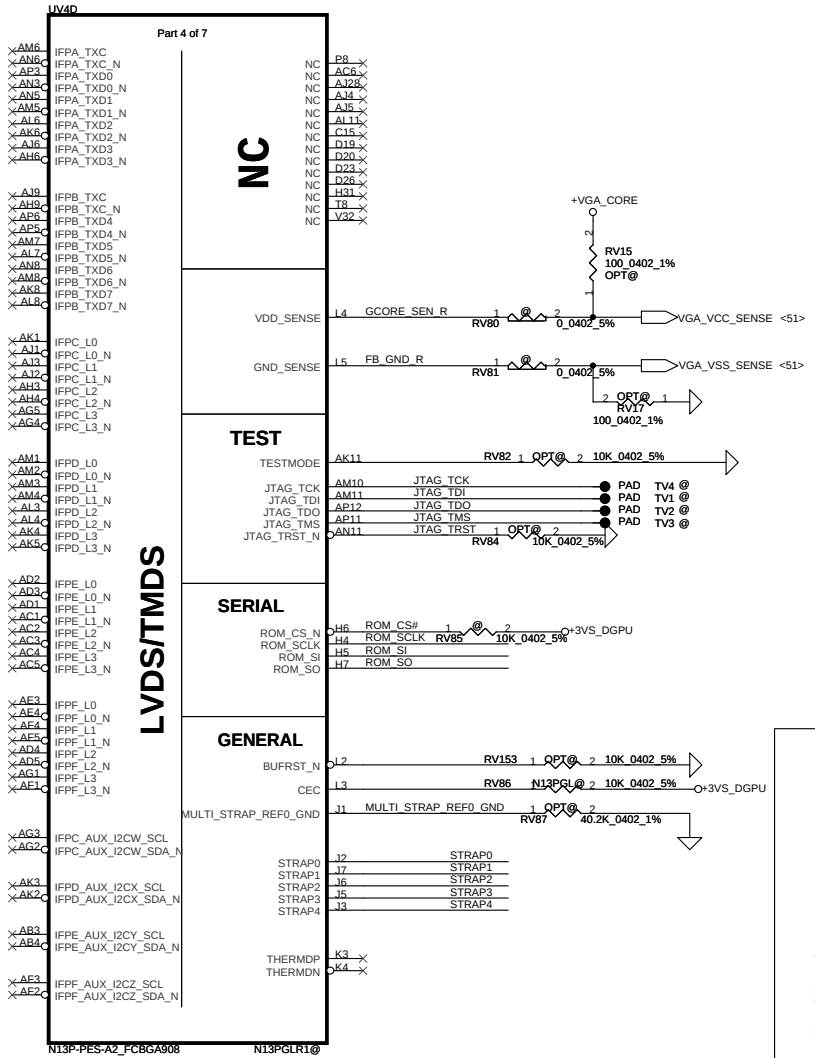

MULTI LEVEL STRAPS

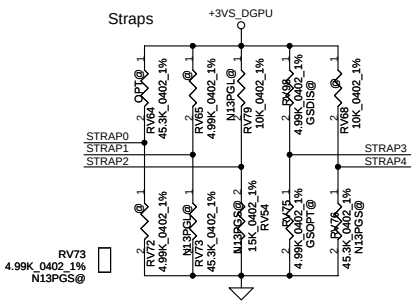



N13P-GL ROM_SI				
	Hynix (900MHZ) 64MX16 H5TQ1G63DFR-11C SA000041S20	**1GB**	**0010**	**RV77 PD 15K (SD034150280)**
	Hynix (900MHZ) 128MX16 H5TQ2G63BFR-11C SA00003YO00	**2GB**	**0110**	**RV77 PD 34.8k (SD034348280)**
	Hynix (900MHZ) 128MX16 H5TQ2G63DFR-11C SA00003YO70	**2GB**	**0101**	**RV77 PD 30k (SD034300280)**
	Samsung (900MHZ) 64MX16 K4W1G1646G-BC11 SA00004GS00	**1GB**	**0011**	**RV77 PD 20K (SD034200280)**
	Samsung (900MHZ) 128M16 K4W2G1646C-HC11 SA000047Q00	**2GB**	**0111**	**RV77 PD 45.3K (SD034453280)**
	Samsung (900MHZ) 128M16 K4W2G1646E-BC11 SA00005SH00	**2GB**	**0001**	**RV77 PD 10K (SD028100280)**

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: *VGA_N13P LVDS&TMDS*

Size	Document Number	Rev
Custom		1.0

Date: Tuesday, October 16, 2012 Sheet 15 of 53

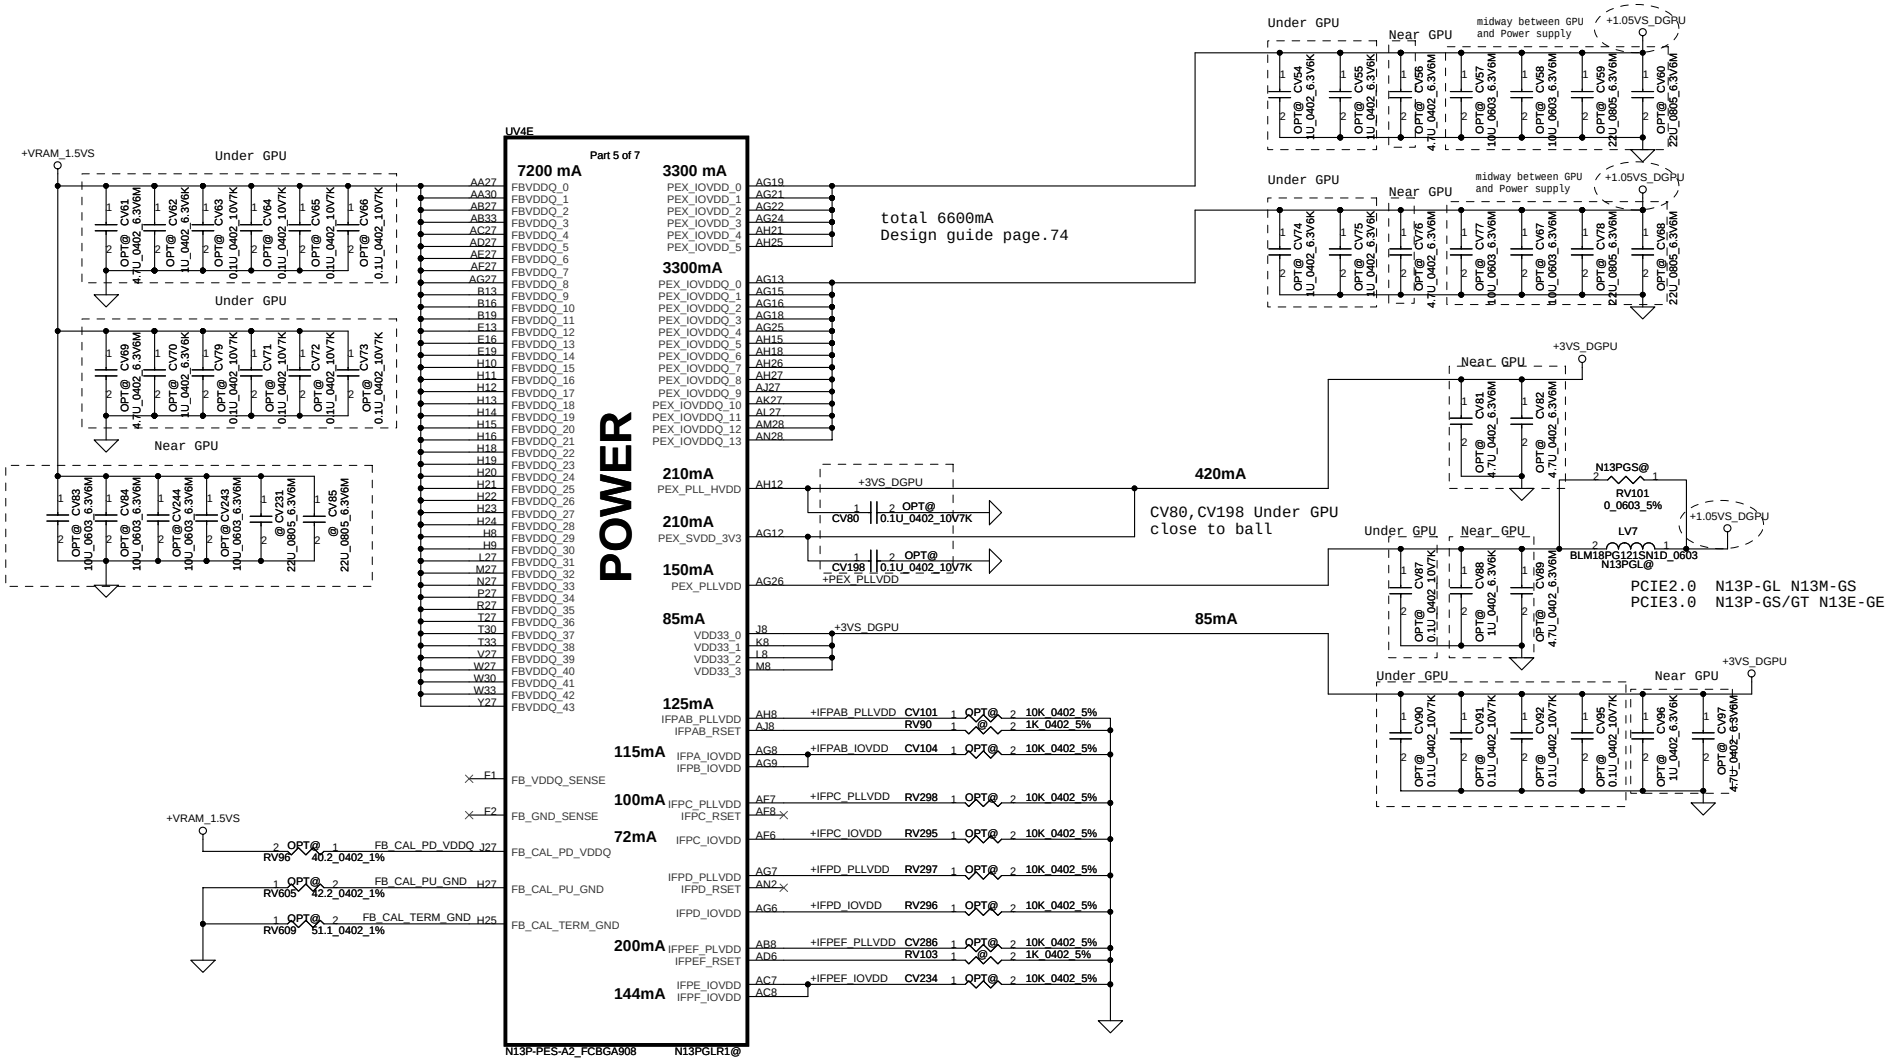

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Compal Electronics, Inc.

Title: **VGA_N13P POWER**

Size	Document Number	Rev
Custom		1.0

Date: Tuesday, October 16, 2012 Sheet 16 of 53

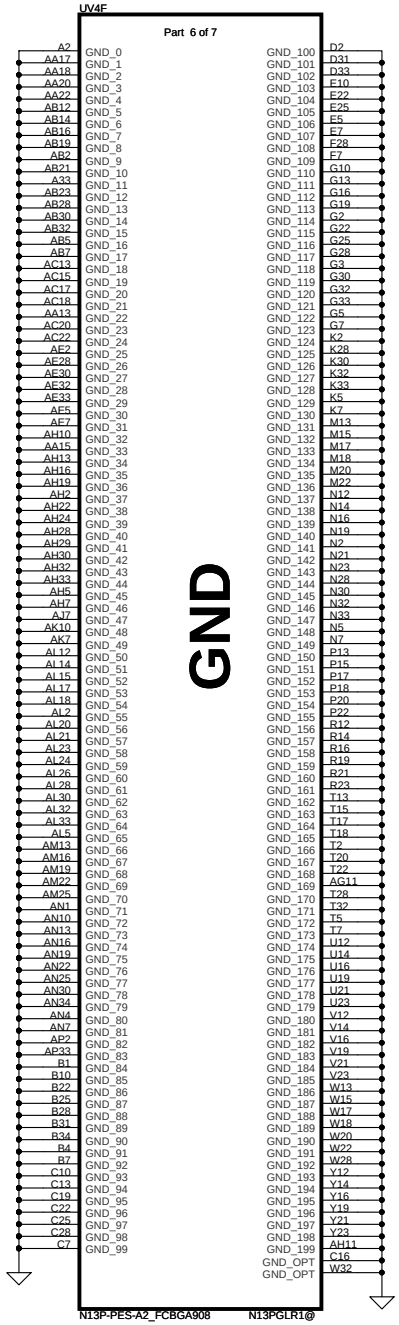

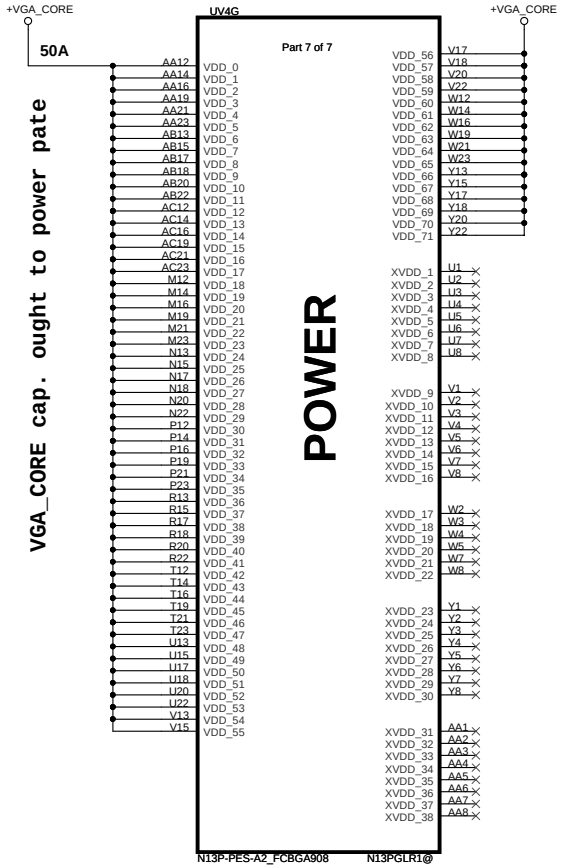

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: **VGA_N13P POWER & GND**

Size	Document Number	Rev
Custom		1.0

Date: Tuesday, October 16, 2012 Sheet 17 of 53

VRAM DDR3 chips (1GB)

64Mx16 DDR3 *8==>1GB

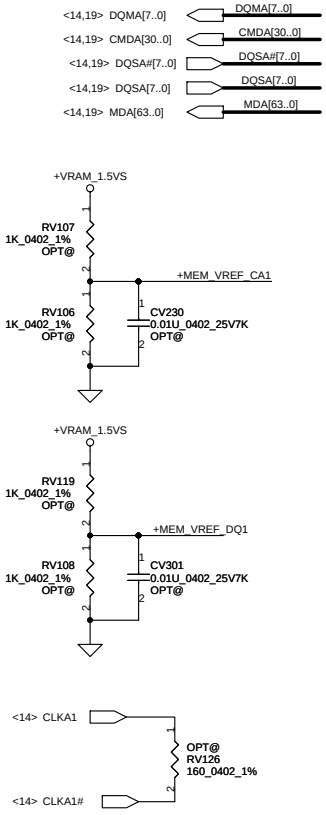

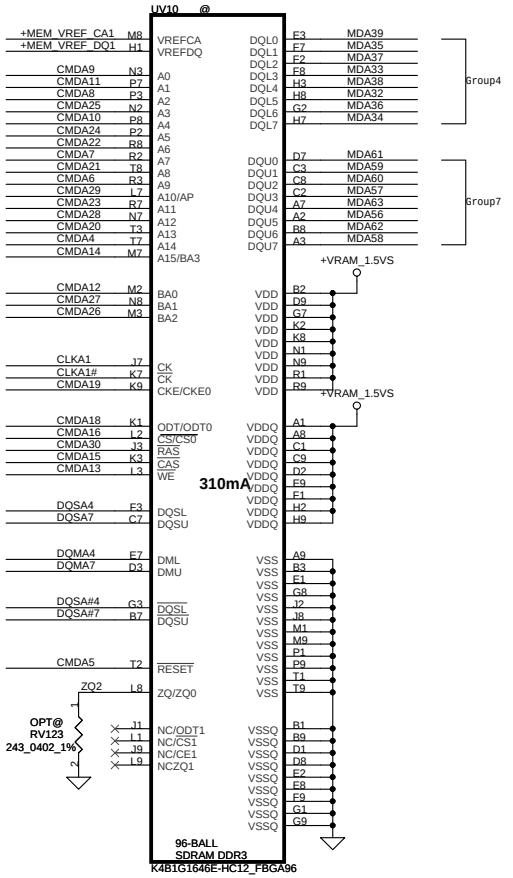

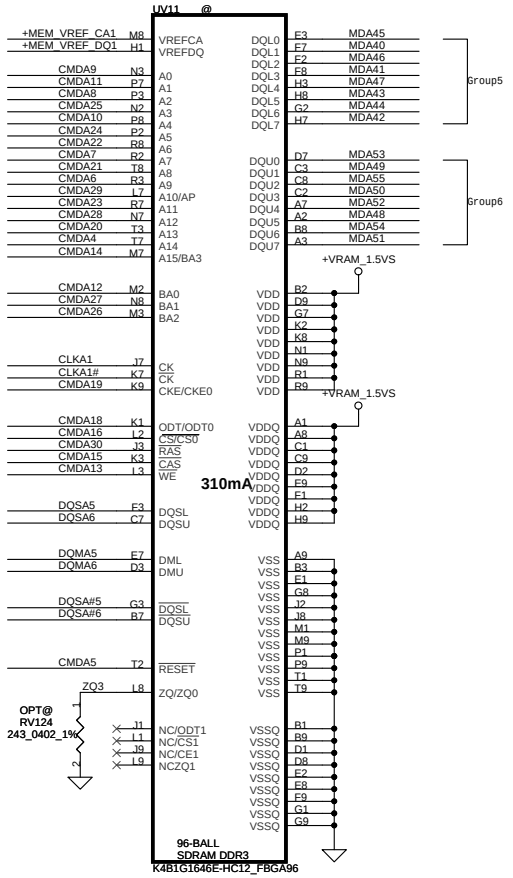

Mode D Address	0..31	32..63
CMD0	CS0_L#	
CMD1		
CMD2	ODT_L	
CMD3	CKE	
CMD4	A14	A14
CMD5	RST	RST
CMD6	A9	A9
CMD7	A7	A7
CMD8	A2	A2
CMD9	A0	A0
CMD10	A4	A4
CMD11	A1	A1
CMD12	BA0	BA0
CMD13	WE*	WE*
CMD14	A15	A15
CMD15	CAS*	CAS*
CMD16		CS0_H#
CMD17		
CMD18		ODT_H
CMD19		CKE_H
CMD20	A13	A13
CMD21	A8	A8
CMD22	A6	A6
CMD23	A11	A11
CMD24	A5	A5
CMD25	A3	A3
CMD26	BA2	BA2
CMD27	BA1	BA1
CMD28	A12	A12
CMD29	A10	A10
CMD30	RAS*	RAS*
Not Available		
	LOW	HIGH

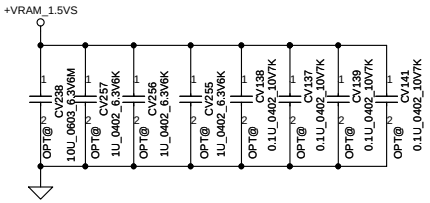

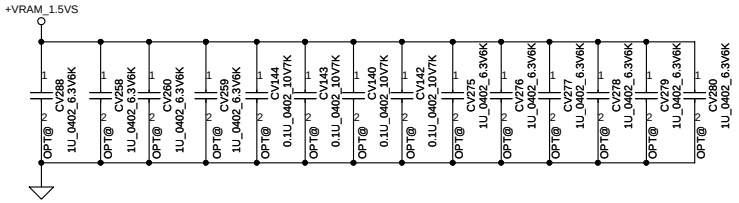

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: **VGA_N13P VRAM Channel AH**

Size: Custom | Document Number | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 18 of 53

VRAM DDR3 chips (1GB)

64Mx16 DDR3 *8==>1GB

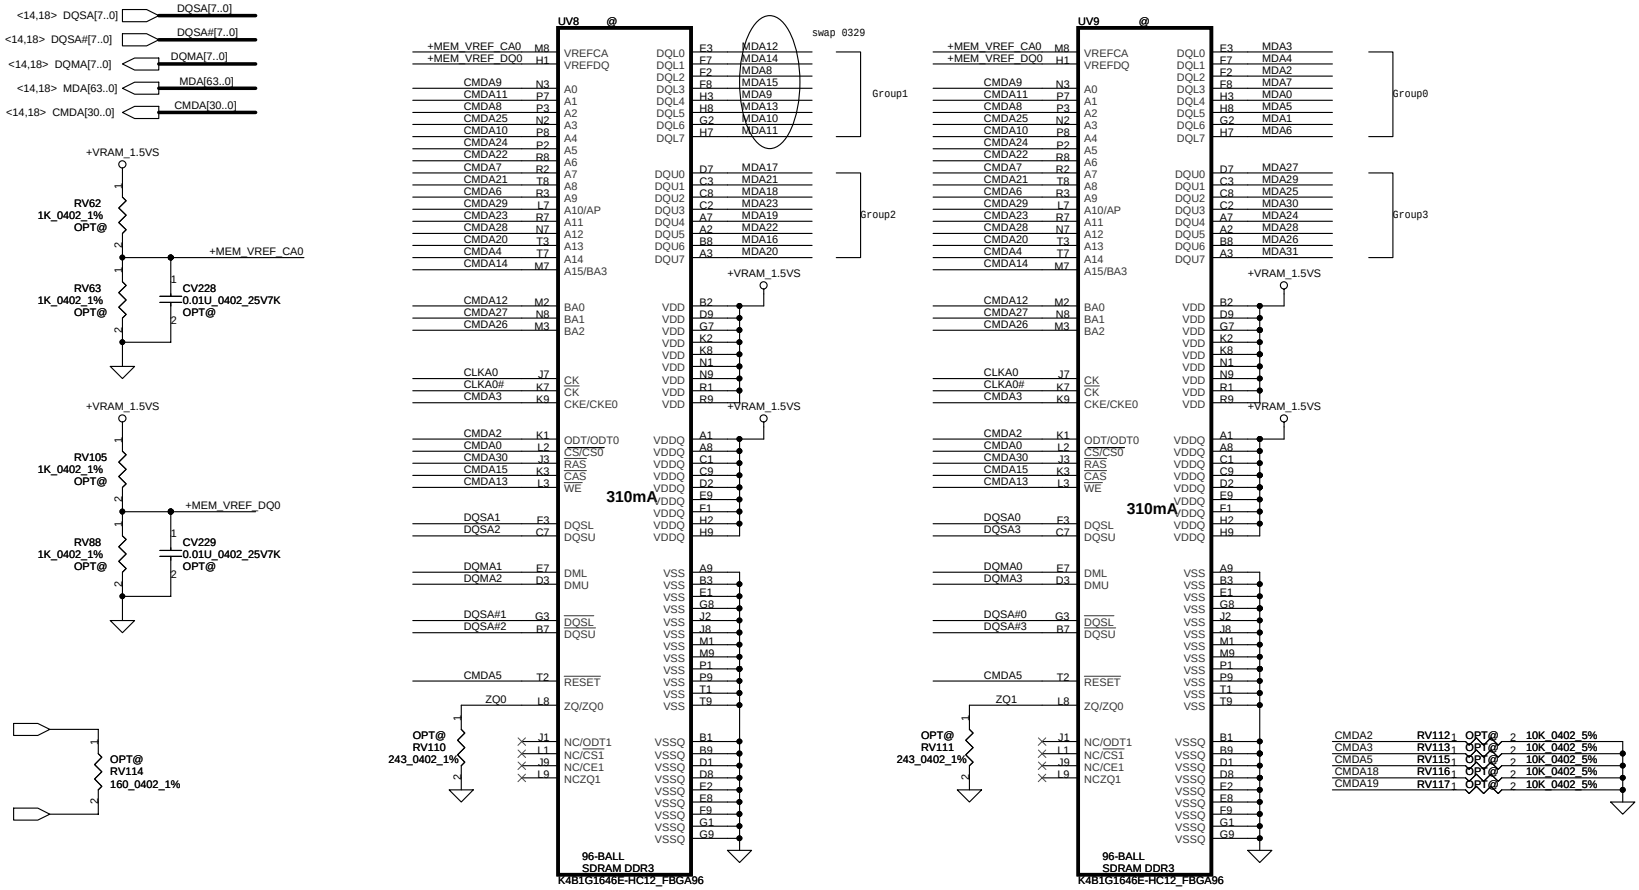

Mode D Address	0..31	32..63
CMD0	CS0_L#	
CMD1		
CMD2	ODT_L	
CMD3	CKE	
CMD4	A14	A14
CMD5	RST	RST
CMD6	A9	A9
CMD7	A7	A7
CMD8	A2	A2
CMD9	A0	A0
CMD10	A4	A4
CMD11	A1	A1
CMD12	BA0	BA0
CMD13	WE*	WE*
CMD14	A15	A15
CMD15	CAS*	CAS*
CMD16		CS0_H#
CMD17		
CMD18		ODT_H
CMD19		CKE_H
CMD20	A13	A13
CMD21	A8	A8
CMD22	A6	A6
CMD23	A11	A11
CMD24	A5	A5
CMD25	A3	A3
CMD26	BA2	BA2
CMD27	BA1	BA1
CMD28	A12	A12
CMD29	A10	A10
CMD30	RAS*	RAS*
Not Available		
	LOW	HIGH

CMDA2 RV112 OPT@ 10K_0402_5%
CMDA3 RV113 OPT@ 10K_0402_5%
CMDA5 RV115 OPT@ 10K_0402_5%
CMDA18 RV116 OPT@ 10K_0402_5%
CMDA19 RV117 OPT@ 10K_0402_5%

	Command Bit	Default Pull-down
DDR3	ODTx	10k
	CKEx	10k
	RST	10k
	CS*	No Termination

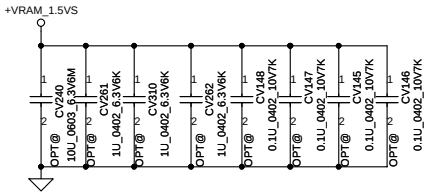

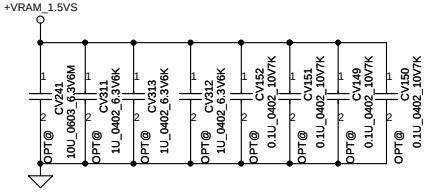

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: VGA_N13P VRAM Channel AL

Size: Custom | Document Number | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 19 of 53

VRAM DDR3 chips (1GB)

64Mx16 DDR3 *8==>1GB

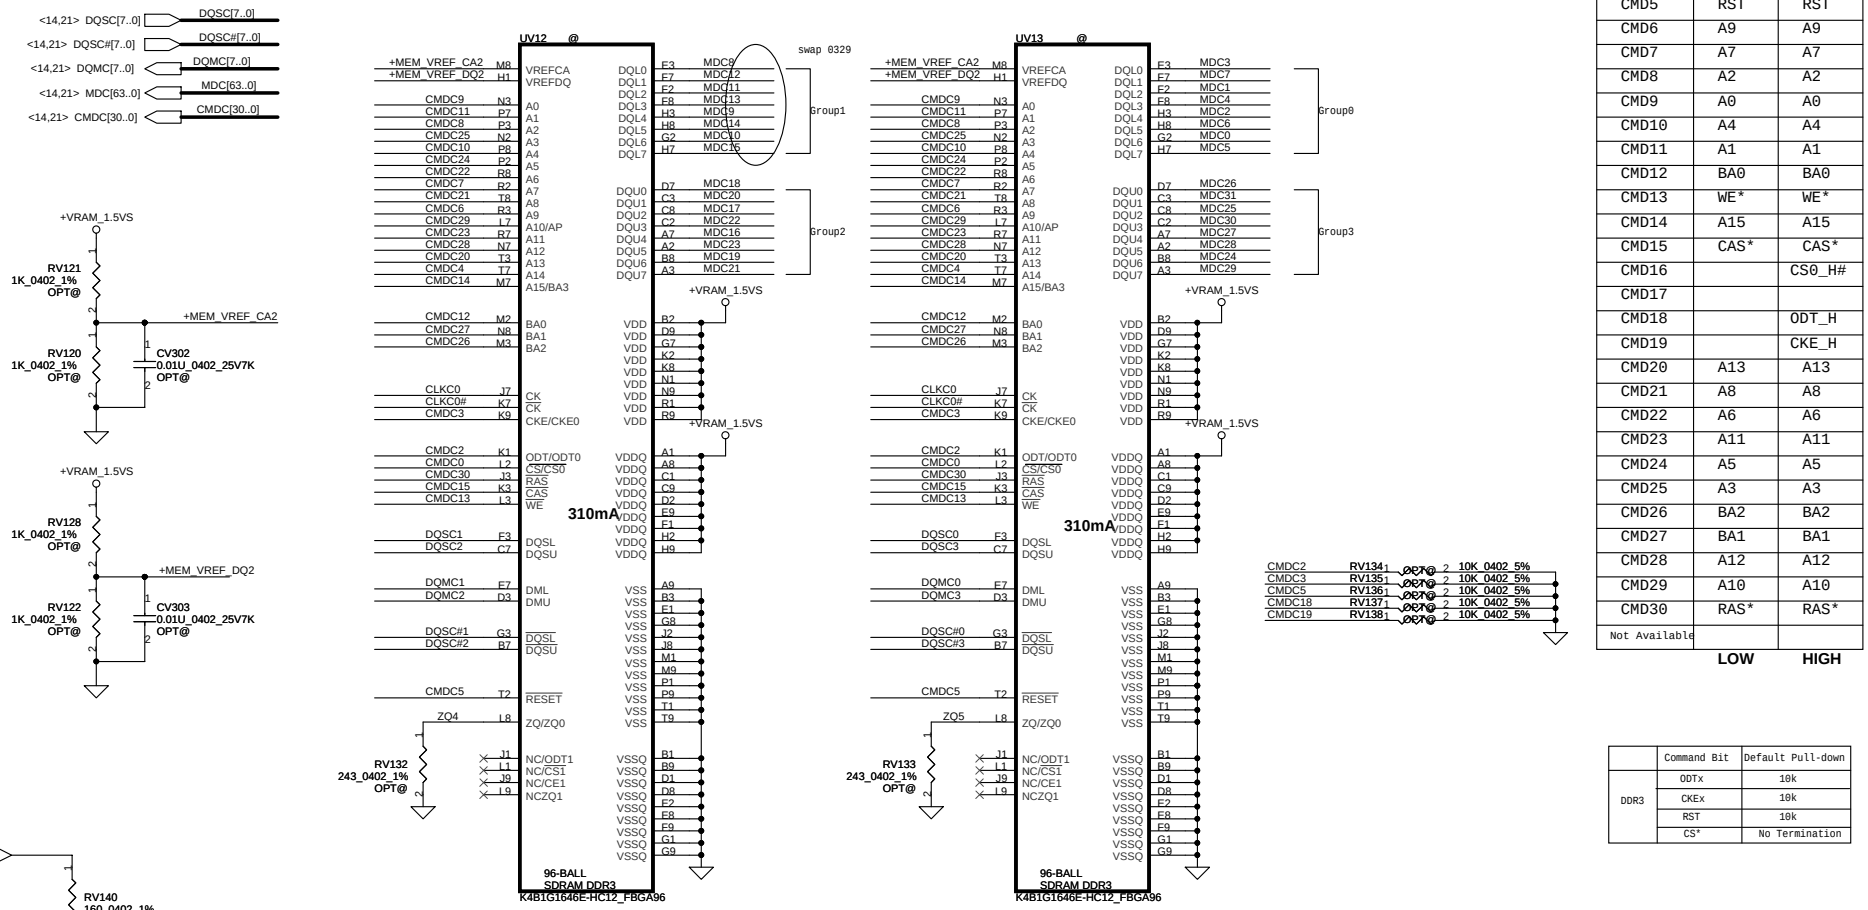

Mode D Address	0..31	32..63
CMD0	CS0_L#	
CMD1		
CMD2	ODT_L	
CMD3	CKE	
CMD4	A14	A14
CMD5	RST	RST
CMD6	A9	A9
CMD7	A7	A7
CMD8	A2	A2
CMD9	A0	A0
CMD10	A4	A4
CMD11	A1	A1
CMD12	BA0	BA0
CMD13	WE*	WE*
CMD14	A15	A15
CMD15	CAS*	CAS*
CMD16		CS0_H#
CMD17		
CMD18		ODT_H
CMD19		CKE_H
CMD20	A13	A13
CMD21	A8	A8
CMD22	A6	A6
CMD23	A11	A11
CMD24	A5	A5
CMD25	A3	A3
CMD26	BA2	BA2
CMD27	BA1	BA1
CMD28	A12	A12
CMD29	A10	A10
CMD30	RAS*	RAS*
Not Available		
	LOW	HIGH

	Command Bit	Default Pull-down
DDR3	ODTx	10k
	CKEx	10k
	RST	10k
	CS*	No Termination

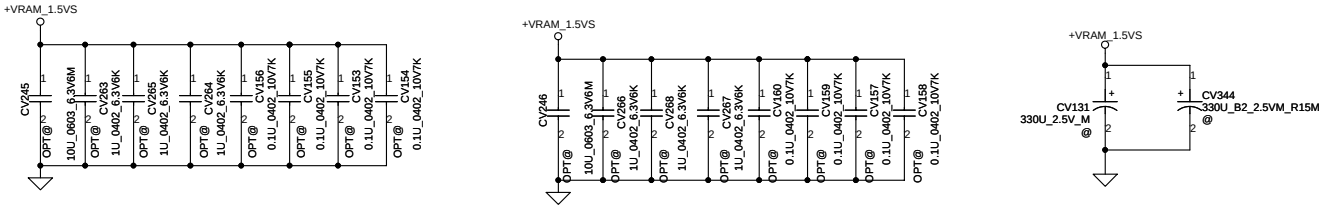

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.			
Title	VGA_N13P VRAM Channel CL		
Size	Document Number		Rev
Custom			1.0
Date:	Tuesday, October 16, 2012	Sheet	20 of 53

VRAM DDR3 chips (1GB)

64Mx16 DDR3 *8==>1GB









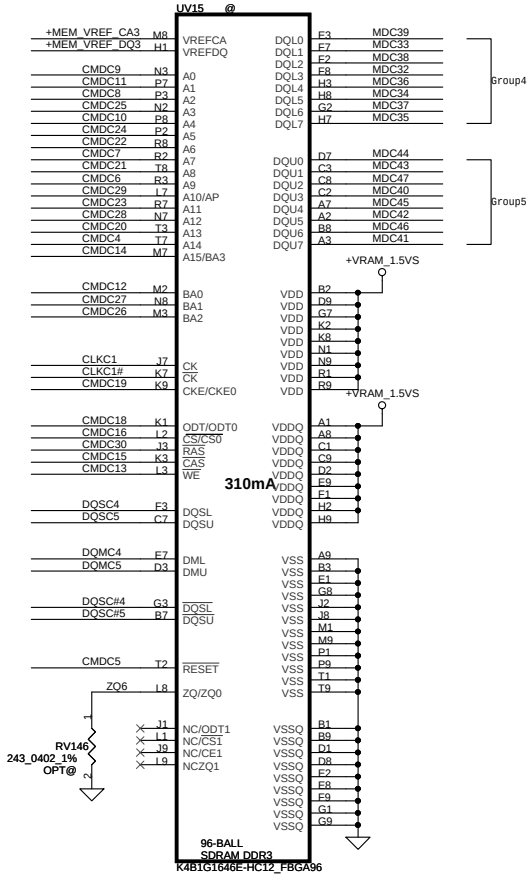

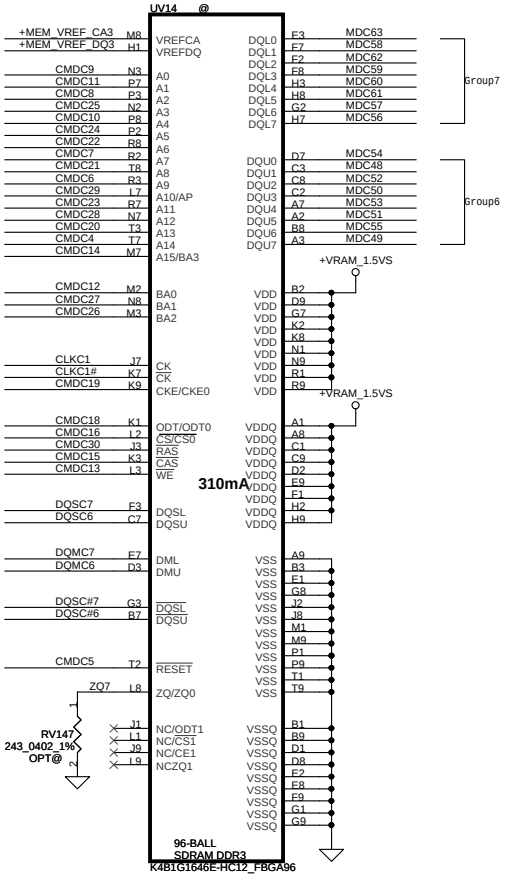

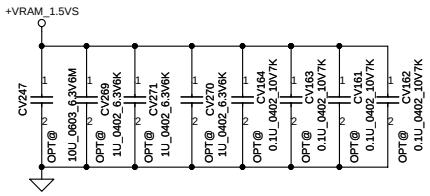

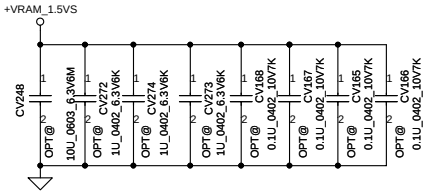

Mode D Address	0..31	32..63
CMD0	CS0_L#	
CMD1		
CMD2	ODT_L	
CMD3	CKE	
CMD4	A14	A14
CMD5	RST	RST
CMD6	A9	A9
CMD7	A7	A7
CMD8	A2	A2
CMD9	A0	A0
CMD10	A4	A4
CMD11	A1	A1
CMD12	BA0	BA0
CMD13	WE*	WE*
CMD14	A15	A15
CMD15	CAS*	CAS*
CMD16		CS0_H#
CMD17		
CMD18		ODT_H
CMD19		CKE_H
CMD20	A13	A13
CMD21	A8	A8
CMD22	A6	A6
CMD23	A11	A11
CMD24	A5	A5
CMD25	A3	A3
CMD26	BA2	BA2
CMD27	BA1	BA1
CMD28	A12	A12
CMD29	A10	A10
CMD30	RAS*	RAS*
Not Available		
	LOW	HIGH

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date 2015/04/19	Title VGA_N13P VRAM Channel CH
			Size Custom / Document Number / Rev 1.0
			Date: Tuesday, October 16, 2012 / Sheet 21 of 53

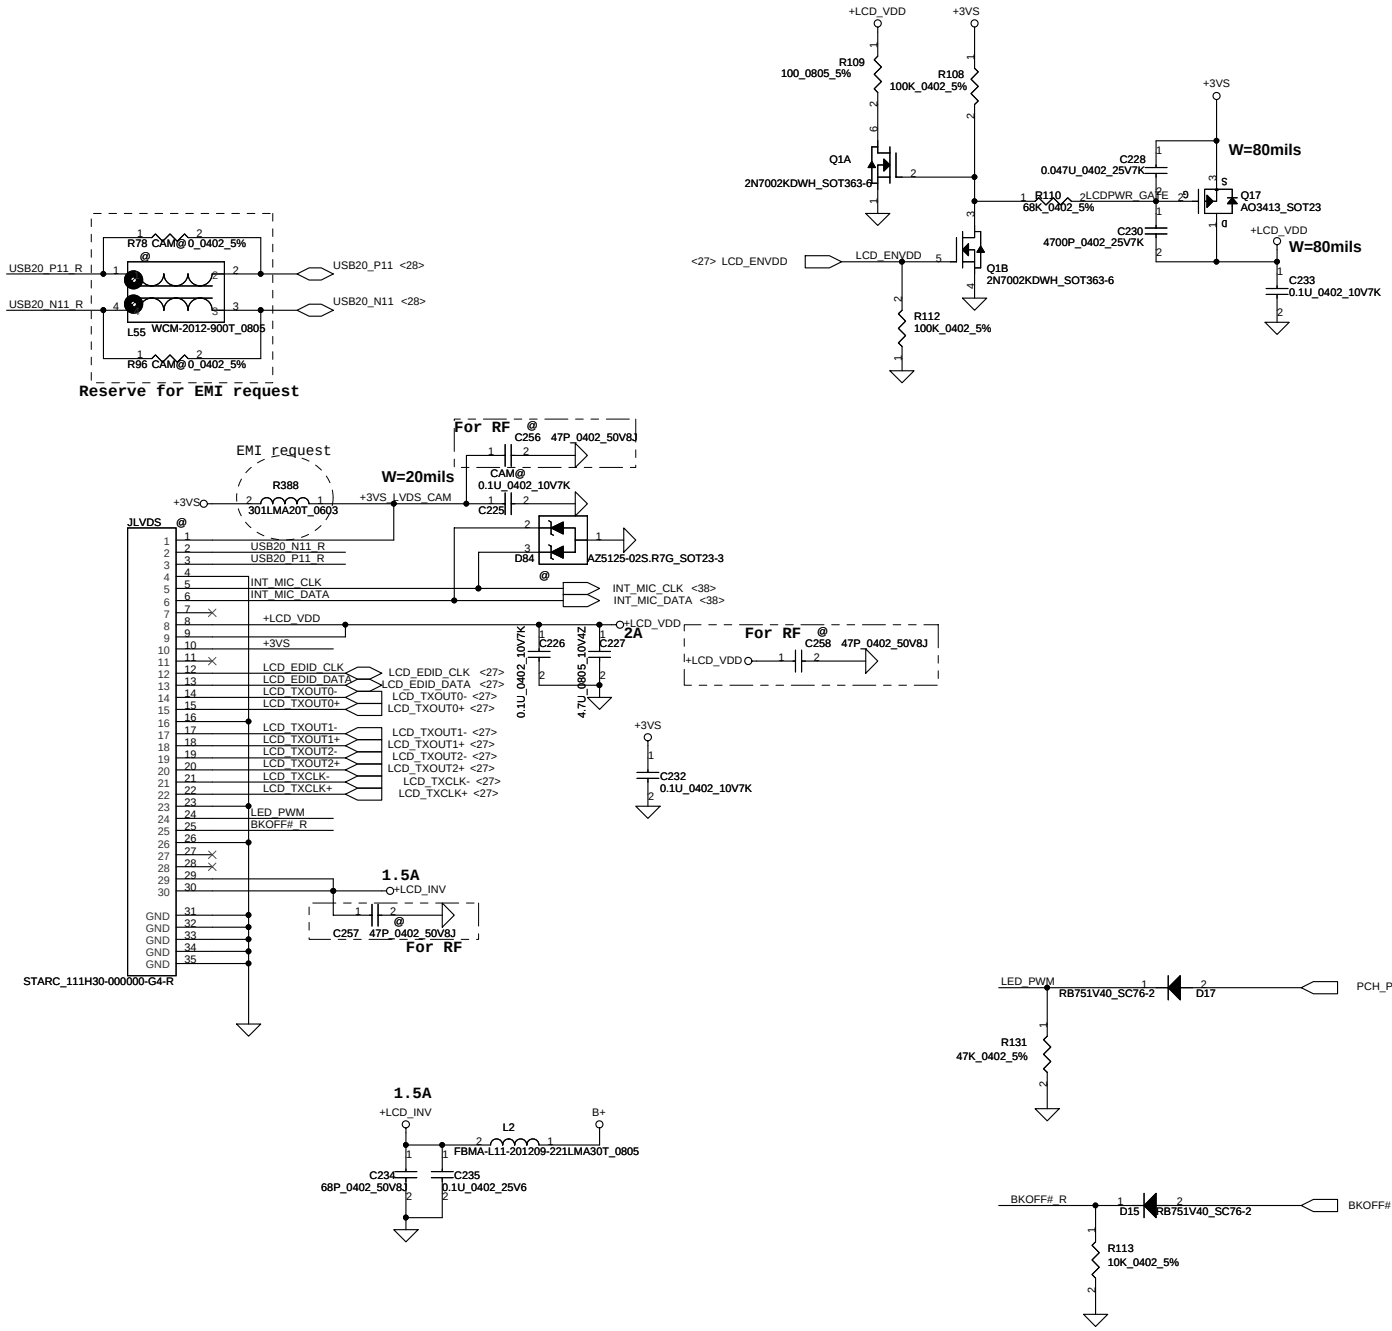

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date 2015/04/19	Title: LVDS
			Size: Custom; Document Number: VCUAA; Rev: 1.0
			Date: Tuesday, October 16, 2012; Sheet 22 of 53

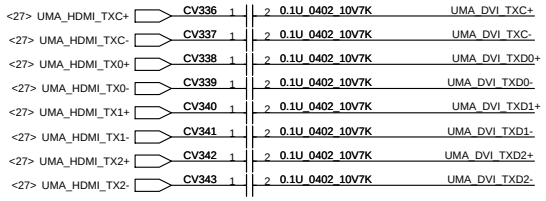

HDMI Royalty



HDMI W/O Logo: RO0000001HM
HDMI W/Logo: RO0000002HM
HDMI W/Logo + HDCP: RO0000003HM

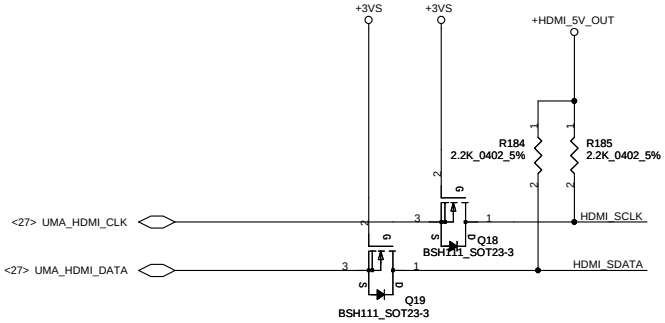

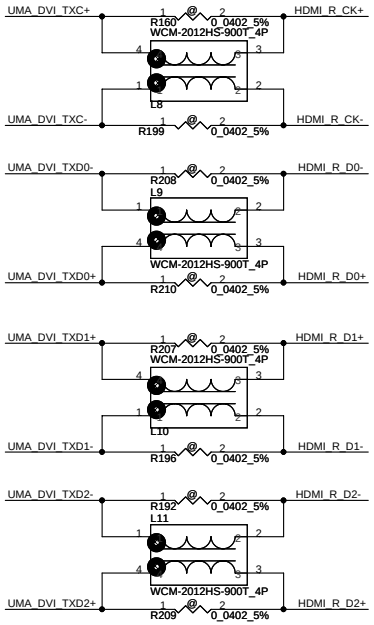

common CHOKE use 67ohm
5/30 change to 90ohm EMI request

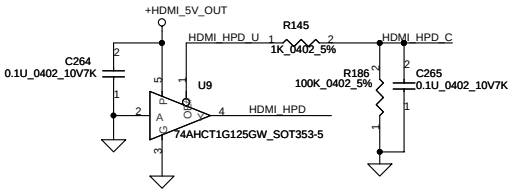

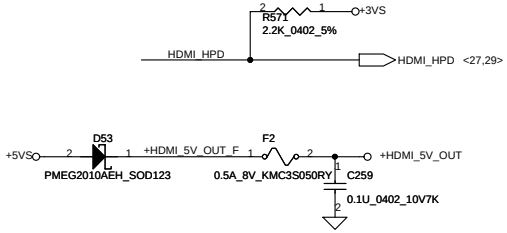

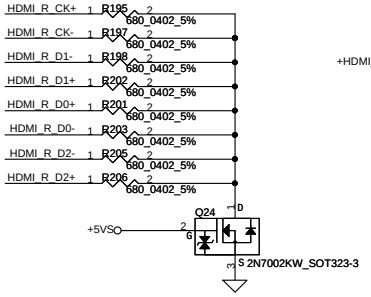

HDMI Connector

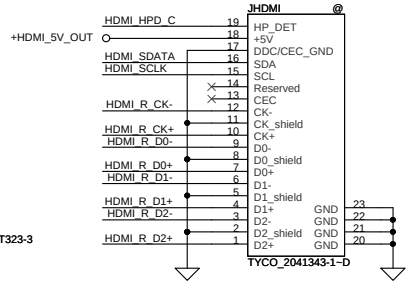

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date 2015/04/19	Title: HDMI Conn.
Size	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 23 of 53		

CMOS Setting, near DDR Door

iME Setting.

Placement near to YH1

Integrated SUS 1.05V VRM Enable	
PCH_INTVRMEN	High - Enable Internal VRs (must be always pulled high)

PCH_SPKR
High = Enabled "No Reboot Mode"
* Low = Disabled (Default)

Change Net name due to this function is high active

HDA_SDO
ME debug mode,
this signal has a weak internal pull down
*Low = Disable (default)
High = Enable (flash descriptor security overide)

HDA_SYNC
*This signal has a weak internal pull down
H=>On Die PLL is supplied by 1.5V
L=>On Die PLL is supplied by 1.8V
Need to pull high for Chief River Mobile platform

BOOT BIOS Strap Bit 0
If use GCLK, please delete DH1

SPI ROM for BIOS & ME (4MByte)

4MB ROM P/N:
SA00003K800
SA00004LI00

SPI ROM for Win8 (2MByte)

2MB ROM P/N:
SA000041N00
SA00003FO10

Socket: SP07000F500/SP07000H900
Please place U13 & U4 close to U2 PCH,
please place RH66, RH67, RH68 near UH3
Please place RH267 near RH66, Please place RH271 near RH67,
Please place RH269 near RH68.

Un-mount for reduce power consumption at S0, S3 state

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: PCH_HDA/JTAG/SATA/SPI/LPC

Size: Custom | Document Number: VCUAA | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 24 of 53

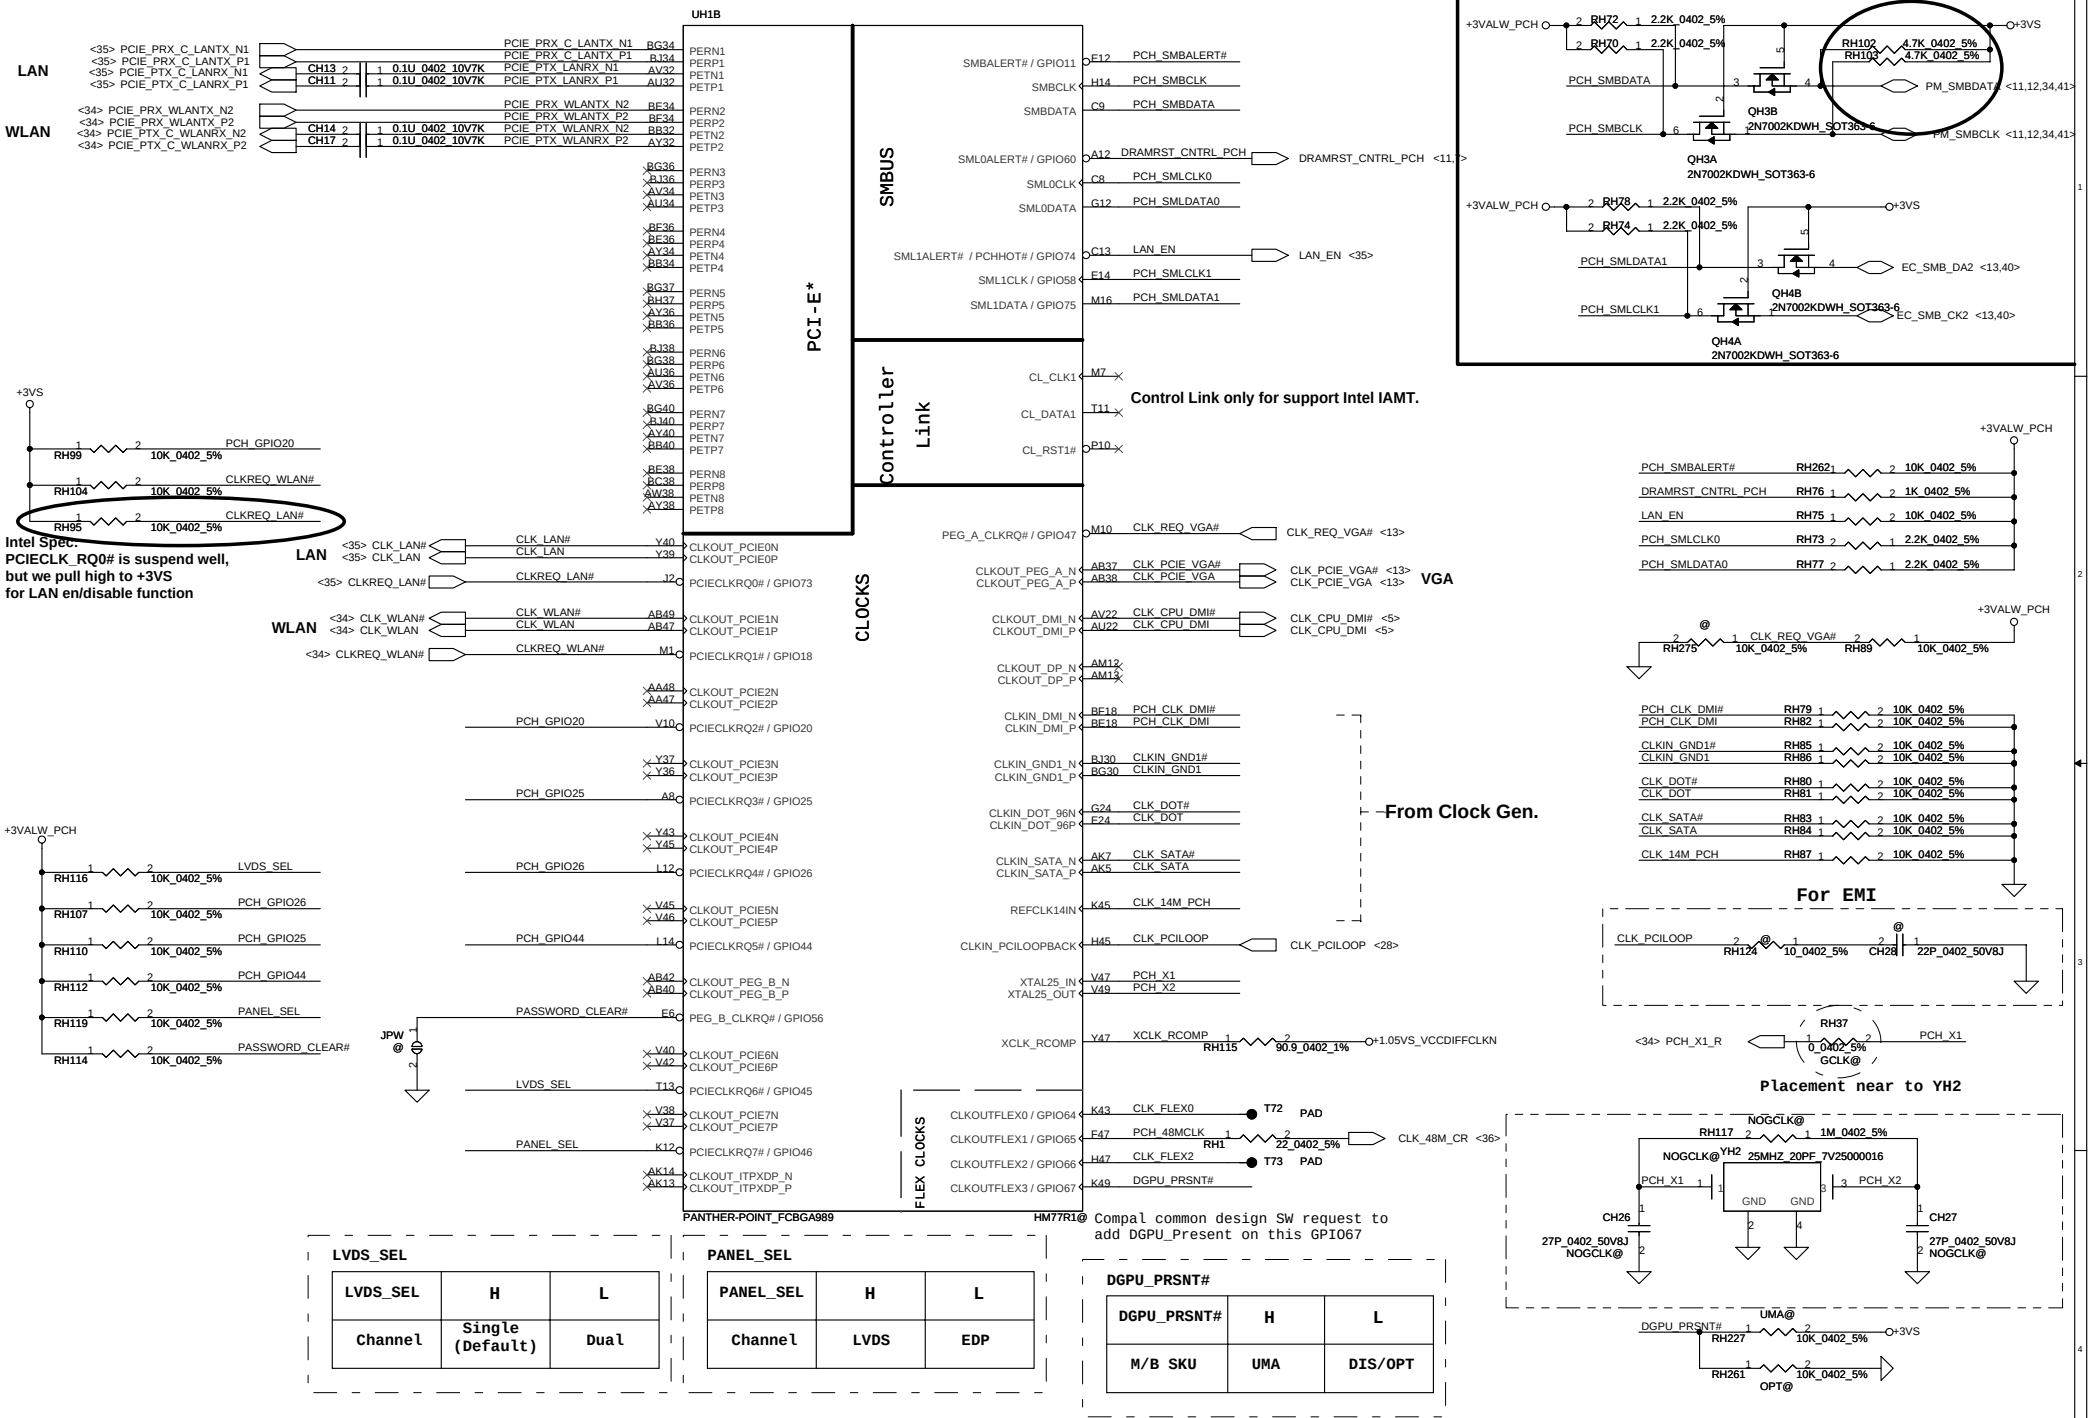

LVDS_SEL

LVDS_SEL	H	L
Channel	Single (Default)	Dual

PANEL_SEL

PANEL_SEL	H	L
Channel	LVDS	EDP

DGPU_PRSNT#

DGPU_PRSNT#	H	L
M/B SKU	UMA	DIS/OPT

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.	
Title	PCH_PCI-E/SMBUS/CLK
Size: Custom	Document Number: VCUAA
Rev	1.0
Date: Tuesday, October 16, 2012	Sheet 25 of 53

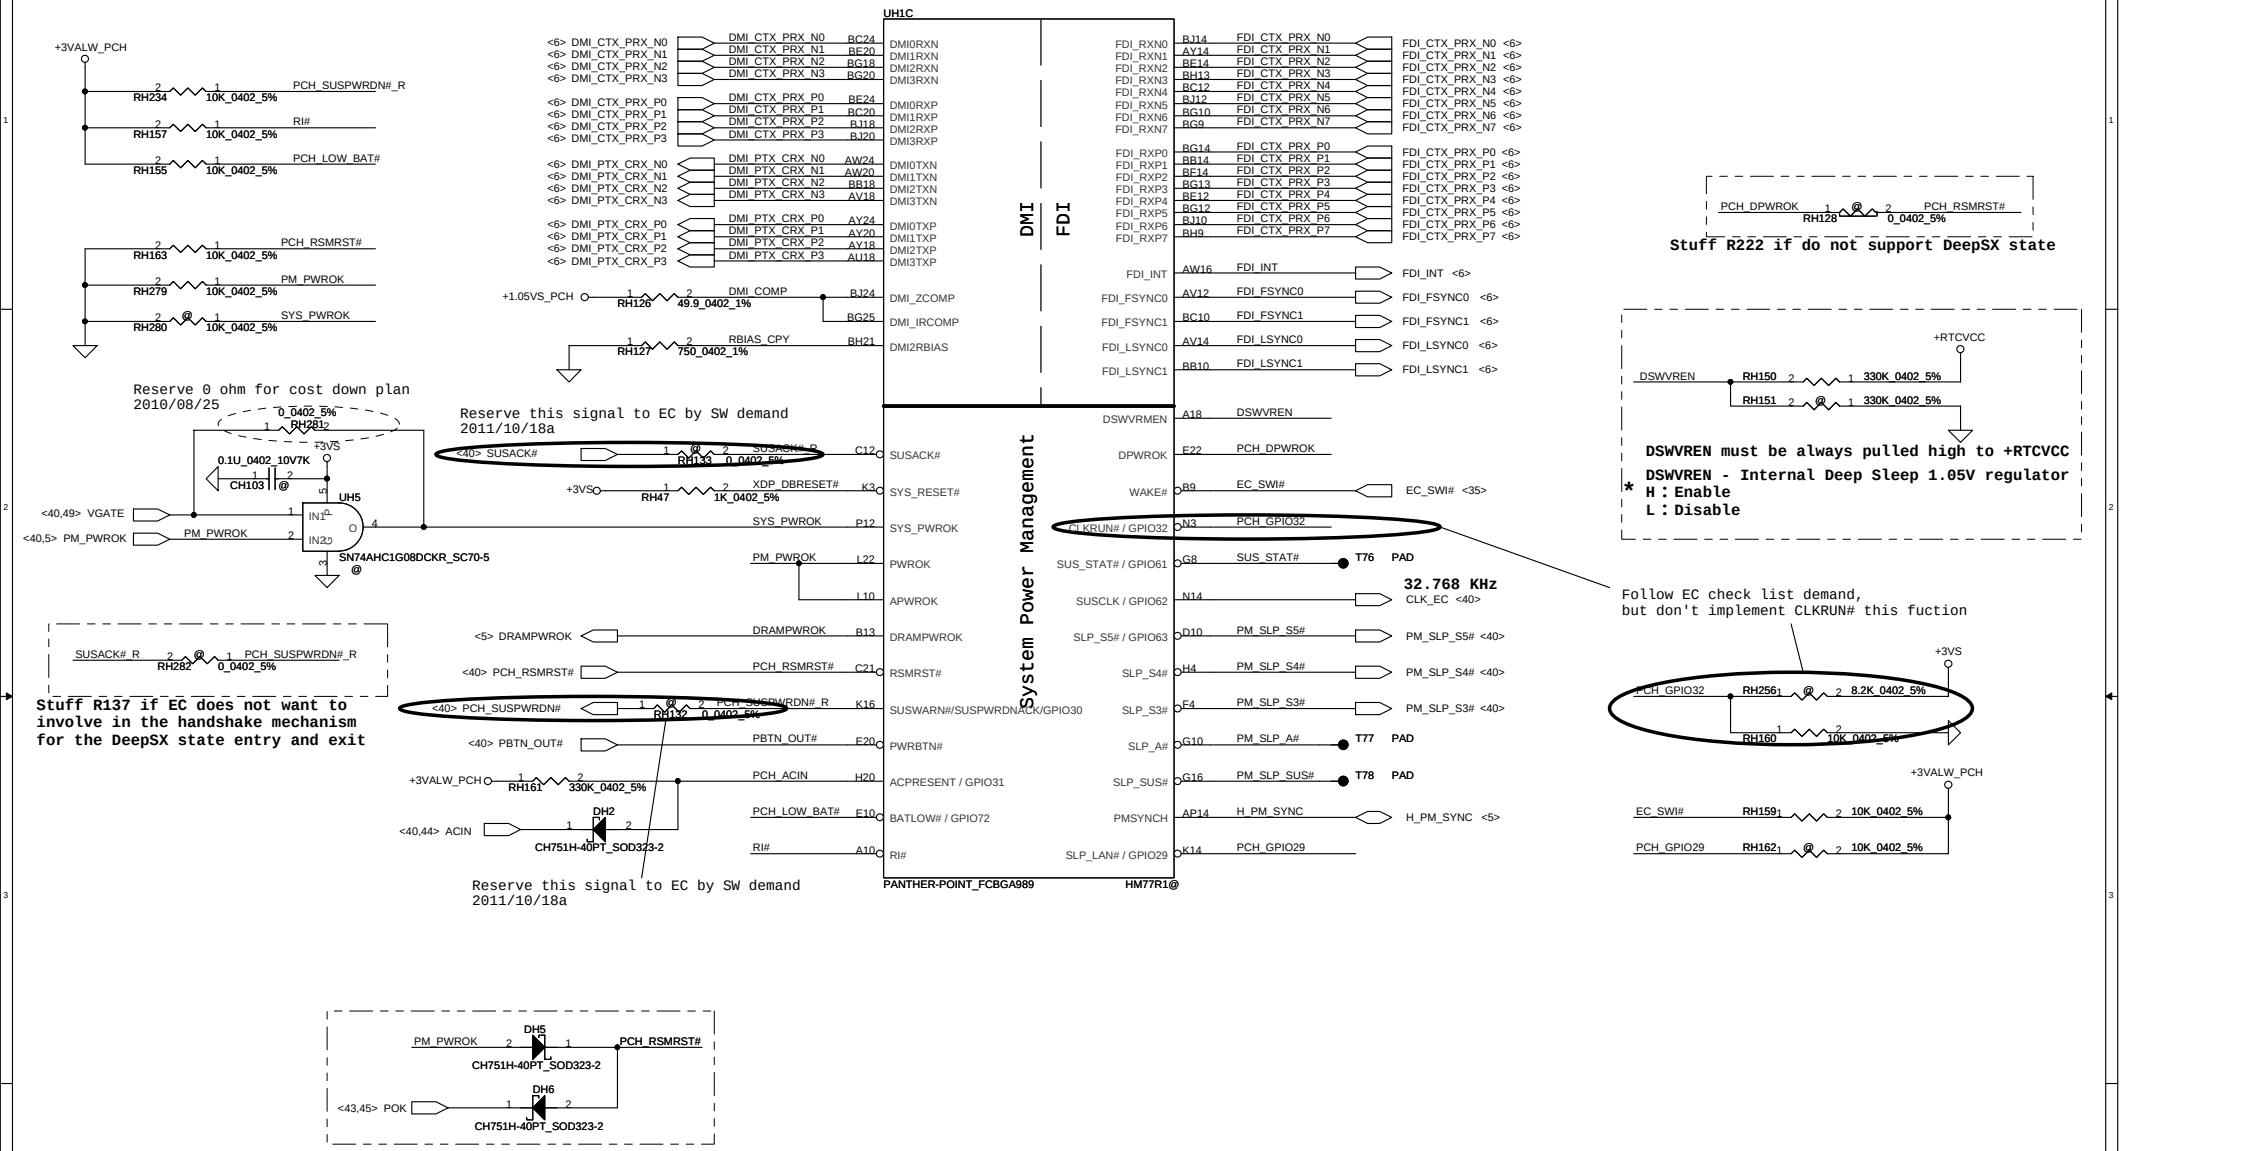

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.			
Title: PCH_DMI/FDI/PM			
Size: Custom	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 26 of 53		

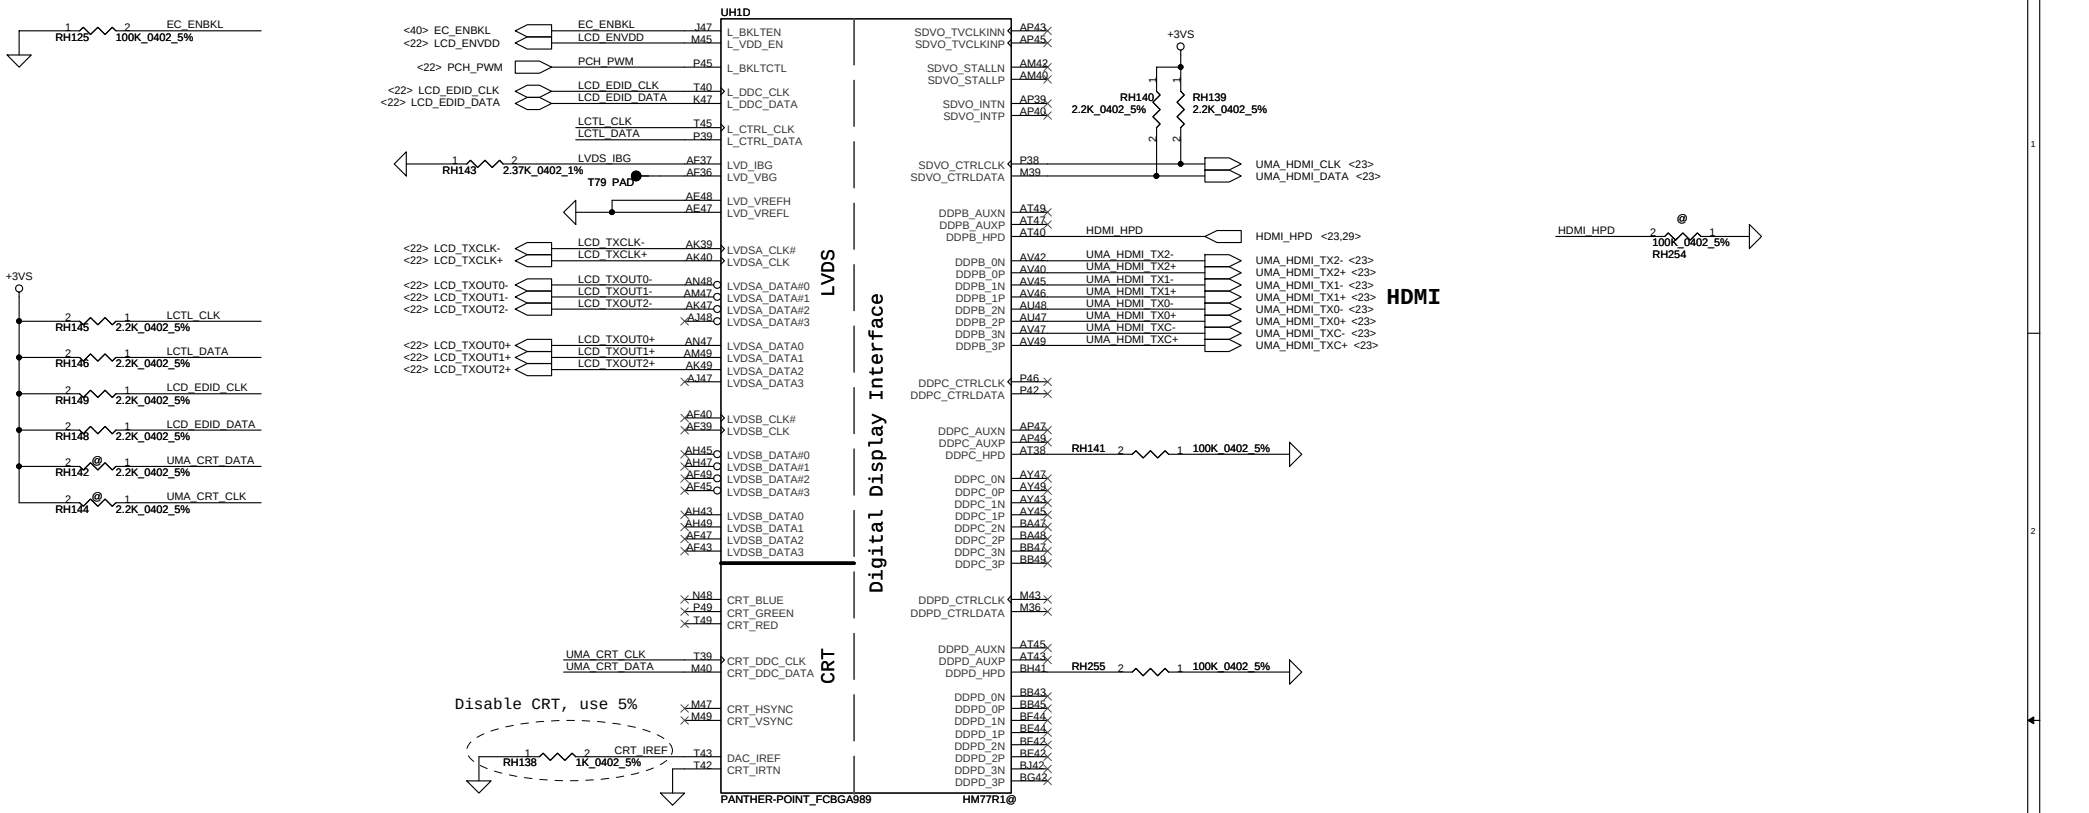

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date 2015/04/19	Title: PCH_CRT/LVDS/HDMI
Size: Custom	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 27 of 53		

For Optimus

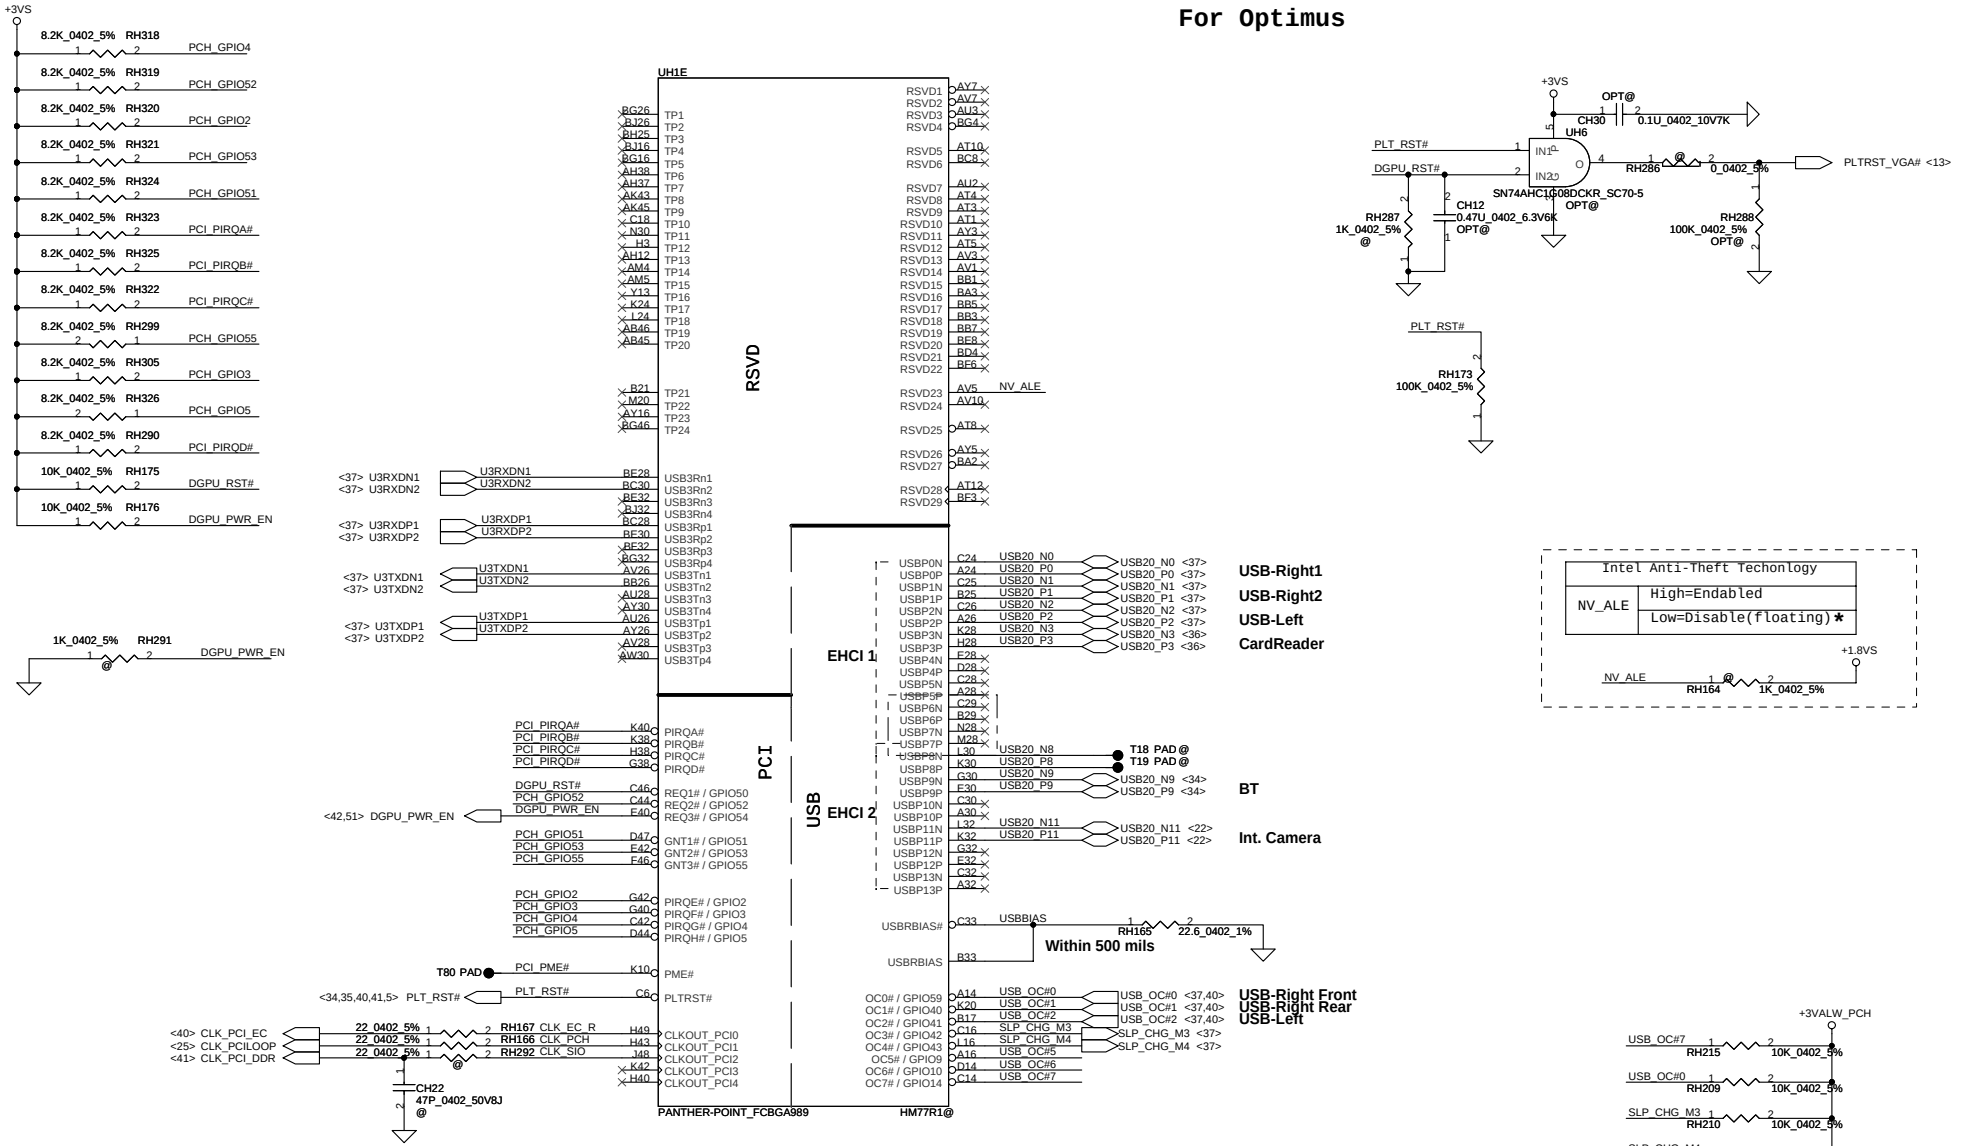

Boot BIOS Strap		
RF_OFF# PCH_GPIO51	PCH_GPIO19	Boot BIOS Loaction
0	0	LPC
0	1	Reserved
1	0	PCI
1	1	SPI *

A16 Swap Override Strap		
WL_OFF#	*	Low= A16 swap override Enable High= A16 swap override Disable

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date 2015/04/19	Title: PCH_PCI/USB/NAND
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.			Size: Custom; Document Number: VCUAA; Rev: 1.0
			Date: Tuesday, October 16, 2012; Sheet 28 of 53

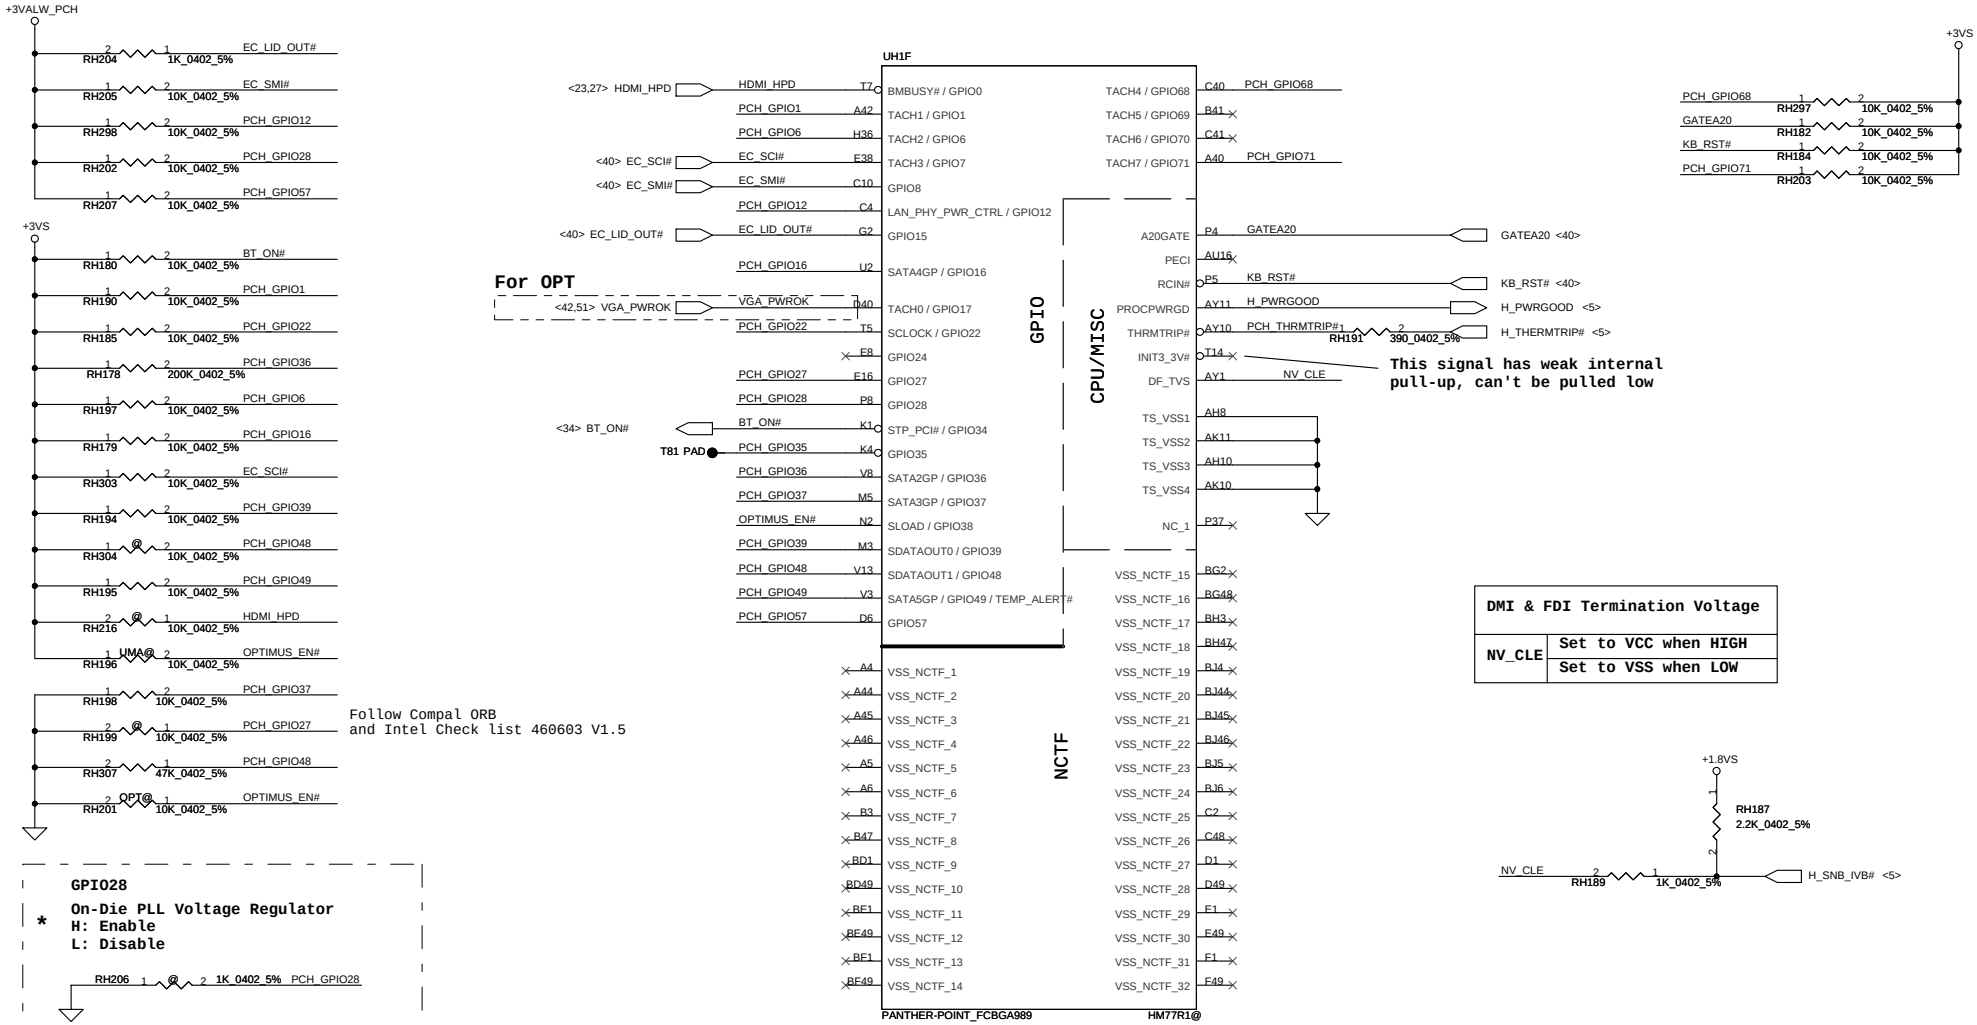

DMI & FDI Termination Voltage	
NV_CLE	Set to VCC when HIGH
	Set to VSS when LOW

OPTIMUS_EN#

OPTIMUS_EN#	H	L
SKU	NonOPT	Optimus

PCH_GPIO57

HDD2_DET#	H	L
SKU	ONE HDD	TWO HDD

PCH_GPIO71

3D_DET#	H	L
SKU	Non3D	3D

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date 2015/04/19	Title: PCH_CPU/GPIO
Size: Custom	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 29 of 53		

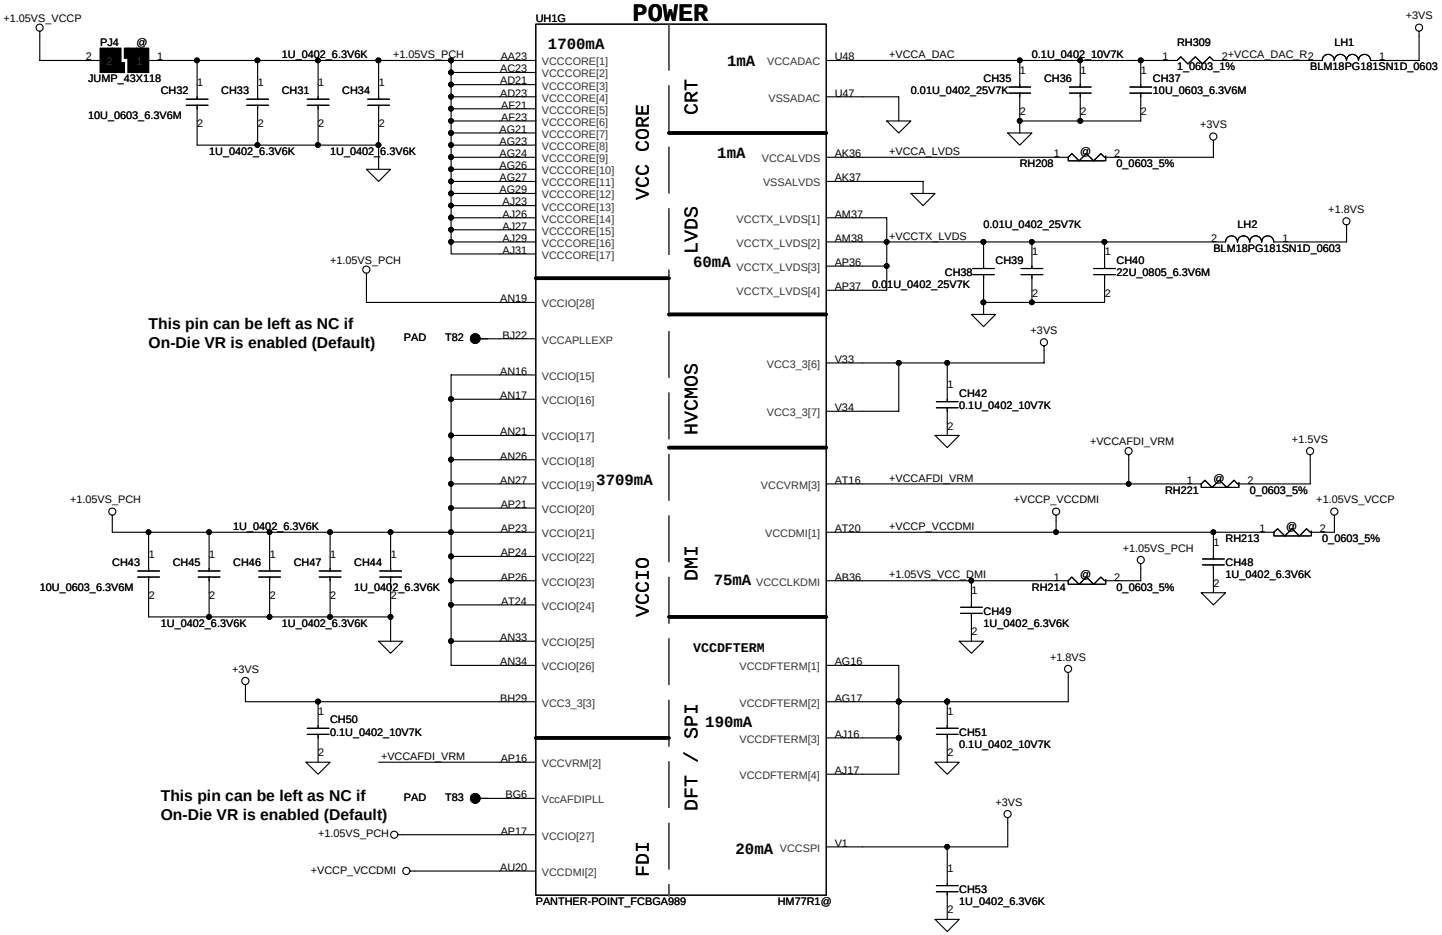

PCH Power Rail Table
Refer to PCH EDS R1.0

Voltage Rail	Voltage	S0 Iccmax Current (A)
V_PROC_IO	1.05	0.001
V5REF	5	0.001
V5REF_Sus	5	0.001
Vcc3_3	3.3	0.228
VccADAC	3.3	0.063
VccADPLLA	1.05	0.08
VccADPLLB	1.05	0.08
VccCore	1.05	1.7
VccDMI	1.1	0.047
VccIO	1.05	3.711
VccASW	1.05	0.903
VccSPI	3.3	0.01
VccDSW	3.3	0.001
VccDFTERM	1.8	0.002
VccRTC	3.3	N/A
VccSus3_3	3.3	0.095
VccSusHDA	3.3	0.01
VccVRM	1.5	0.167
VccCLKDMI	1.05	0.07
VccSSC	1.05	0.095
VccDIFFCLKN	1.05	0.055
VccALVDS	3.3	0.001
VccTX_LVDS	1.8	0.04

+3VALW to +3V_PCH

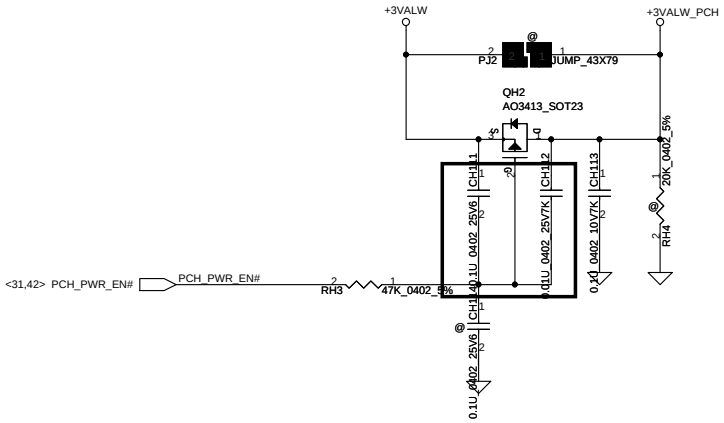

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: ***PCH_POWER-1***

Size: Custom | Document Number: **VCUAA** | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 30 of 53

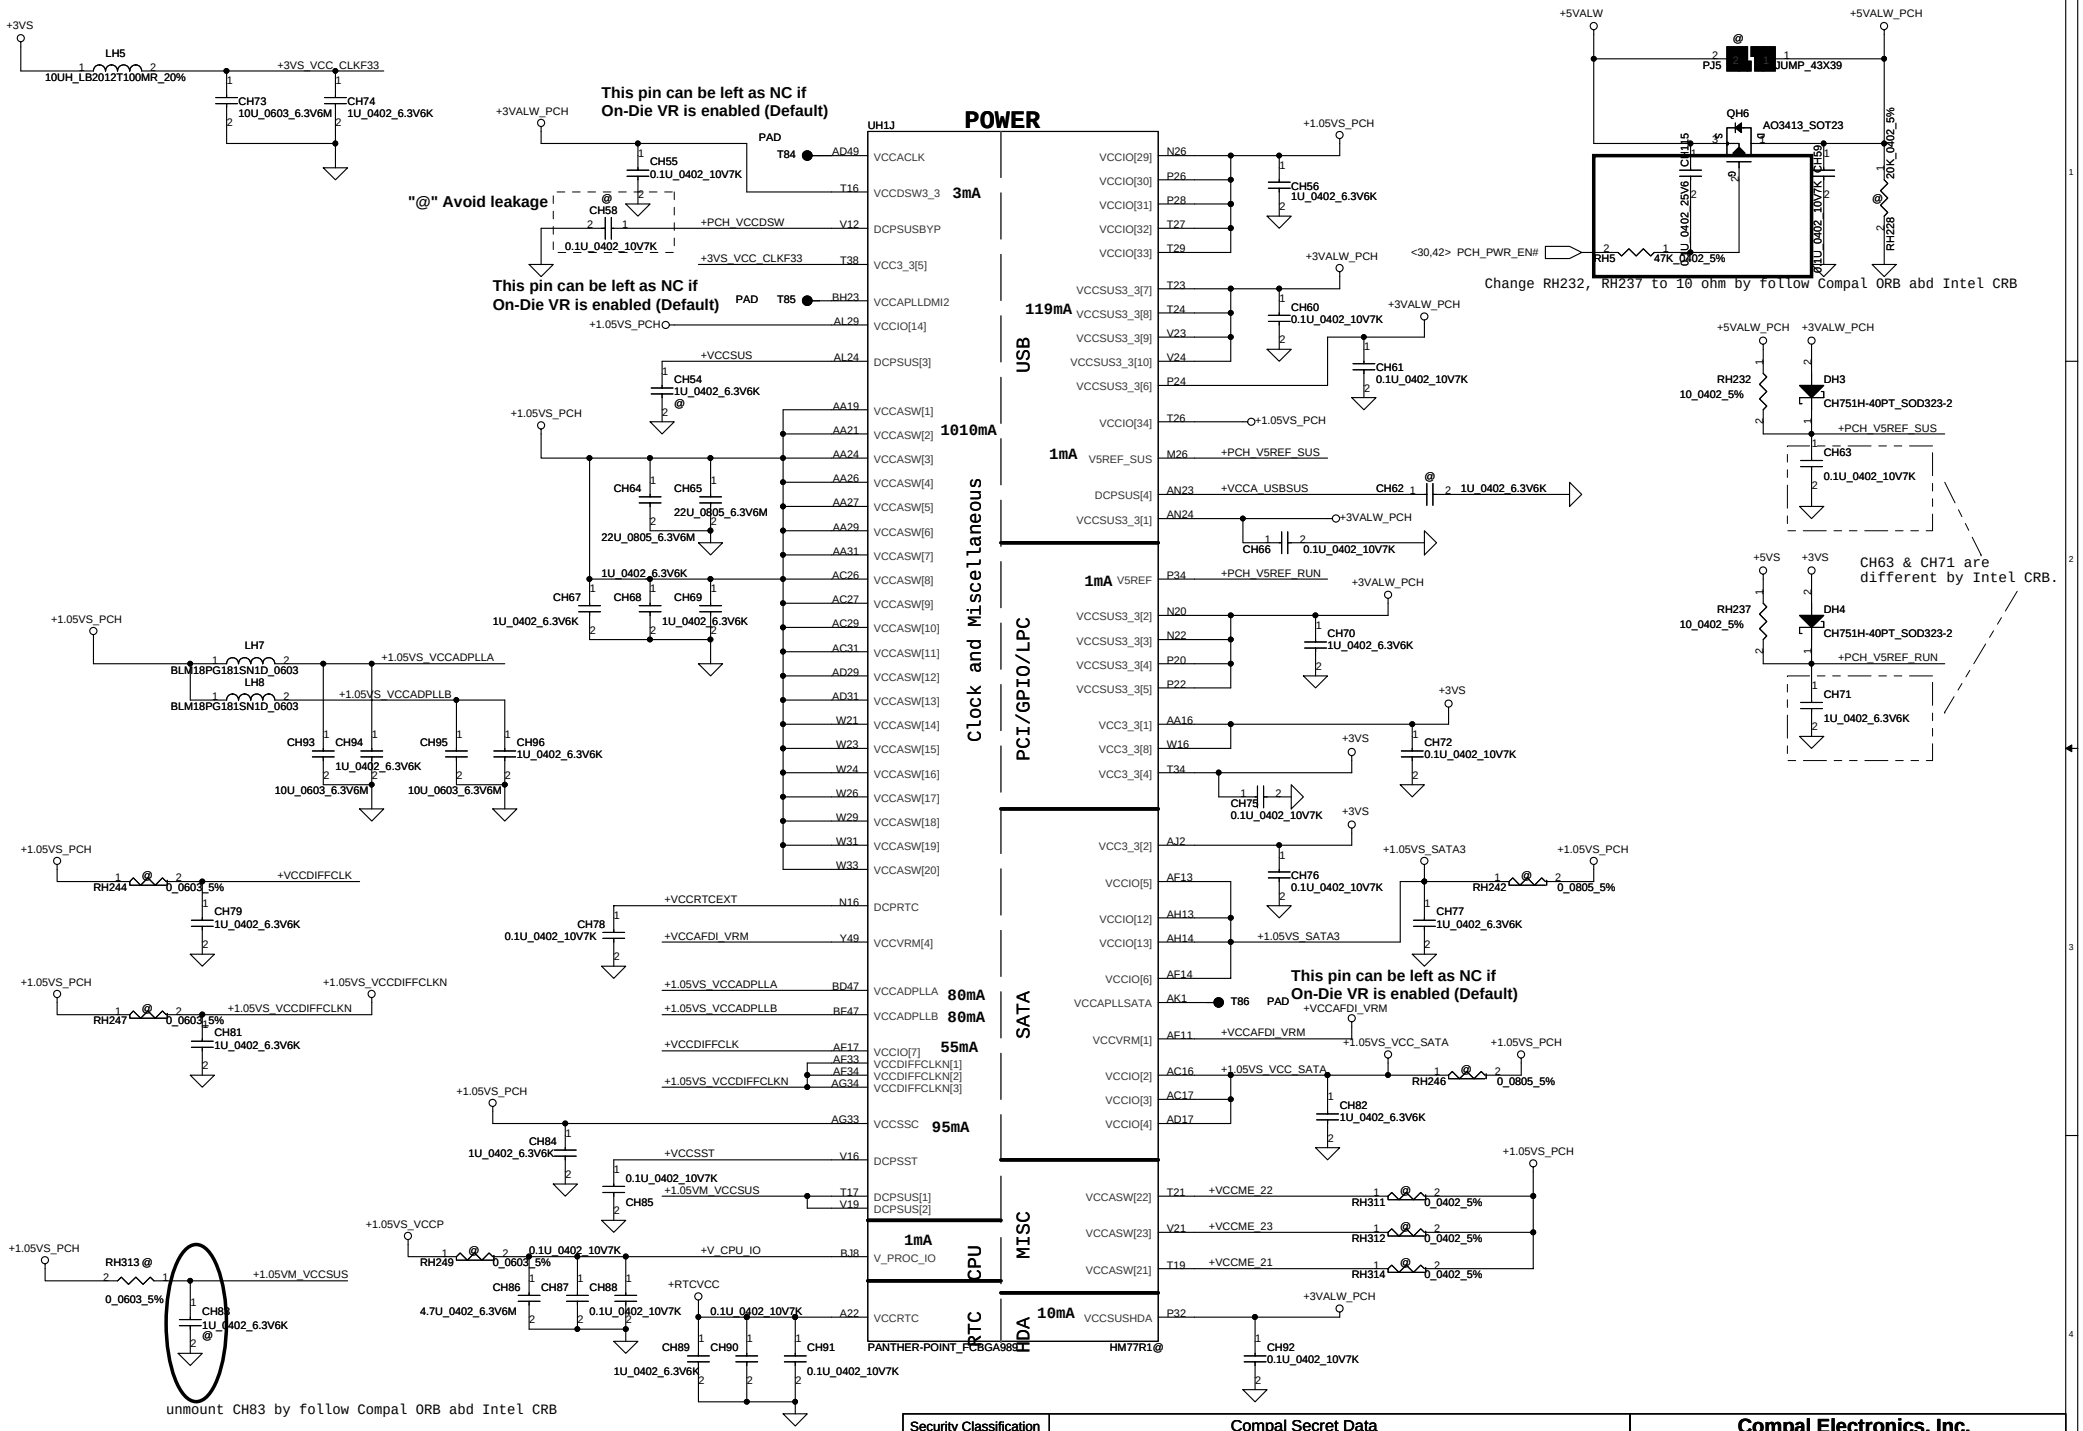

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.			
Title: PCH_POWER-2			
Size: Custom	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 31 of 53		

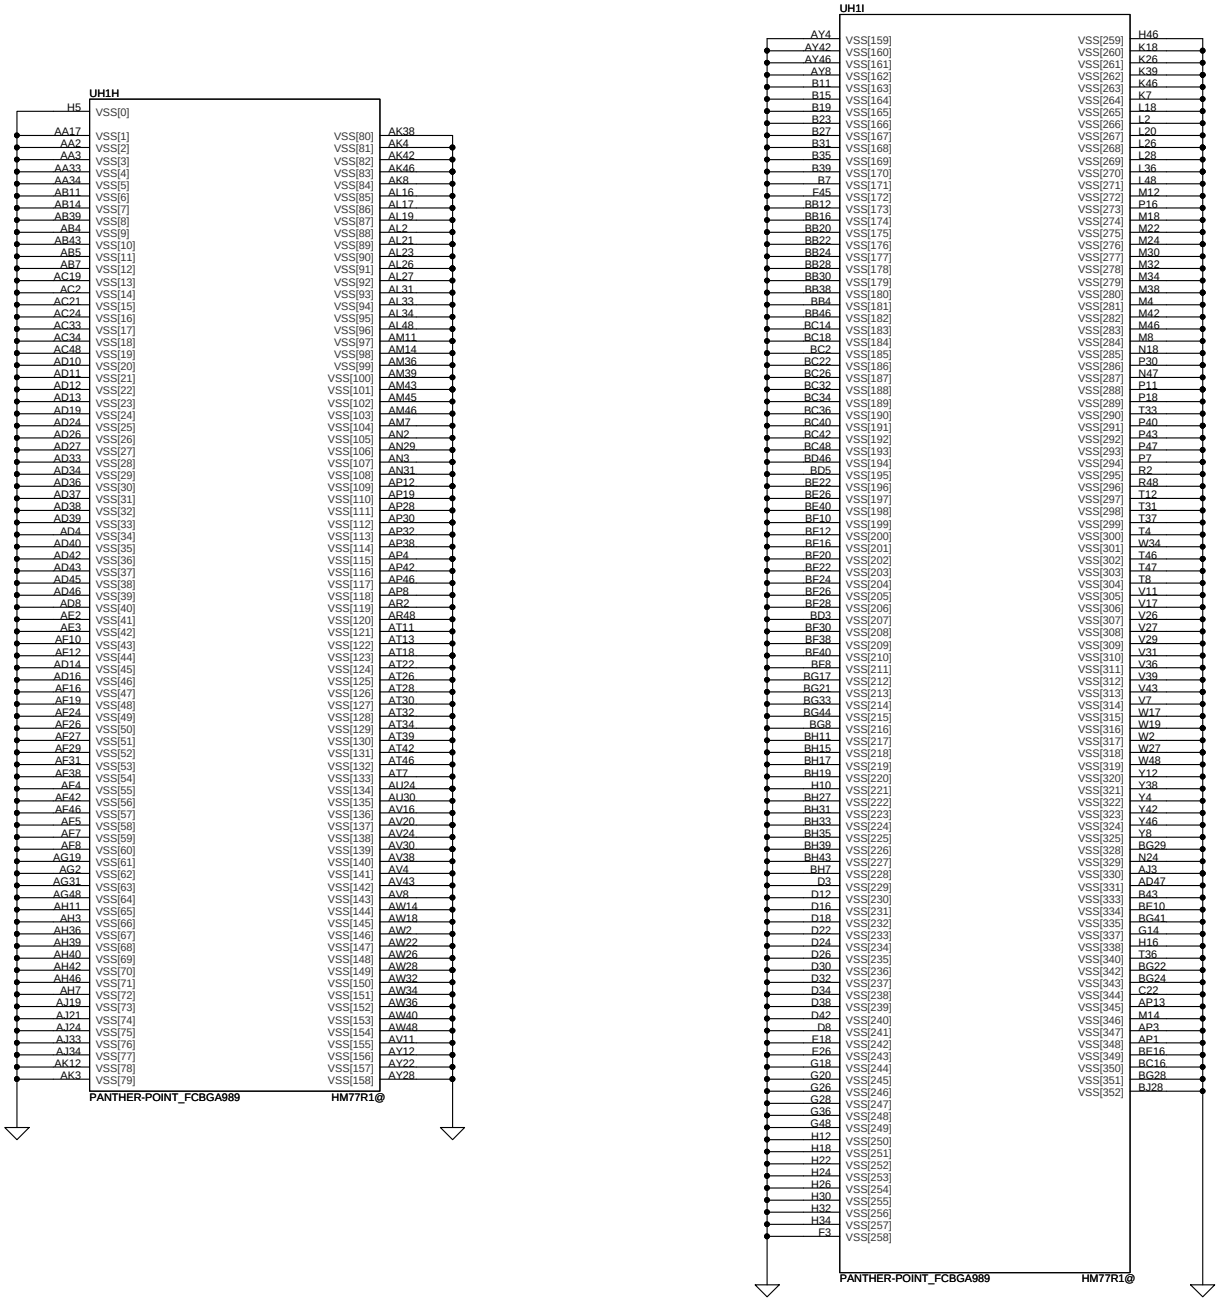

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date 2015/04/19	Title: PCH_GND
			Size: Custom; Document Number: VCUAA; Rev: 1.0
			Date: Tuesday, October 16, 2012; Sheet 32 of 53

SATA HDD Conn.

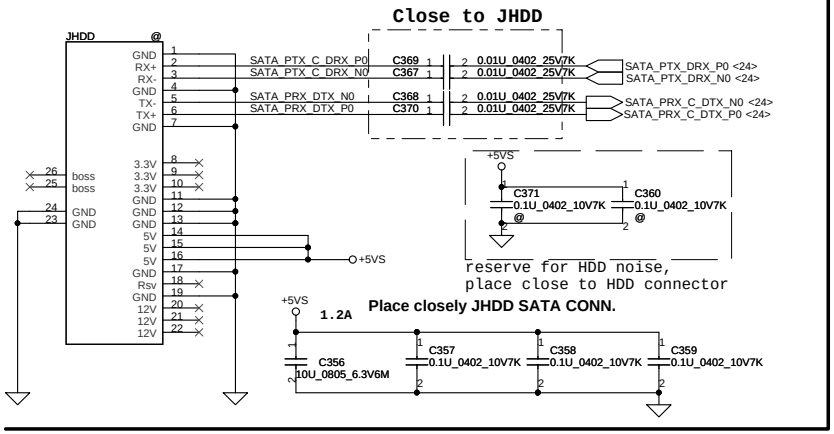

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: **HDD**

Size: | Document Number: **VCUAA** | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 33 of 53

Slot 1 Half PCIe Mini Card-WLAN

PJ6 @JUMP_43X79

Short for WIFI

PJ9 @JUMP_43X79

reserve for BT issue

40 mils

For SED

For SED

WLAN&BT Combo module circuits

	BT on module Enable	BT on module Disable
BT_CTRL	H	L
BT_ON#	L	H

QM1A 2N7002DW-T/R7_SOT363-6

QM1B 2N7002DW-T/R7_SOT363-6

<29> BT_ON#

<40> EC_BT_ON#

<42,5,9> SUSP

JWLAN @

BELLW_80060-1021

WLAN/ WiFi

BT

Debug card using

For isolate Intel Rainbow Peak and Compal Debug Card.

Slot 2 Full PCIe Mini Card- mSATA

JMSATA @

BELLW_80060-1021

For RF

120 mils

For SED

EMI request 8/7

SATA_PRX_DTX_P1 / SATA_PRX_DTX_N1 / SATA_PTX_C_DRX_N1 / SATA_PTX_C_DRX_P1

CM18 47P_0402_50V8J; CM19 @; CM4 0.1U_0402_10V7K; CM5 0.01U_0402_25V7K; CM6 4.7U_0805_10V4Z; CM20 47P_0402_50V8J @

CM21 0.01U_0402_25V7K SATA_PRX_C_DTX_N1 <24>

CM22 0.01U_0402_25V7K SATA_PRX_C_DTX_P1 <24>

CM23 0.01U_0402_25V7K SATA_PTX_DRX_N1 <24>

CM24 0.01U_0402_25V7K SATA_PTX_DRX_P1 <24>

UCL1 SLG3NB300VTR_TQFN16_2X3

UCL1 SLG3NB244VTR_TQFN16_2X3 UMA@

UCL1 SLG3NB304VTR_TQFN16_2X3 G304@

22 ohm for NV chip

EMI request 11/06

Reserved for Swing Level adjustment (Close GCLK side)

	OPT	UMA
GCLK	300(default) SA00005RS00	244 SA000057I00
	304(low power)	

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: PCIe-WLAN/mSATA/GCLK

Size: | Document Number: VCUAA | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 34 of 53

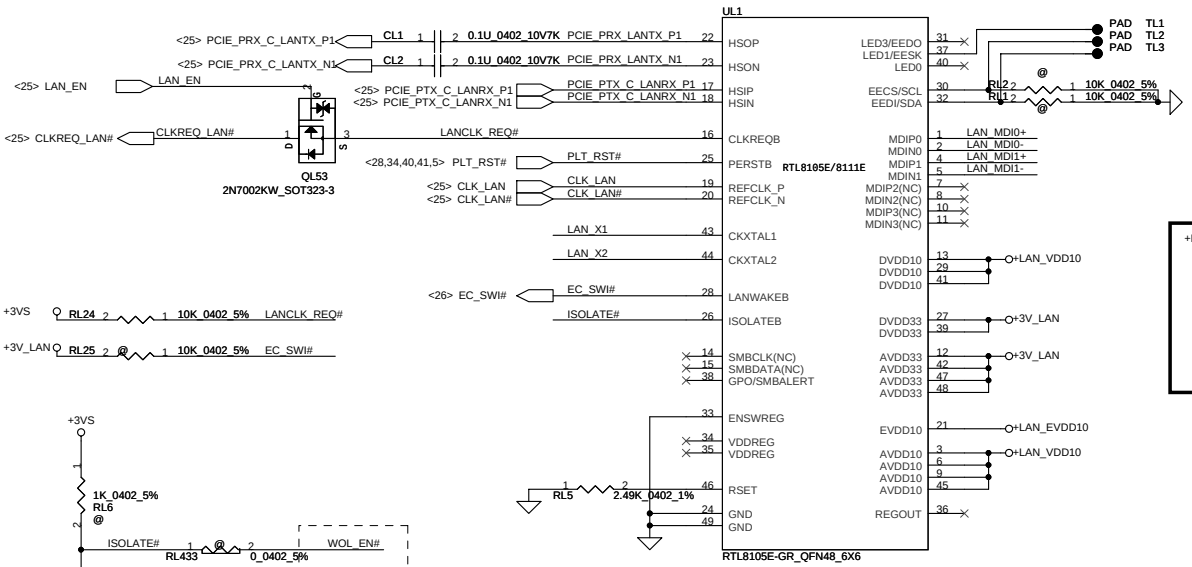

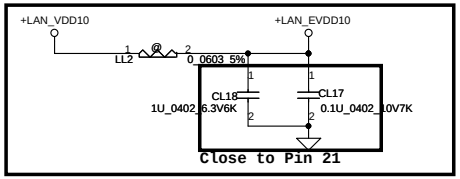



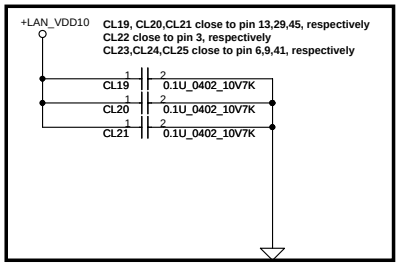

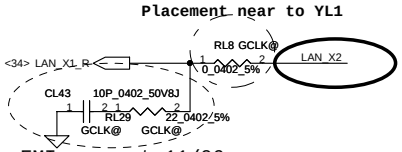

	Sx Enable Wake up	Sx Disable Wake up	S0
WOL_EN#	LOW	HIGH	HIGH

	RTL8105E	RTL8111E/F
Pin14	NC	NC
Pin15	NC	10K ohm PD
Pin38	NC	1K ohm PH

	8105E-VL/VD 8111F/F-VB PWM Mode	8105E-VL/VD LDO Mode
RL4	0 ohm (Pull High)	NC
RL23	NC	0 ohm (Pull Down)

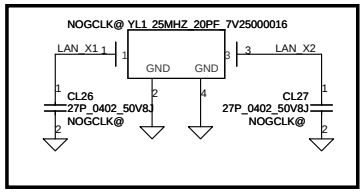

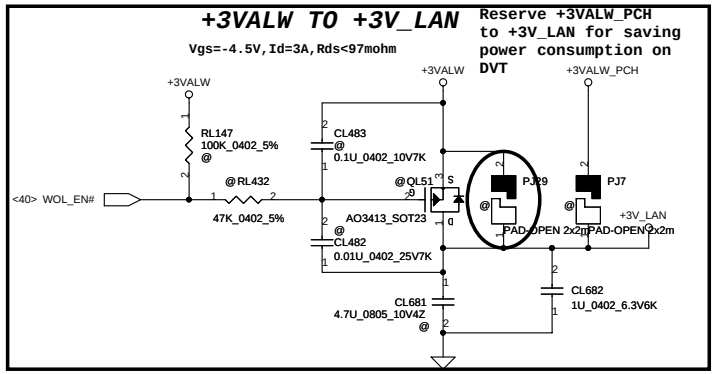

+3V_LAN rising time (10%~90%) need > 1ms and <100ms.

LAN	WOL	LAN_EN S0	LAN_EN Sx	ISOLATEB S0	ISOLATEB Sx
0	0	0	0	1	1
0	1	0	0	1	1
1	0	1	1	1	1
1	1	1	1	1	0*

*
S3: after SUSP# assert low over 100ms
S4/S5: after SYSON assert low over 100ms

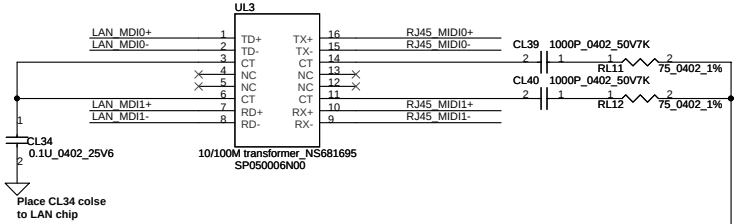

LAN Conn.

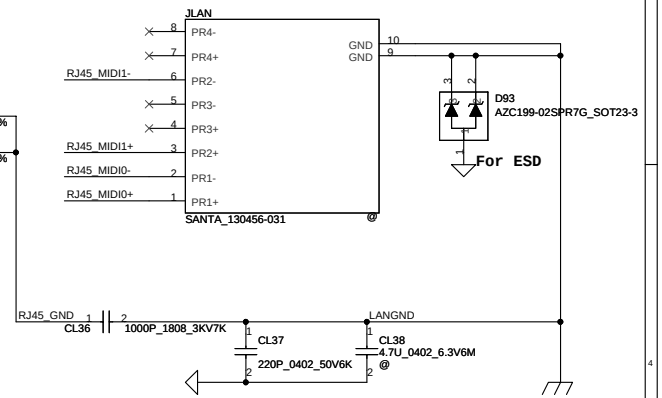

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: **PCIe-LAN-RTL8105E**

Size: Custom | Document Number: **VCUAA** | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 35 of 53

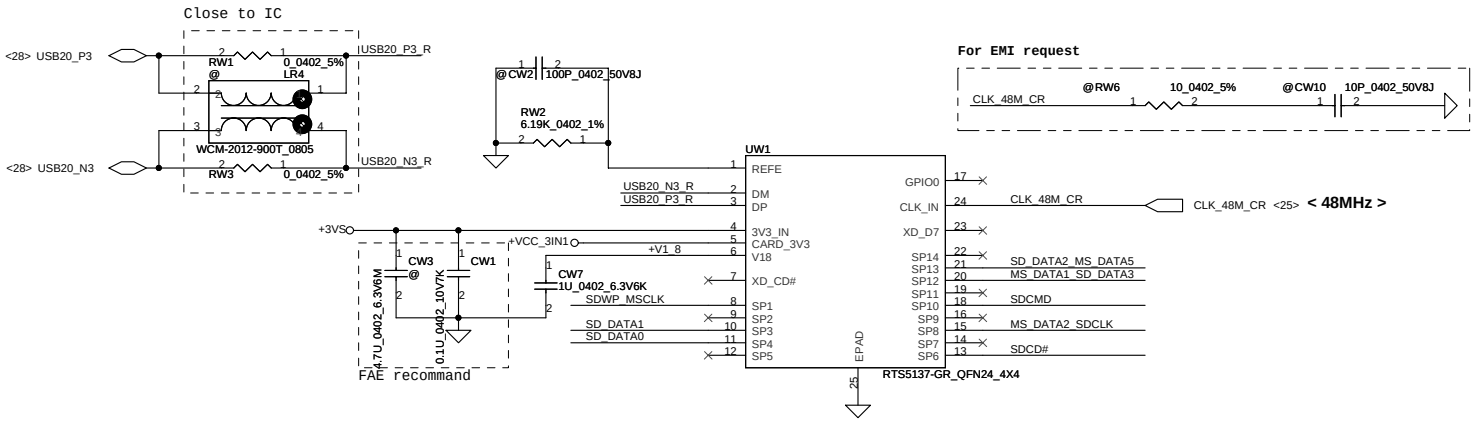

< 2 in 1 Card Reader >

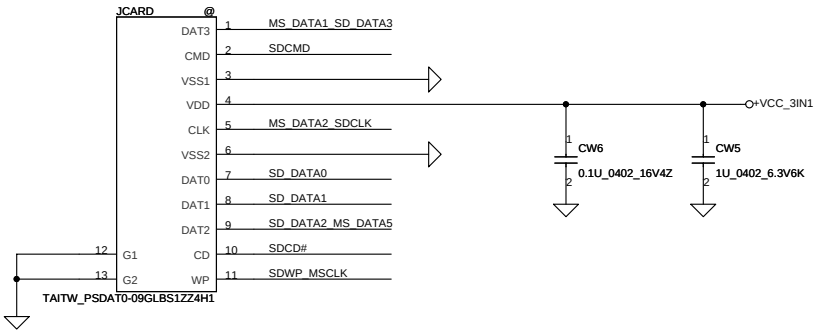



Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.			
Title: USB-CardReader RTS5137			
Size: Custom	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 36 of 53		

Left USB 2.0 x 1

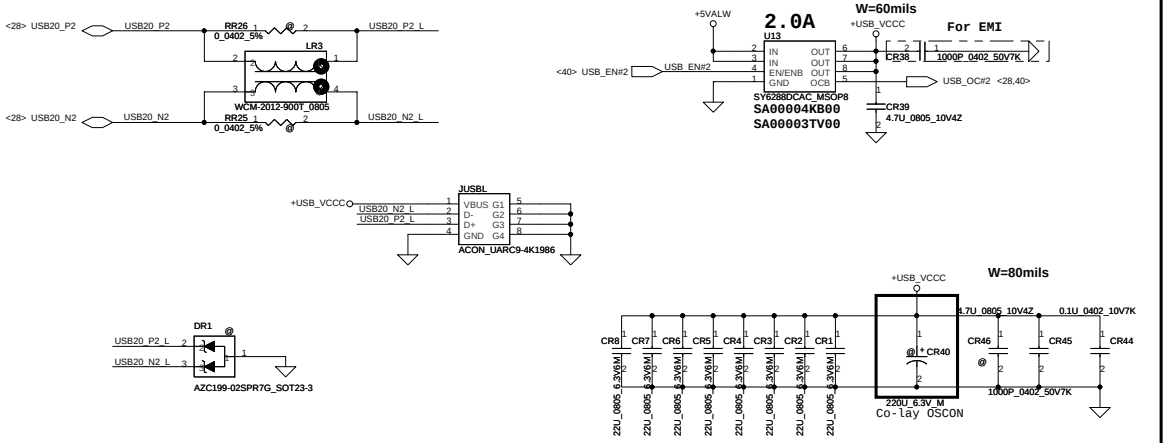

Right side USB 3.0 x 2/ Sleep&Charge

USB Sleep & Charge Auto-Mode/Mode3

MAX14600 & MAX14617			
CB0 SLP_CHG_M4	CB1 SLP_CHG_M3	CB2 (14617 only)	STATUS
0	0	0	AUTO MODE
0	1	0	Force Dedicated charger mode (MODE3)
1	0	0	Pass-Through (USB) Mode: Connect DP/DM to TDP/TDM
1	1	0	Pass-Through (USB) Mode with CDP Emulation: Auto Connect DP/DM to TDP/TDM depending on CDP status
X	X	1	Force Apple 2A Charger Mode: Apple 2A resistor dividers

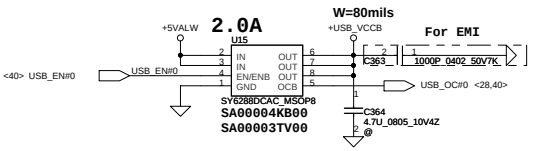



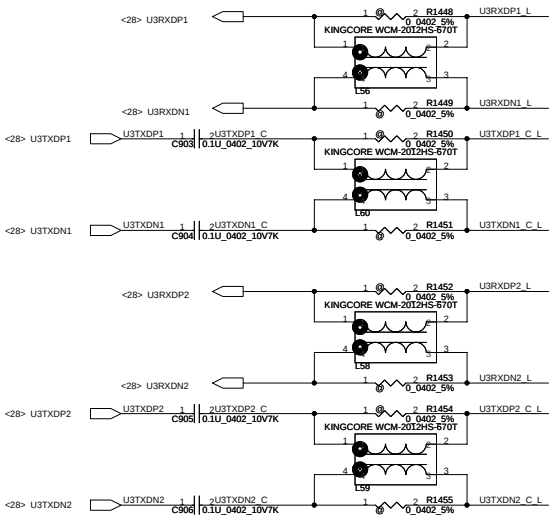





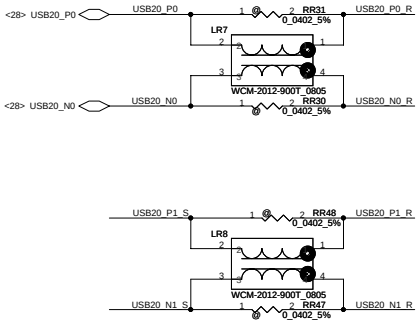

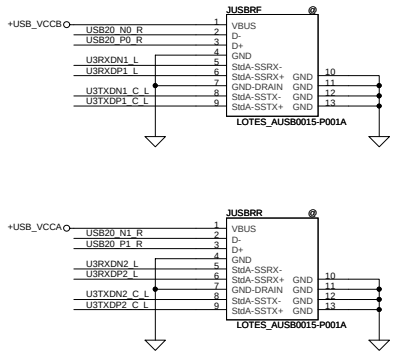









Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.	
Title	LUSB/RUSB/S&C
Size: Custom	Document Number: VCUAA
Rev	1.0
Date: Tuesday, October 16, 2012	Sheet 37 of 53

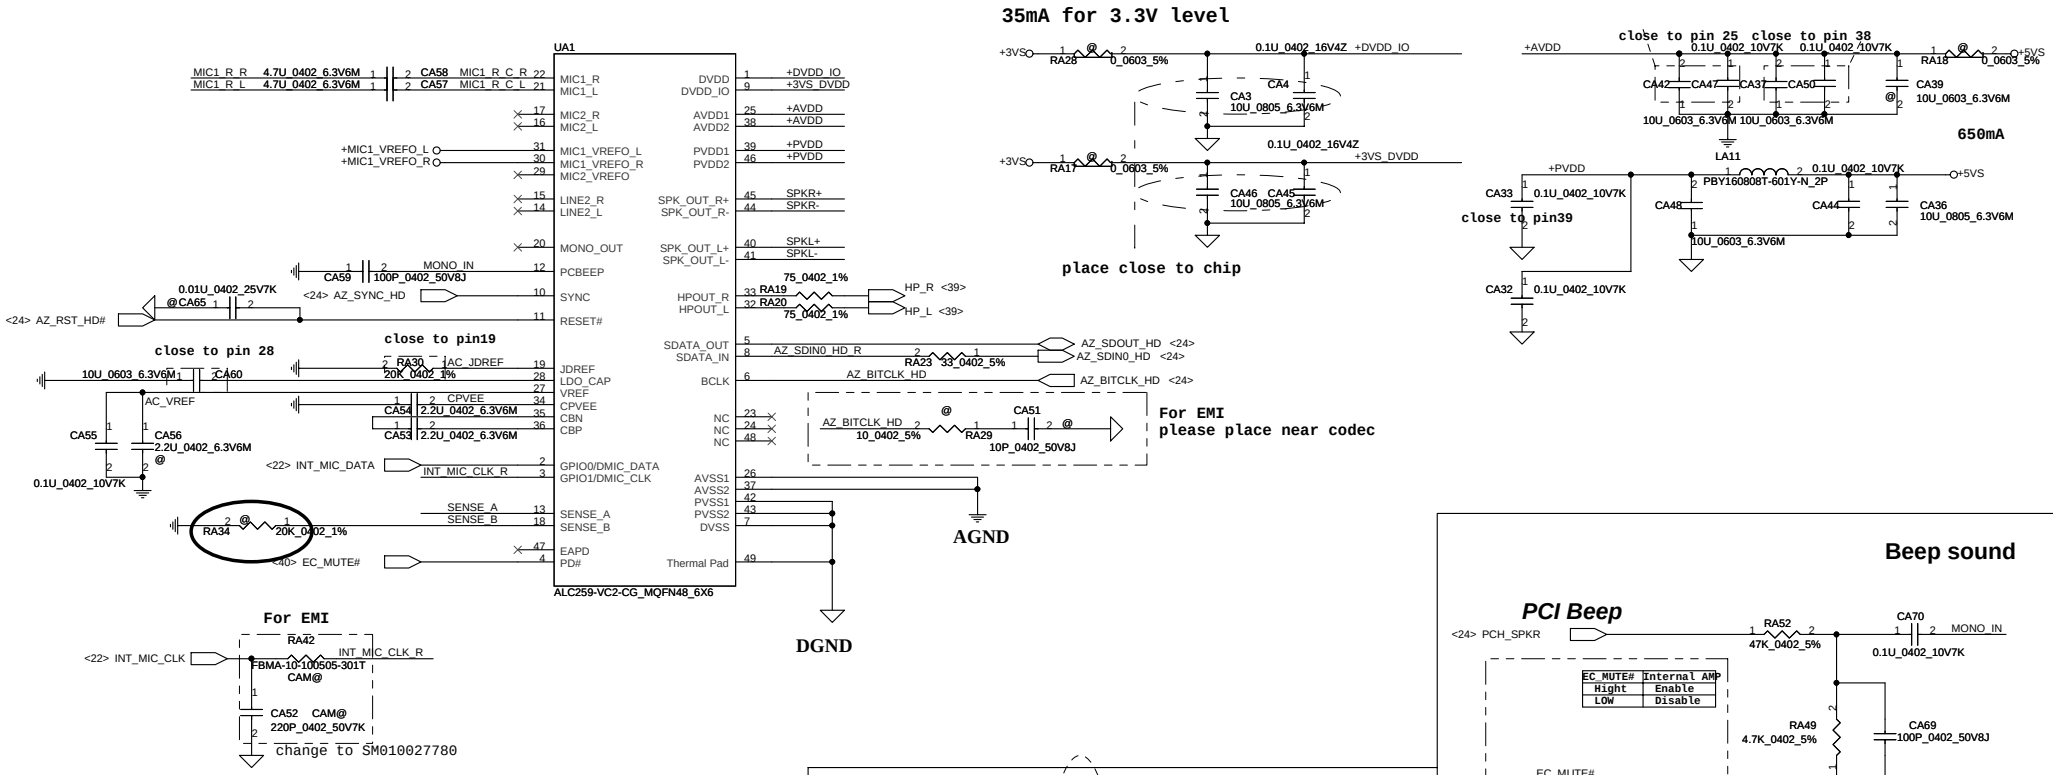

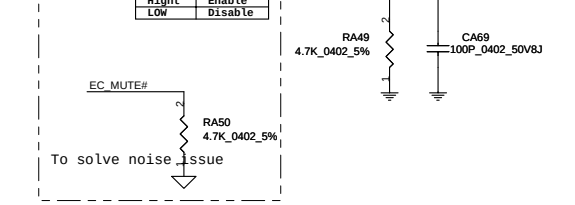

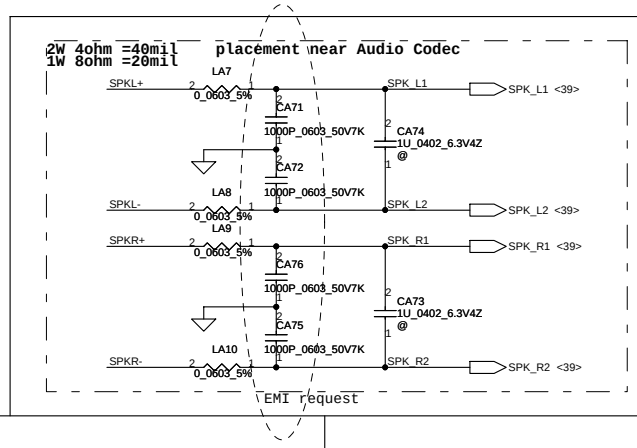



Sense Pin	Impedance	Codec Signals	Function
SENSE A	39.2K	PORT-I (PIN 32, 33)	Headphone out
	20K	PORT-B (PIN 21, 22)	Ext. MIC
	10K	PORT-C (PIN 23, 24)	
	5.1K	(PIN 48)	
SENSE B	39.2K	PORT-E (PIN 14, 15)	
	20K	PORT-F (PIN 16, 17)	
	10K	PORT-H (PIN 20)	

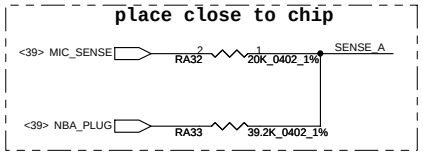



Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.	
Title	HDA-ALC259-VC
Size: Custom	Document Number: Rev
Date: Tuesday, October 16, 2012	Sheet 38 of 53

HeadPhone/LINE OUT JACK

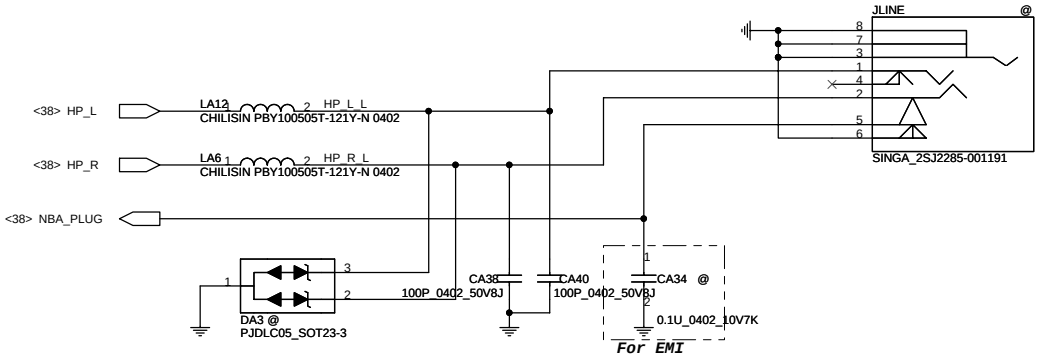

EXT.MIC/LINE IN JACK

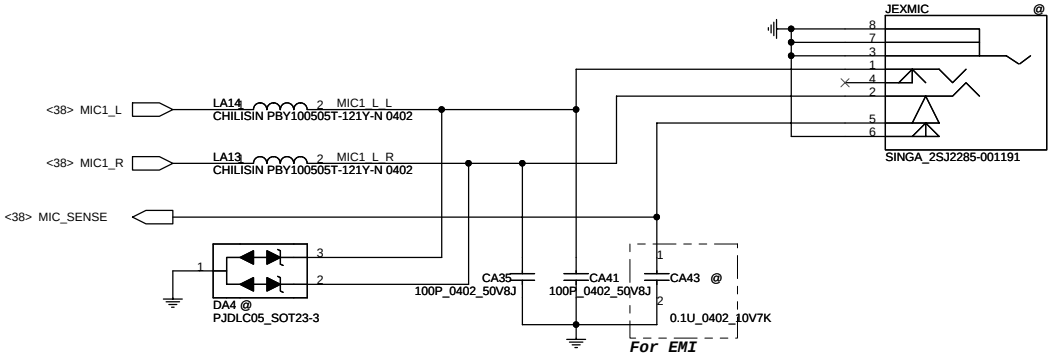

SPK CONN.

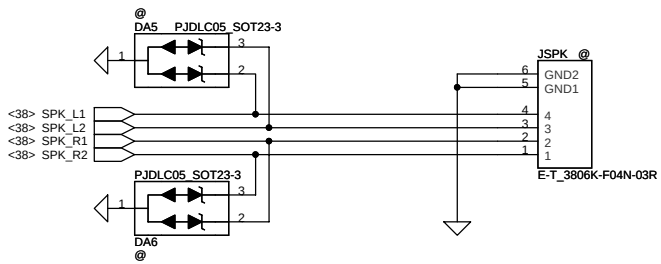

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: AUDIO CONN

Size | Document Number | Rev 1.0

Date: Tuesday, October 16, 2012 | Sheet 39 of 53

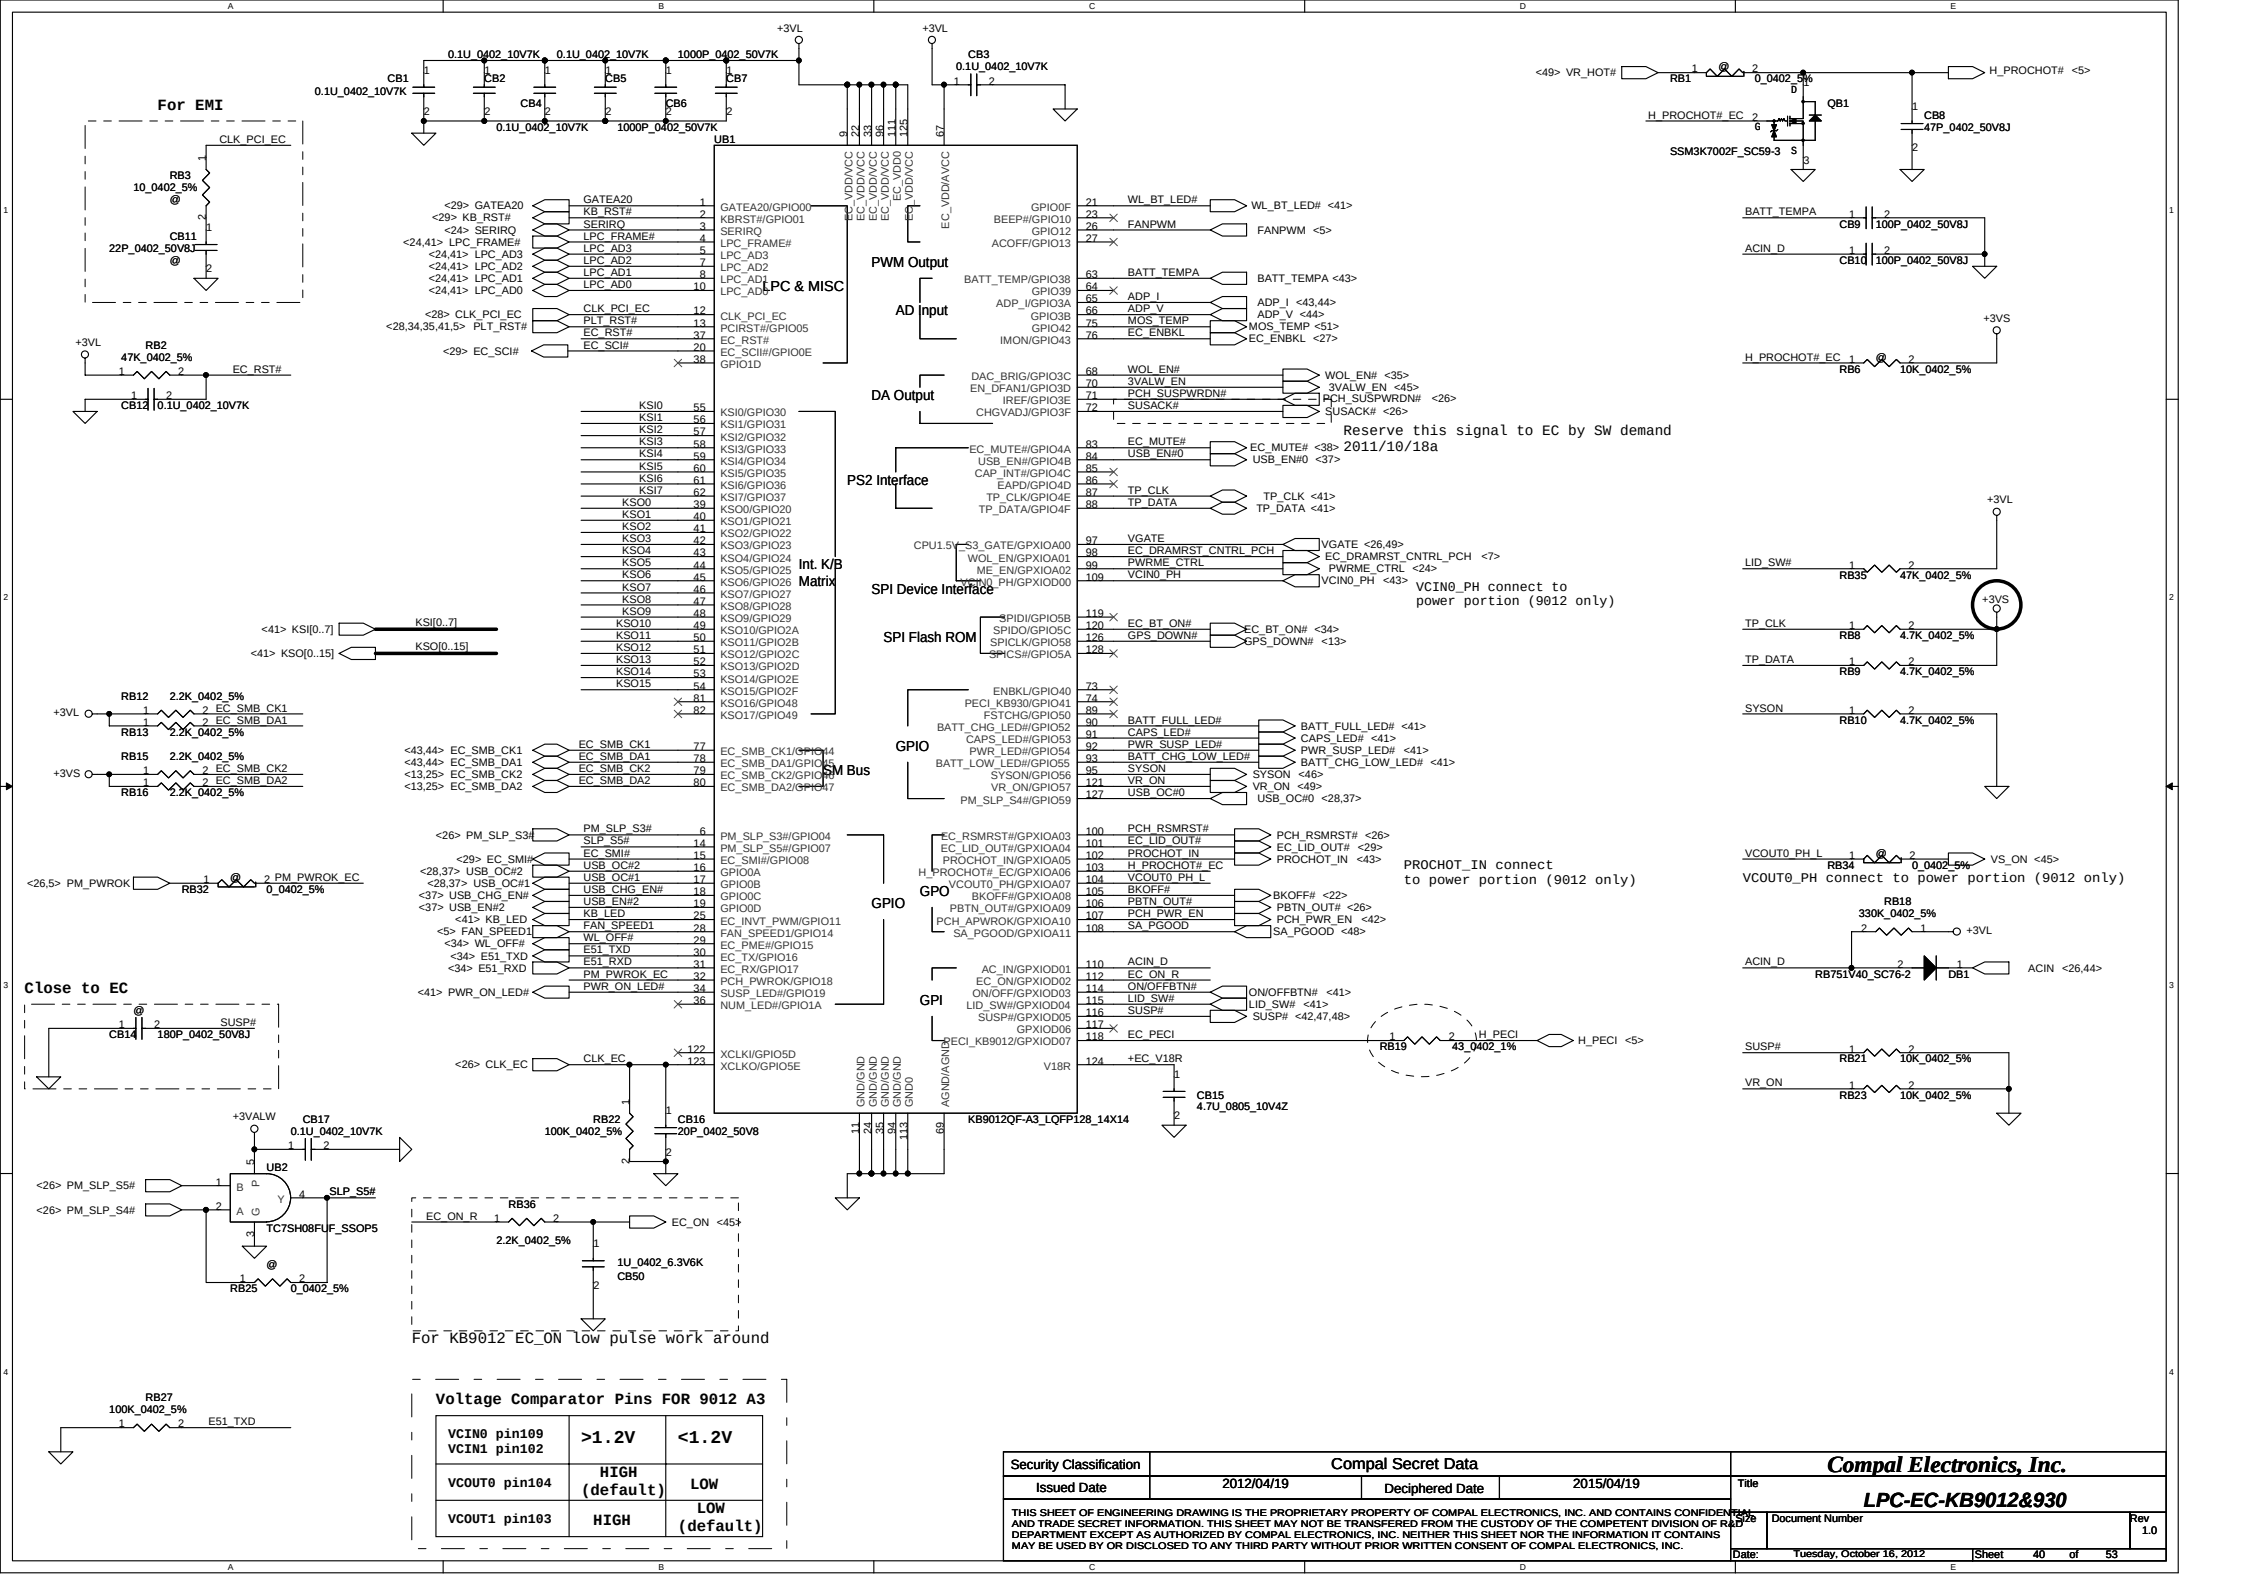
For EMI
CLK_PCI_EC
RB3 10_0402_5%
CB11 22P_0402_50V8J
UB1
KB9012QF-A3_LQFP128_14X14
LPC & MISC
PWM Output
AD Input
DA Output
PS2 Interface
Int. K/B Matrix
SPI Device Interface
SPI Flash ROM
SM Bus
GPIO
GPO
GPI
Reserve this signal to EC by SW demand 2011/10/18a
VCIN0_PH connect to power portion (9012 only)
PROCHOT_IN connect to power portion (9012 only)
VCOUT0_PH connect to power portion (9012 only)
Close to EC
For KB9012 EC_ON low pulse work around
Voltage Comparator Pins FOR 9012 A3
VCIN0 pin109 VCIN1 pin102 | >1.2V | <1.2V
VCOUT0 pin104 | HIGH (default) | LOW
VCOUT1 pin103 | HIGH | LOW (default)
Security Classification | Compal Secret Data
Issued Date | 2012/04/19 | Deciphered Date | 2015/04/19
Compal Electronics, Inc.
LPC-EC-KB9012&930
Size | Document Number | Rev 1.0
Date: Tuesday, October 16, 2012 | Sheet 40 of 53

Power Button

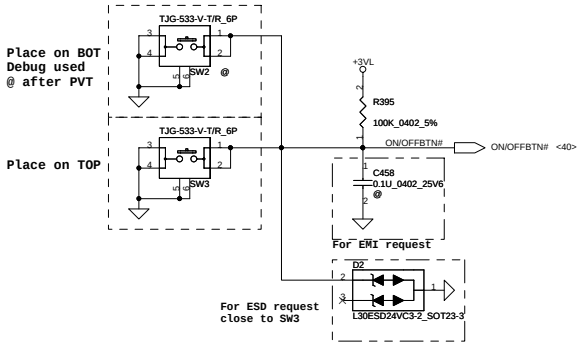

LPC Debug Port

Place the PAD under DDR DIMM.

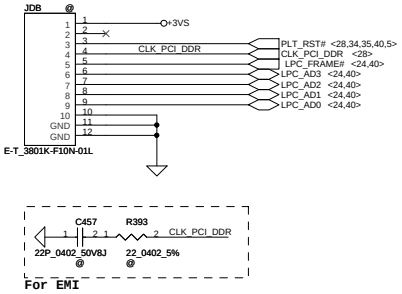

LED/LID/TP SMALL BOARD

Swap pin assign to avoid DDR interference





please place near JTP

Keyboard LED

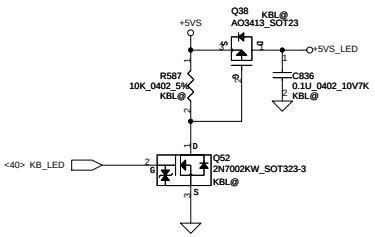

NEW KEYBOARD CONN.

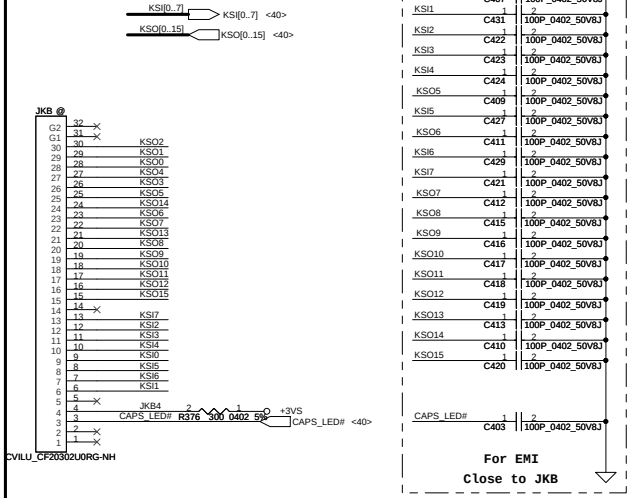

Screw Hole

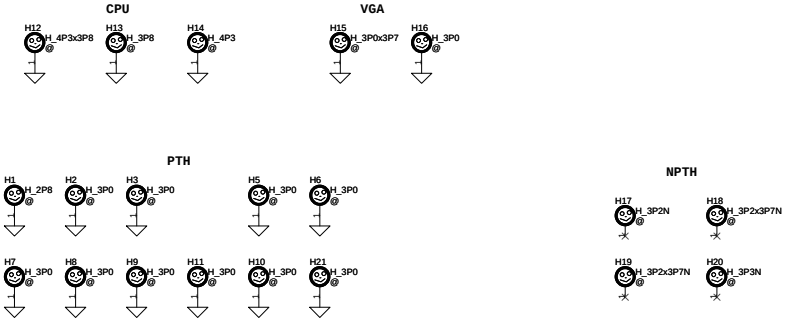

PCB Fedical Mark PAD



ISPD

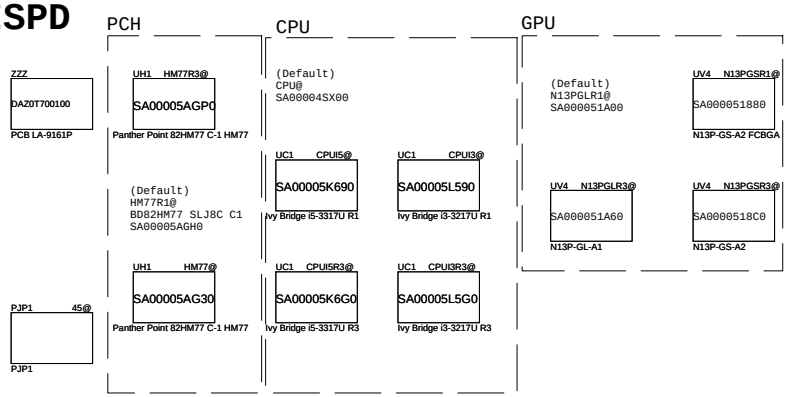

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date 2015/04/19	Title: TP/ISPD/KB/Screw

Size	Document Number: VCUAA		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 41 of 53		

+3VALW TO +3VS

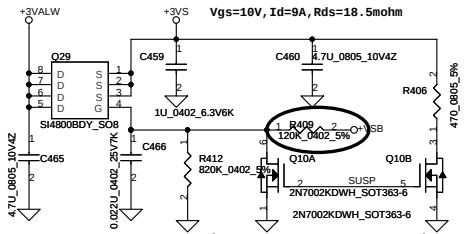

change R409 to 120k 5%

+5VALW TO +5VS

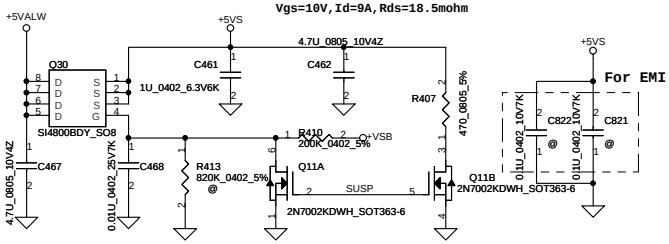

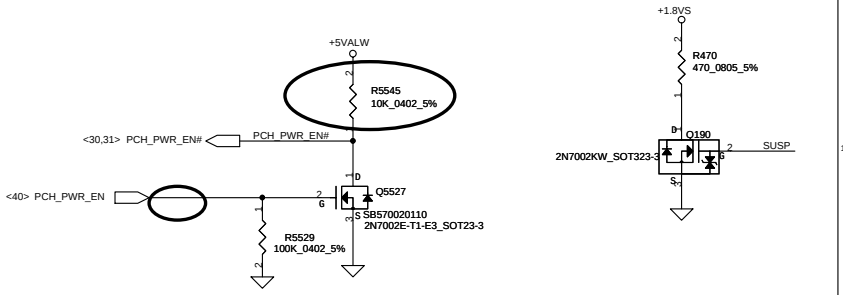

+1.5V to +VRAM_1.5VS

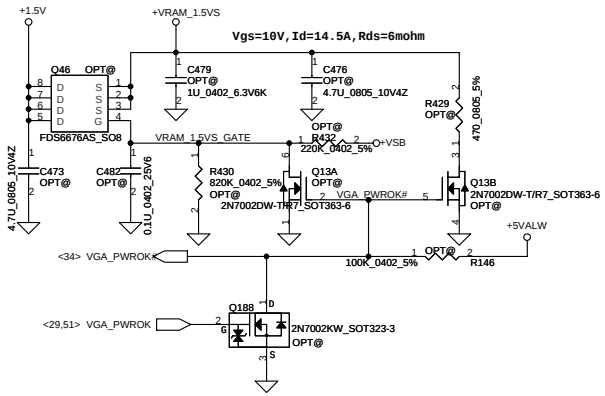

For S3 CPU Power Saving



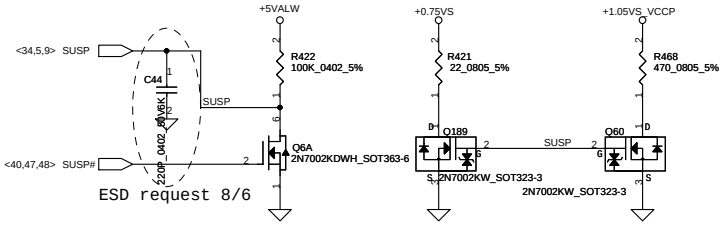

ESD request 8/6

Reserve CAP to avoid Power Noise

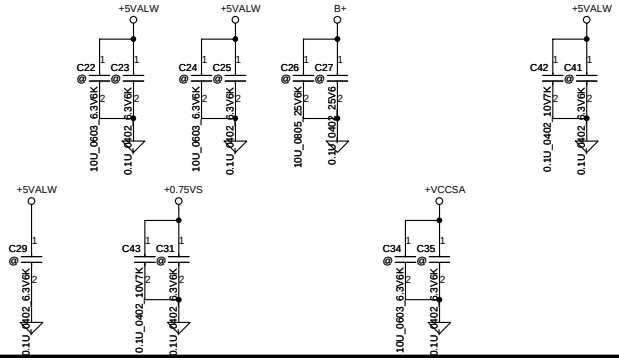

ESD Cap., please keep original location

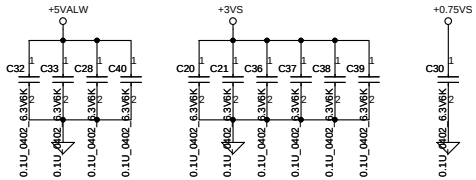

EMI request



+1.05VS_VCCP to +1.05VS_DGPU

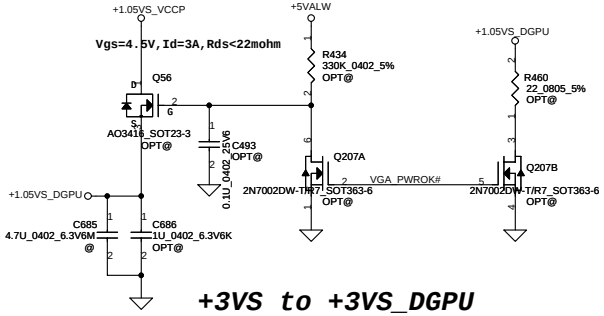

+3VS to +3VS_DGPU

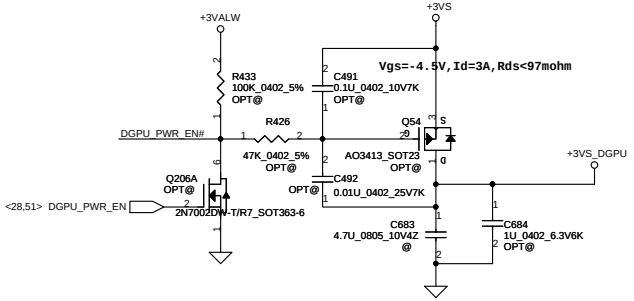

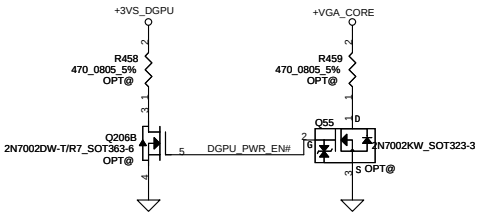

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: **DC-DC INTERFACE**

Size | Document Number: **VCUAA** | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 42 of 53

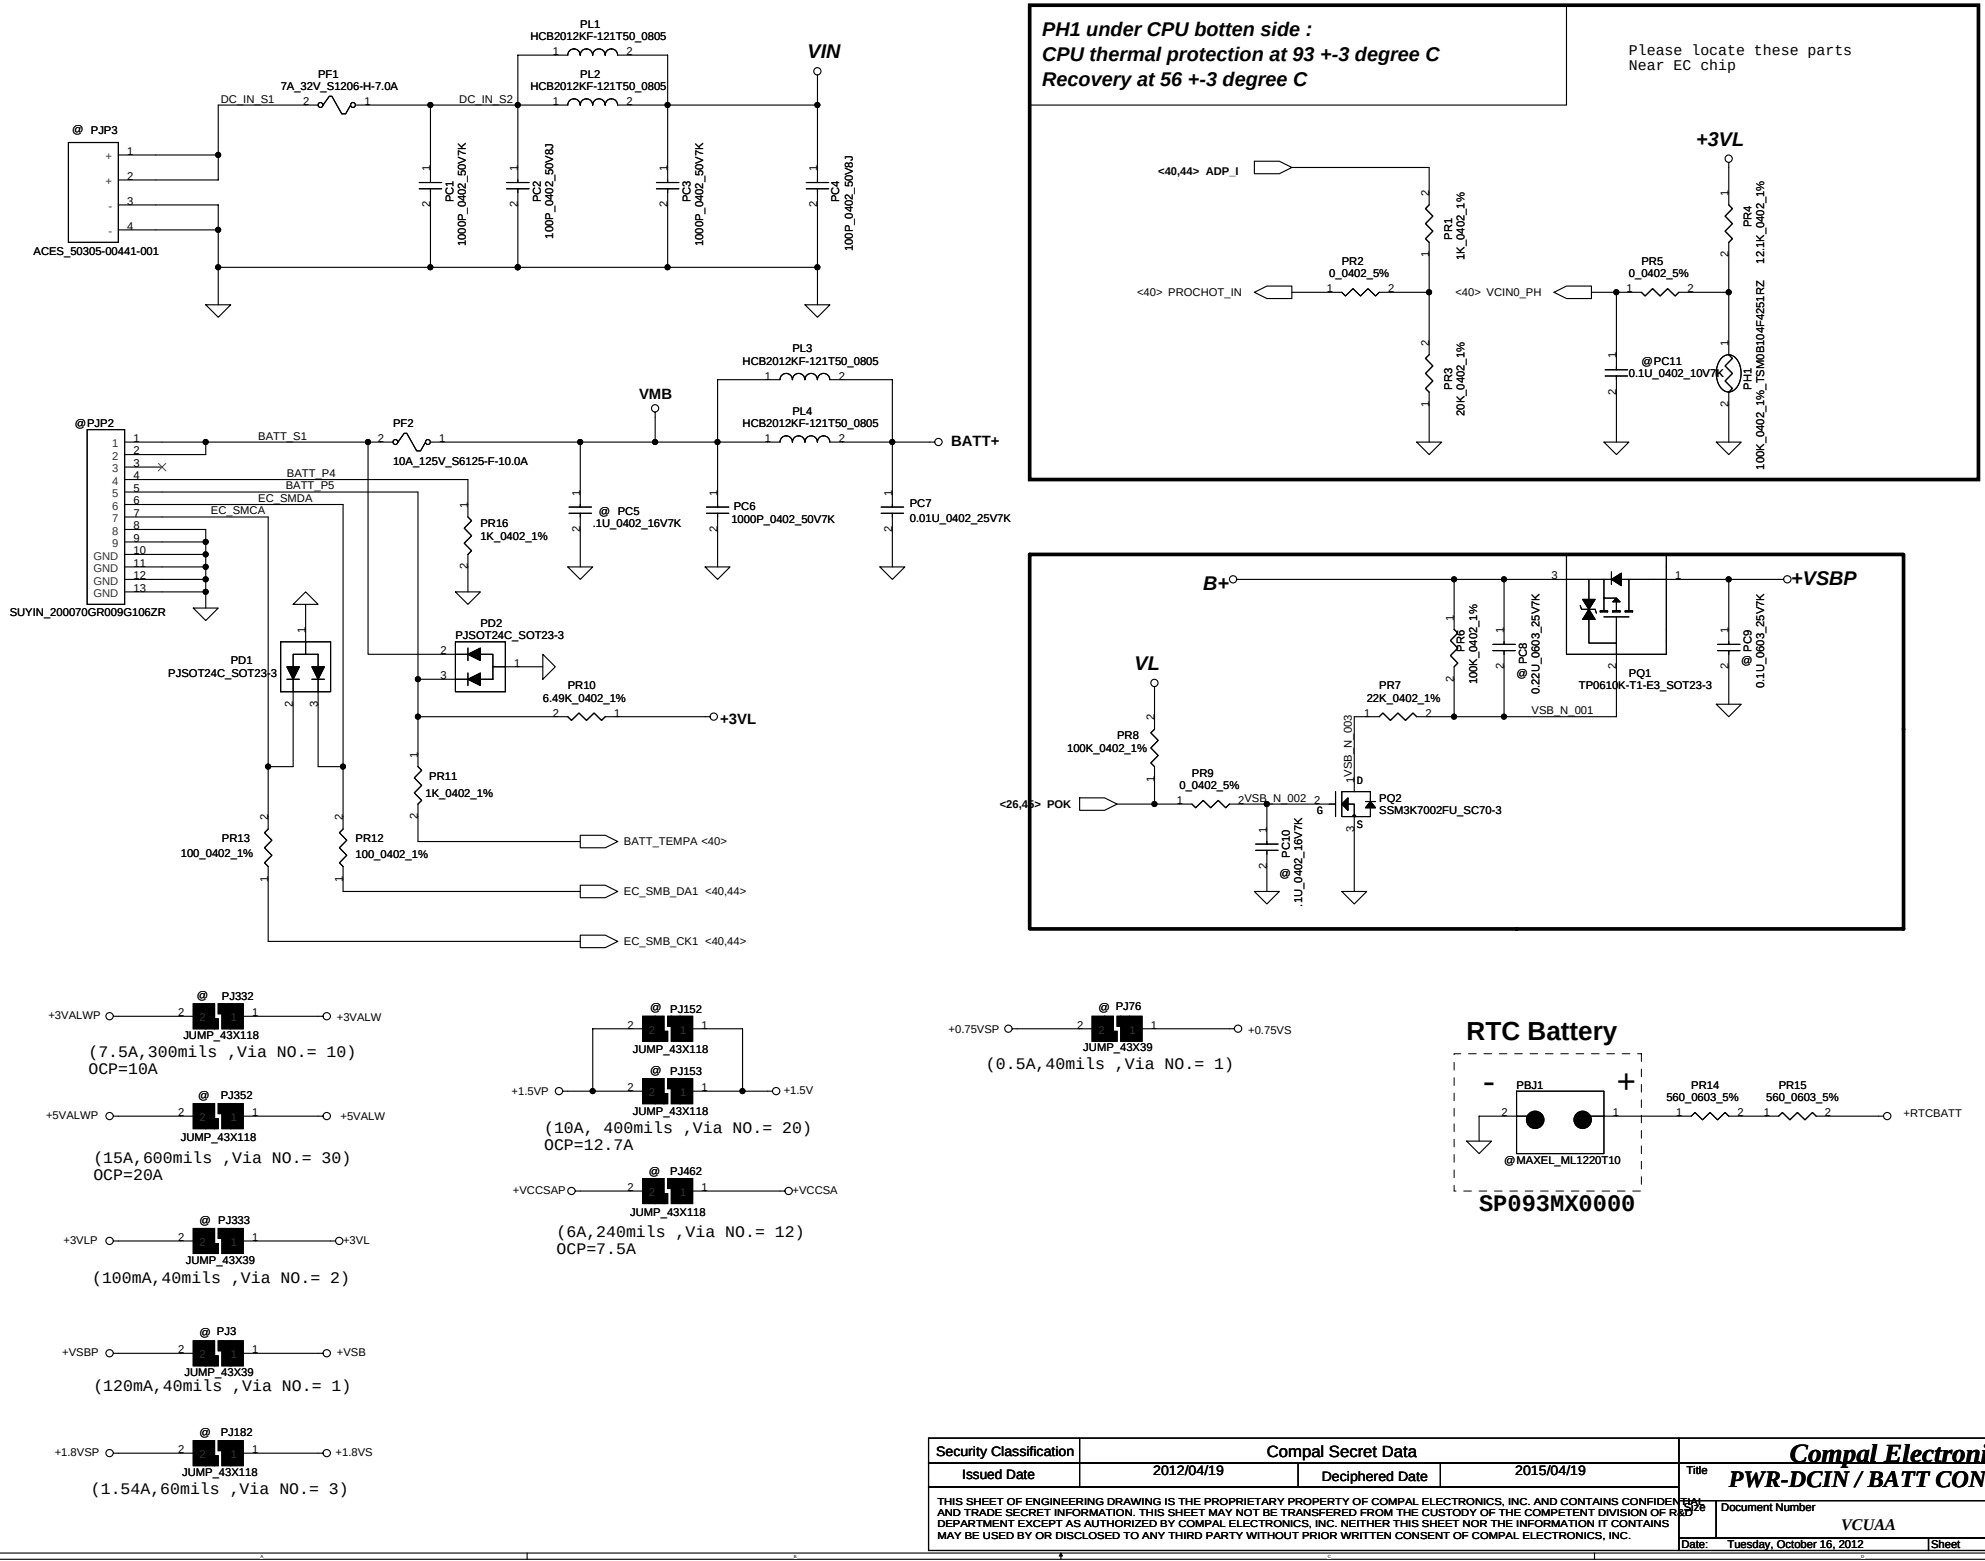

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: PWR-DCIN / BATT CONN / OTP

Size: C | Document Number: VCUAA | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 43 of 53

for reverse input protection

PQ209 SSM3K7002FU_SC70-3

PR225 1M_0402_5%

PR226 3M_0402_5%

AON6504_POWERDFN56-8-5

PQ203

PQ205 DMG4406LSS_SO8

PR211 0.01_1206_1%

PL201 1UH_NRS4018T1R0NDGJ_3.2A_30%

PQ207 DMG4406LSS_SO8

PC211 10U_0805_25V6K

PC212 @ 10U_0805_25V6K

PC216 @ 0.1U_0402_25V6

PC213 @ 10U_0805_25V6K

PC214 10U_0805_25V6K

PC215 0.1U_0402_25V6

PC230 2200P_0402_50V7K

PR231 @ 0_0402_5%

PC231 0.1U_0402_25V6

<BOM Structure>

BQ24725_ACDRV_1

PC236 0.1U_0402_25V6

PC234 0.01U_0402_50V7K

PR232 @ 0_0402_5%

BQ24725_BATDRV

BQ24725_BATDRV_1

PR233 4.12K_0603_1%

PD230 BAS40CW_SOT323-3

PC238 0.1U_0603_25V7K

PC235 0.1U_0402_25V6

PR228 10_1206_1%

0.047U_0402_25V7K PC237

PR229 2.2_0603_5%

PD231 RB751V-40_SOD323-2

PQ201 AON7408L

DH_CHG

PC239 1U_0603_25V6K

PC205 1U_0603_25V6K

PR234 4.12K_0603_1%

PR235 4.12K_0603_1%

BQ24725_ACP

BQ24725_ACN

BQ24725_VCC

BQ24725_LX

BQ24725_BST

BQ24725_REGN

PL202 4.7UH_ETQP3W4R7WFN_5.5A_20%

PR227 0.01_1206_1%

BATT+

PU200

BQ24725RGRR_VQFN20_3P5X3P5

PAD VCC PHASE HIDRV BTST REGN

ACN LODRV DL_CHG

ACP GND

CMSRC SRP SRP

ACDRV SRN SRN

ACOK BATDRV BQ24725_BATDRV

ACDET IOUT SDA SCL ILIM

PQ202 AON7406L

PR236 10_0603_1%

PR237 6.8_0603_5%

PC242 0.1U_0603_16V7K

PR206 4.7_1206_5%

PC206 680P_0603_50V8J

CSOP1 CSON1

PC240 0.1U_0402_25V6

PC241 0.1U_0402_25V6

PC221 @ 10U_0805_25V6K

PC222 10U_0805_25V6K

PC223 10U_0805_25V6K

PC224 2200P_0402_50V7K

PC225 0.01U_0402_50V7K

BQ24725_CMSRC

BQ24725_ACDRV

+3VALW

@PR238 10K_0402_1%

BQ24725_ACOK

+3VL

PR239 10K_0402_1%

<26,40> ACIN

PR240 10K_0402_1%

BQ24725_ILIM

PR241 357K_0402_1%

PR242 100K_0402_1%

PC243 0.01U_0402_25V7K

VIN

PR243 270K_0402_1%

PR244 154K_0402_1%

BQ24725_ACDET

PC244 0.1U_0402_25V6

PR245 66.5K_0402_1%

PC245 100P_0402_50V8J

PR246 100_0402_5%

@PC246 0.1U_0402_10V7K

EC_SMB_CK1 <40,43>

EC_SMB_DA1 <40,43>

ADP_I <40,43>

PR247 309K_0402_1%

PR248 10K_0402_1%

ADP_V <40>

PR249 47K_0402_1%

@PC247 0.1U_0402_10V7K

Vin Dectector

	Min.	Typ	Max.
H-->L		17.23V	
L--> H		17.63V	

ILIM and external DPM 3.97A

Please locate the RC
Near EC chip
2011-02-22

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: **PWR-CHARGER**

Size: | Document Number: VCUAA | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 44 of 53

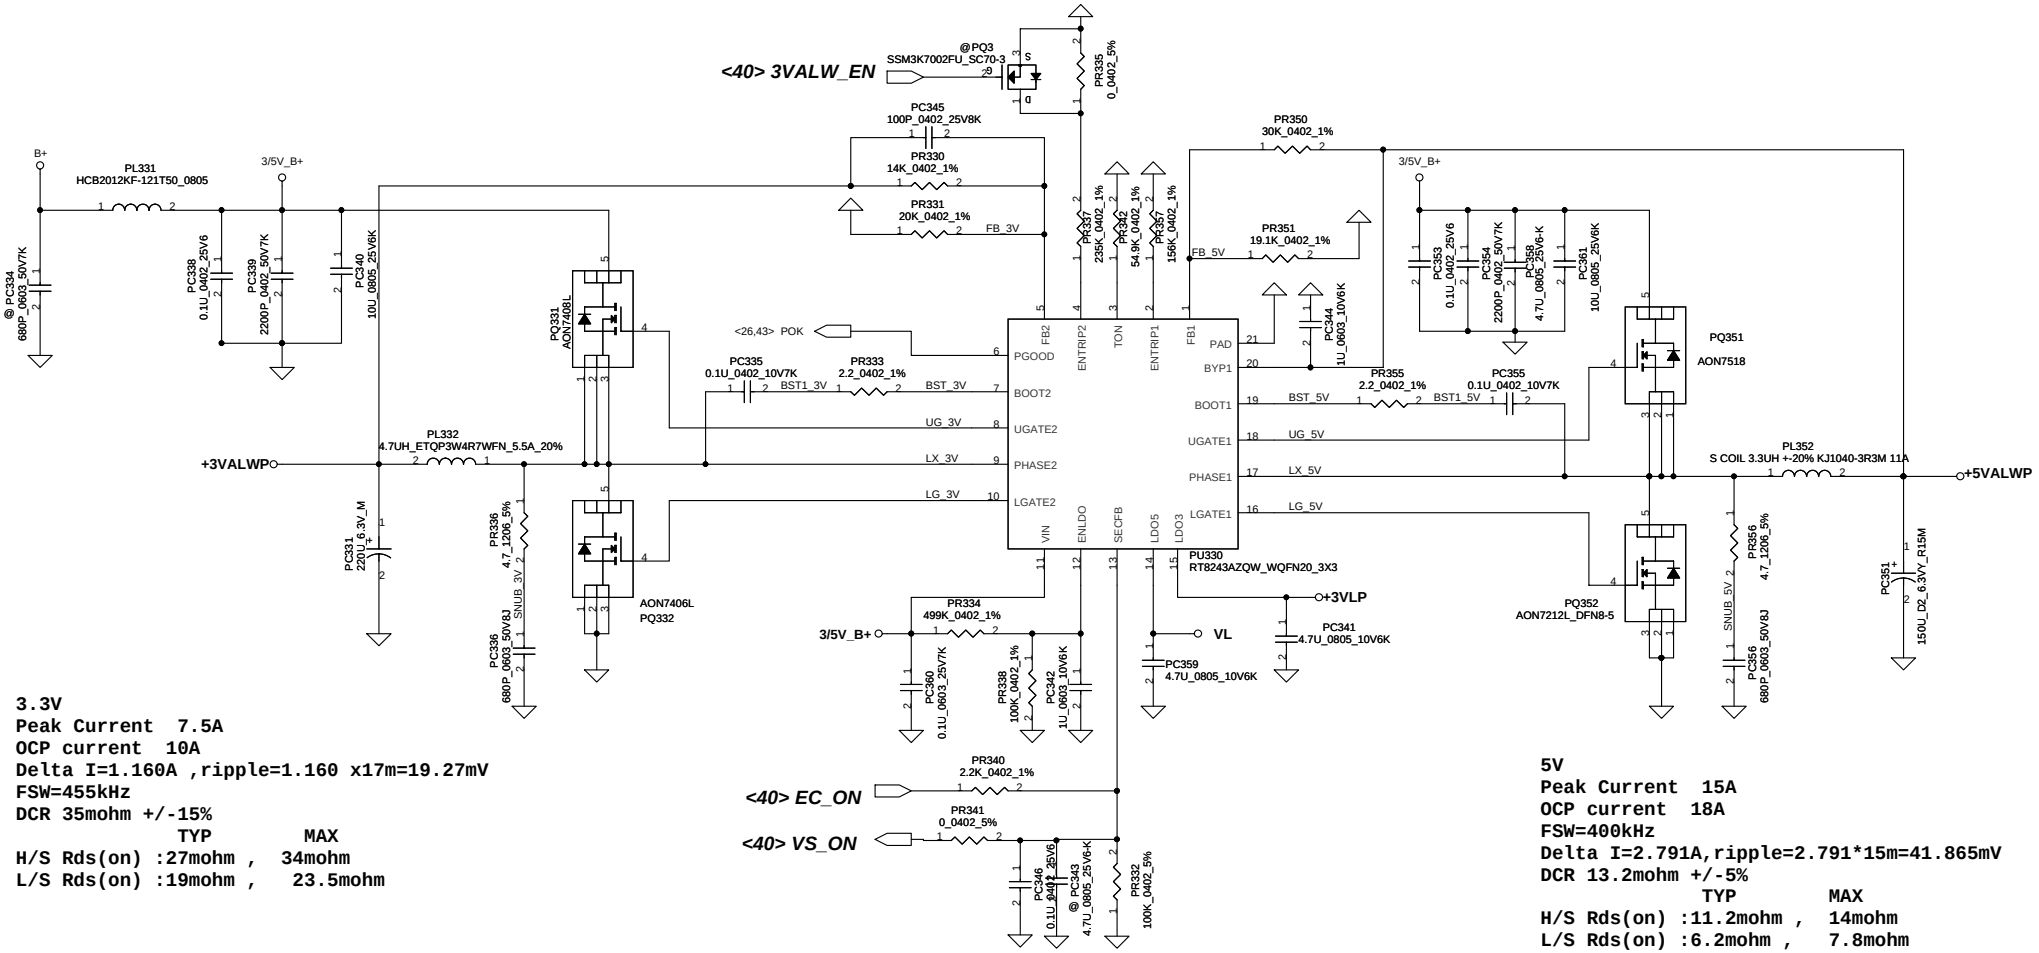

3.3V
Peak Current 7.5A
OCP current 10A
Delta I=1.160A ,ripple=1.160 x17m=19.27mV
FSW=455kHz
DCR 35mohm +/-15%

	TYP	MAX
H/S Rds(on) :	27mohm ,	34mohm
L/S Rds(on) :	19mohm ,	23.5mohm

5V
Peak Current 15A
OCP current 18A
FSW=400kHz
Delta I=2.791A,ripple=2.791*15m=41.865mV
DCR 13.2mohm +/-5%

	TYP	MAX
H/S Rds(on) :	11.2mohm ,	14mohm
L/S Rds(on) :	6.2mohm ,	7.8mohm

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.	
Title	PWR-3.3VALWP/5VALWP
Size: Custom	Document Number: VCUAA
Rev	1.0
Date: Tuesday, October 16, 2012	Sheet 45 of 53

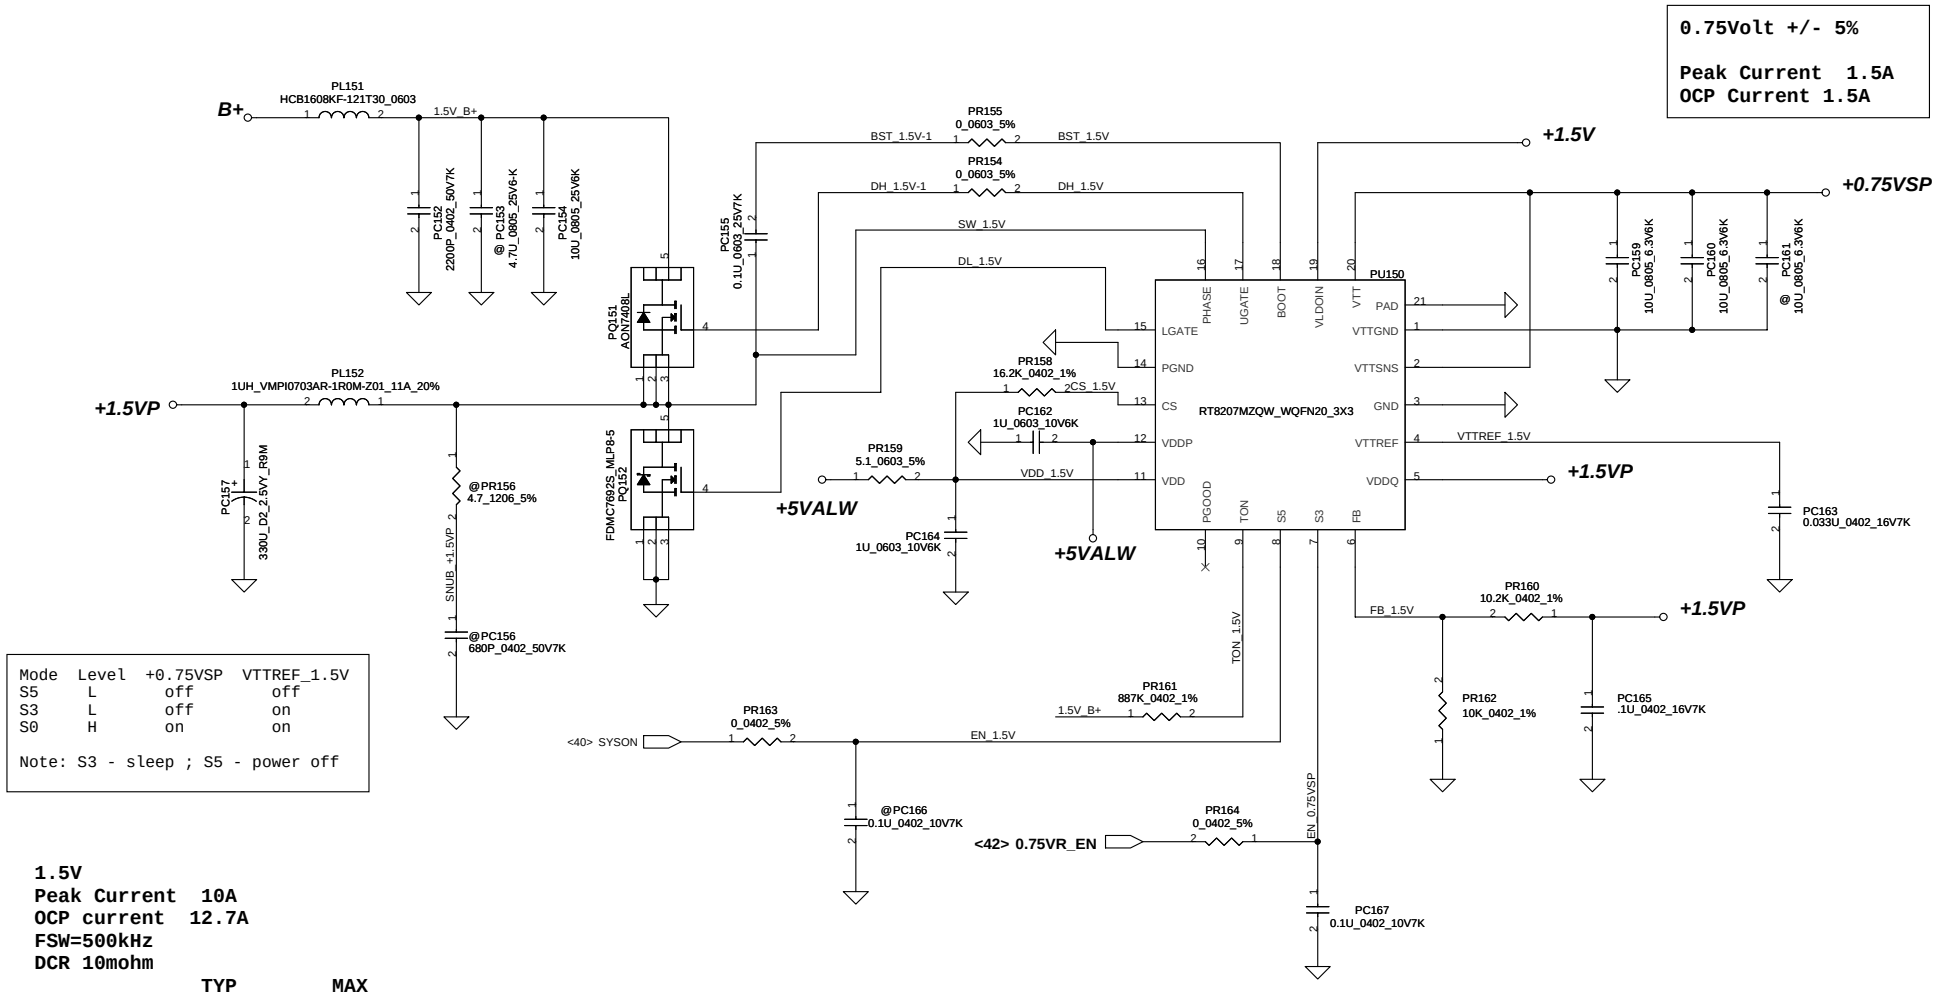

Mode	Level	+0.75VSP	VTTREF_1.5V
S5	L	off	off
S3	L	off	on
S0	H	on	on

Note: S3 - sleep ; S5 - power off

1.5V
Peak Current 10A
OCP current 12.7A
FSW=500kHz
DCR 10mohm

	TYP	MAX
H/S Rds(on) :	27mohm ,	34mohm
L/S Rds(on) :	9.6mohm ,	13mohm

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: +1.5VP/+0.75VSP

Size | Document Number: VCUAA | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 46 of 53

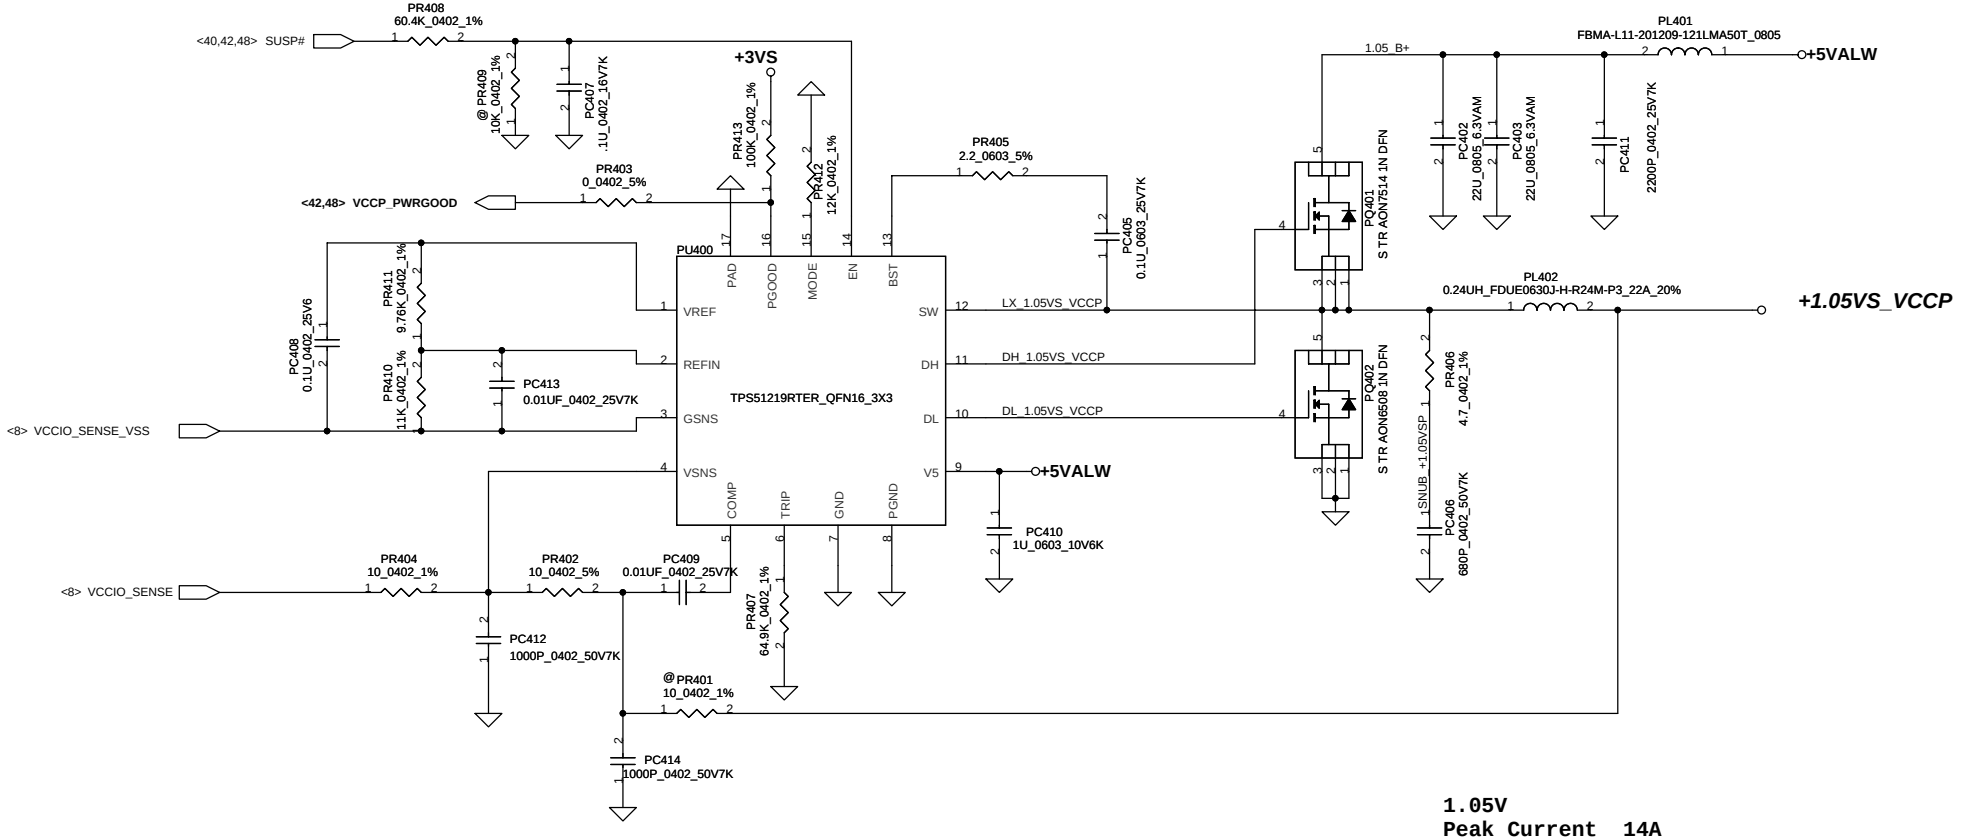

1.05V
Peak Current 14A
OCP current 15.08A
FSW=300kHz
Delta I=5.883A,Rippe=5.883x 4.5m=26.473Mv
DCR 3.7ohm +

	TYP	MAX
H/S Rds(on) :	5.6mohm ,	6.8mohm
L/S Rds(on) :	3.7mohm ,	5mohm

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: **PWR-V1.05SP/16V**

Size: Custom | Document Number: VCUAA | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 47 of 53

VID [0]	VID[1]	VCCSA Vout
0	0	0.9V
0	1	0.85V
1	0	0.775V
1	1	0.750V

output voltage adjustable network

The 1k PD on the VCCSA VIDs are empty. These should be stuffed to ensure that VCCSA VID is 00 prior to VCCIO stability.

VCCSA
TDC 4.2A
Peak Current 6.0A
OCP current 7.5A
Freque = 700K

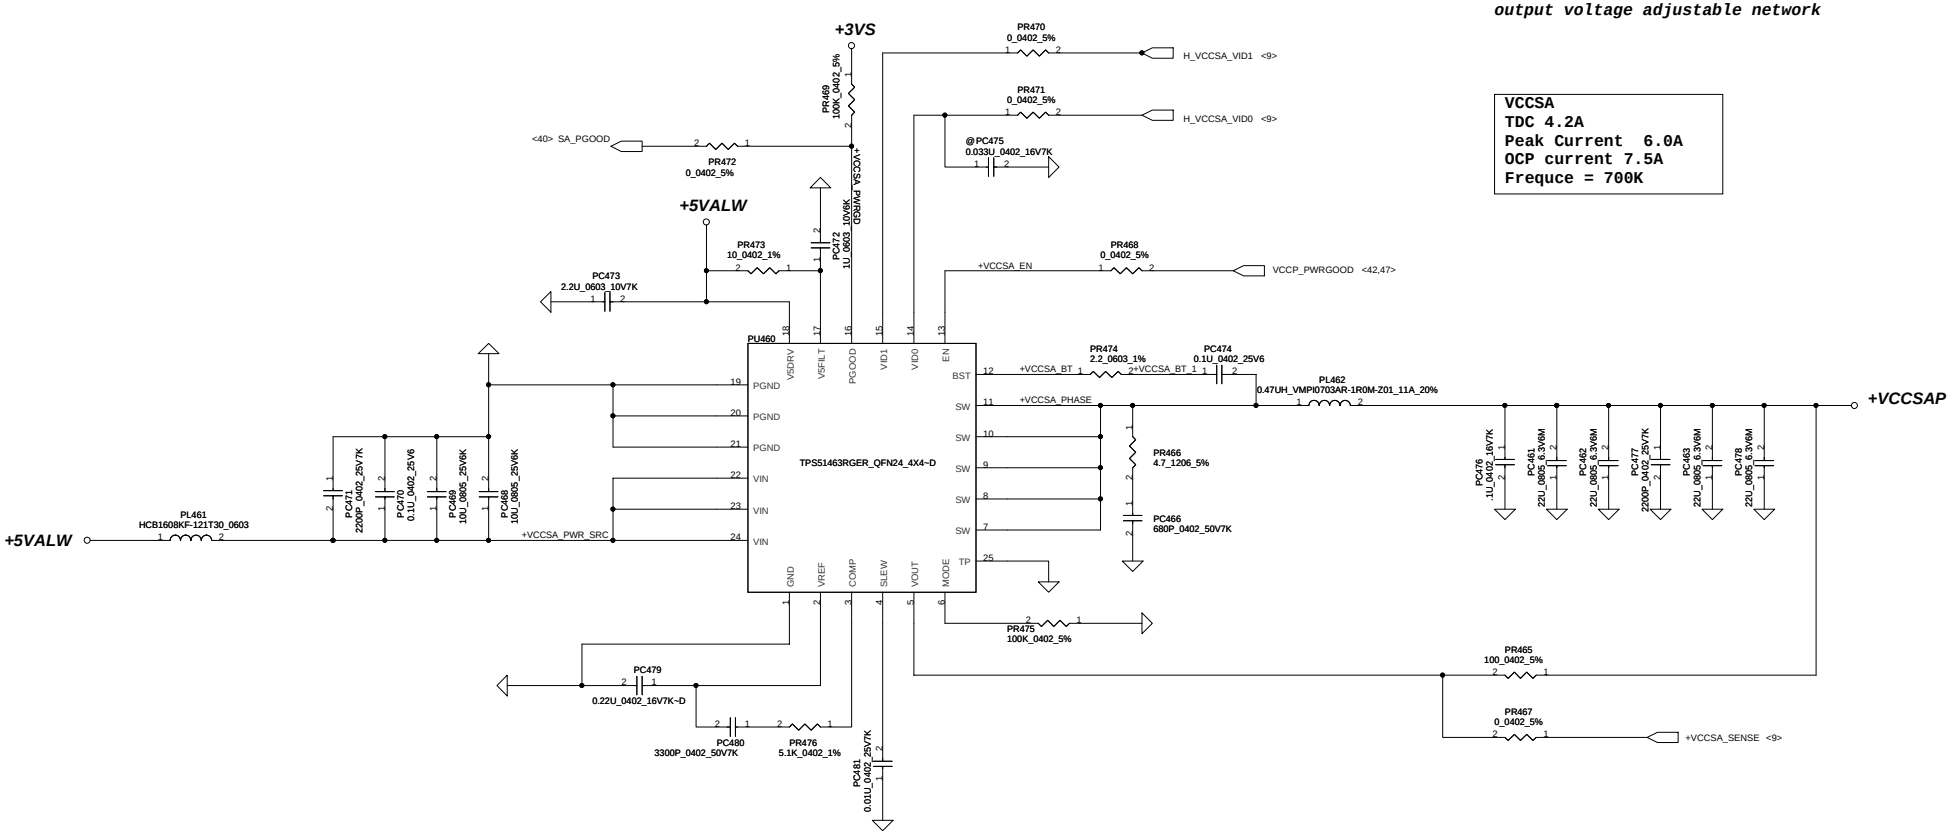

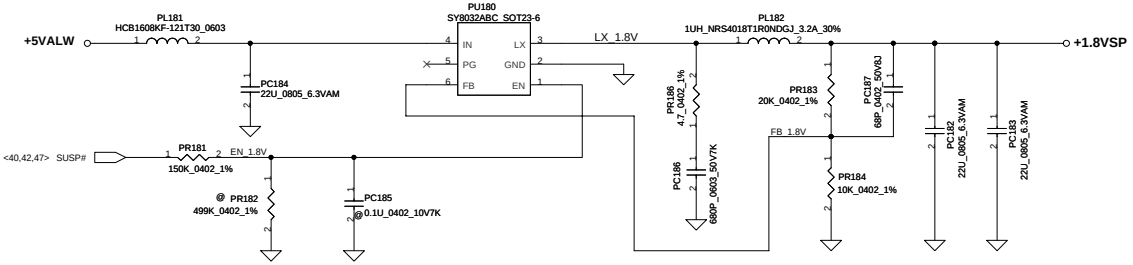

VCCSA

Peak Current 1.54A
OCP current 1.078A

DELL CONFIDENTIAL/PROPRIETARY

123

Title: PWR-VCCSAP/1.8VSP

Size: | Document Number: VCUAA | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 48 of 53

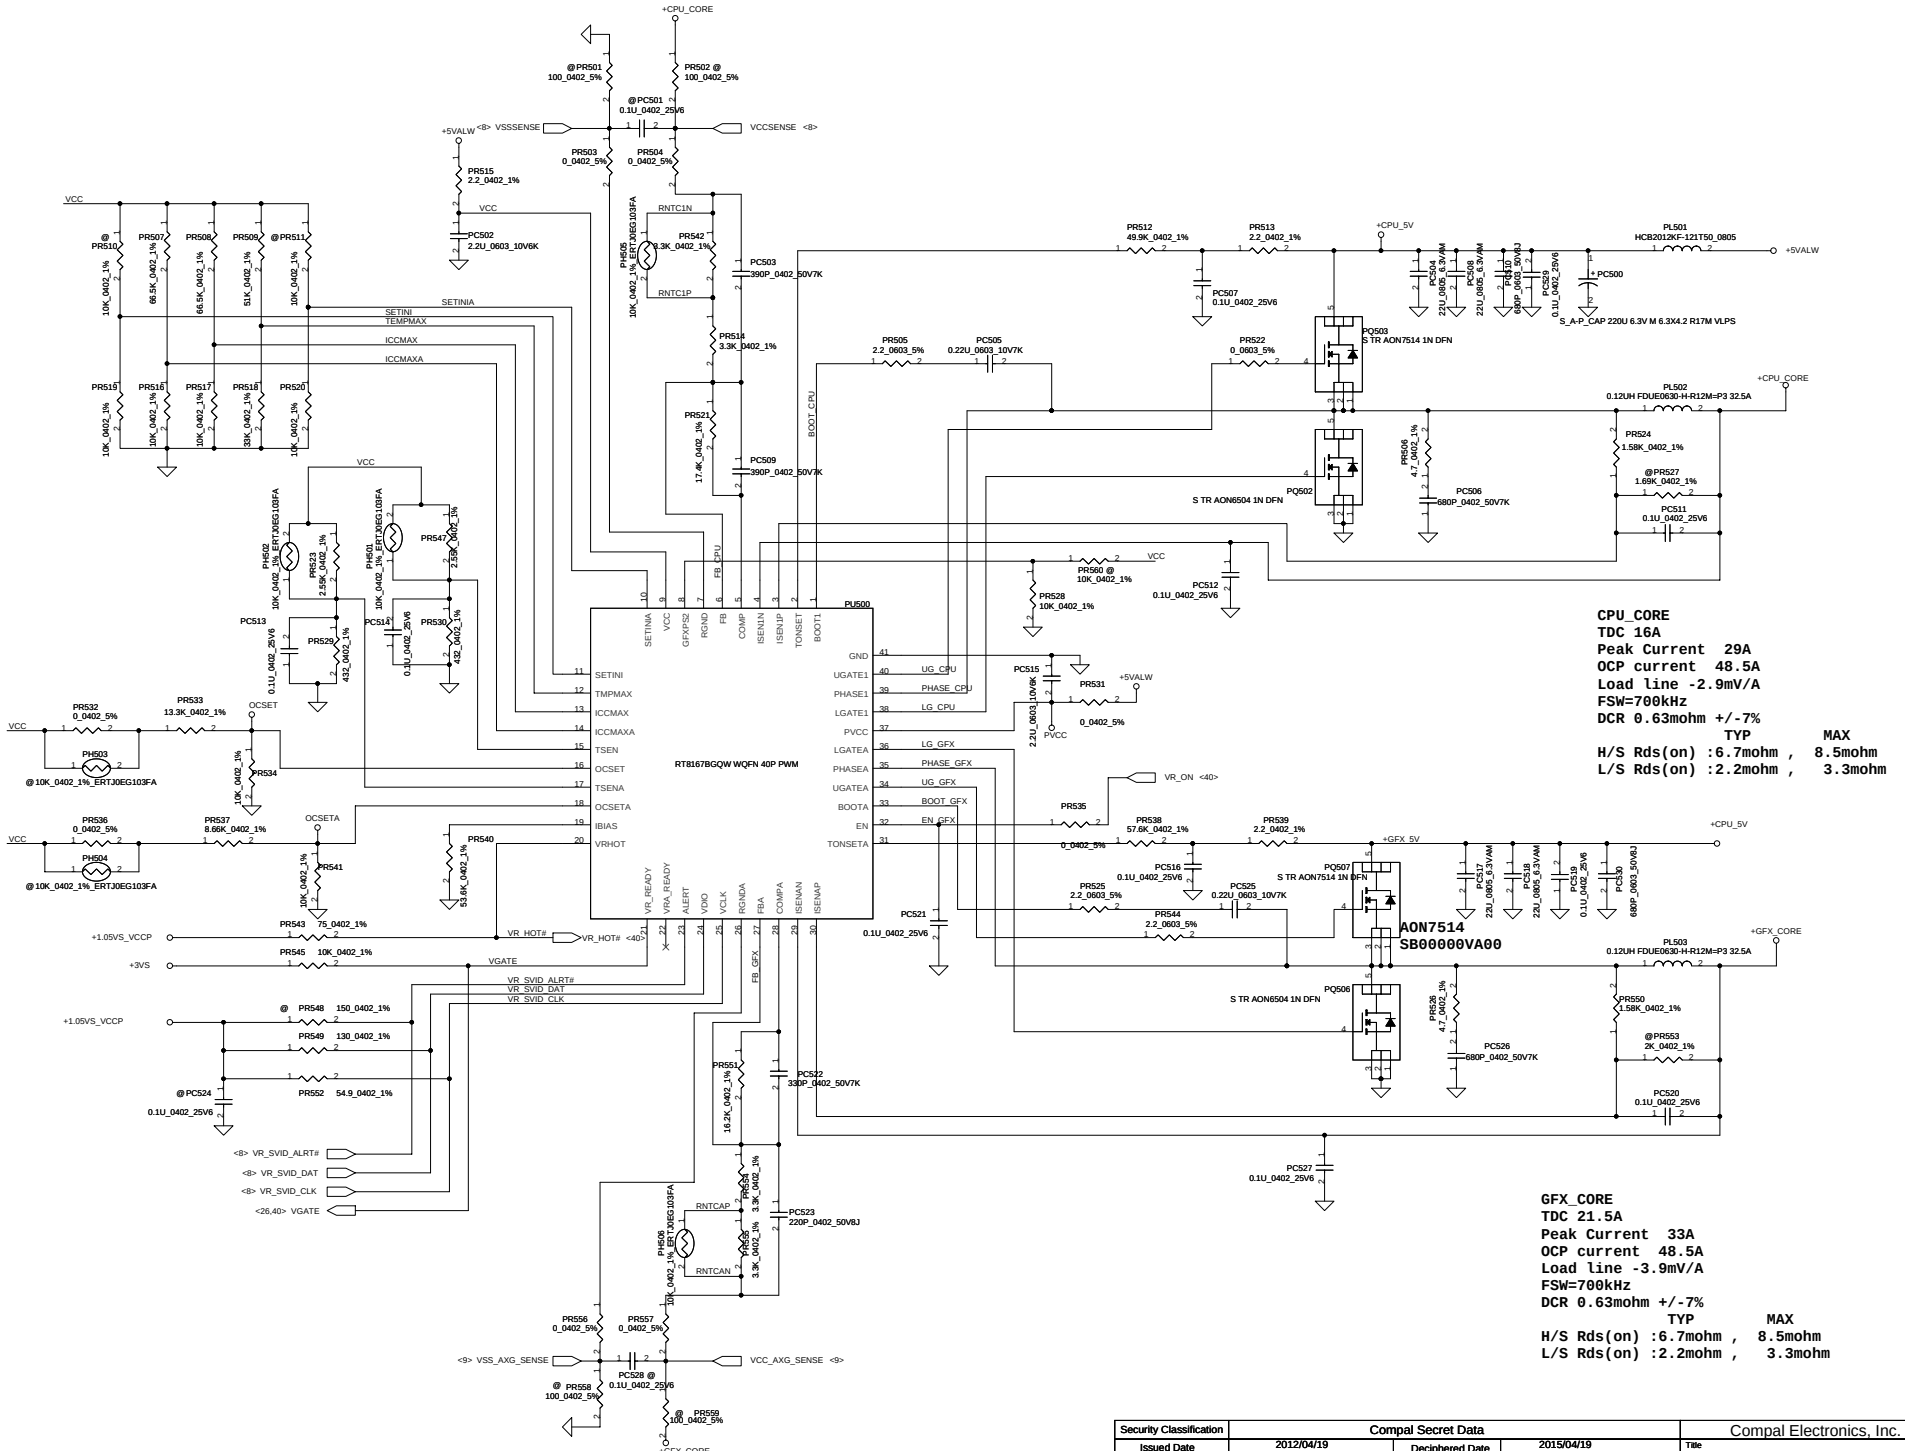

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date 2015/04/19	Title: PWR- CPU GFX CORE
THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.			Size: A2 / Document Number: LA-8551P / Rev: 1.0
			Date: Tuesday, October 16, 2012 / Sheet 49 of 53

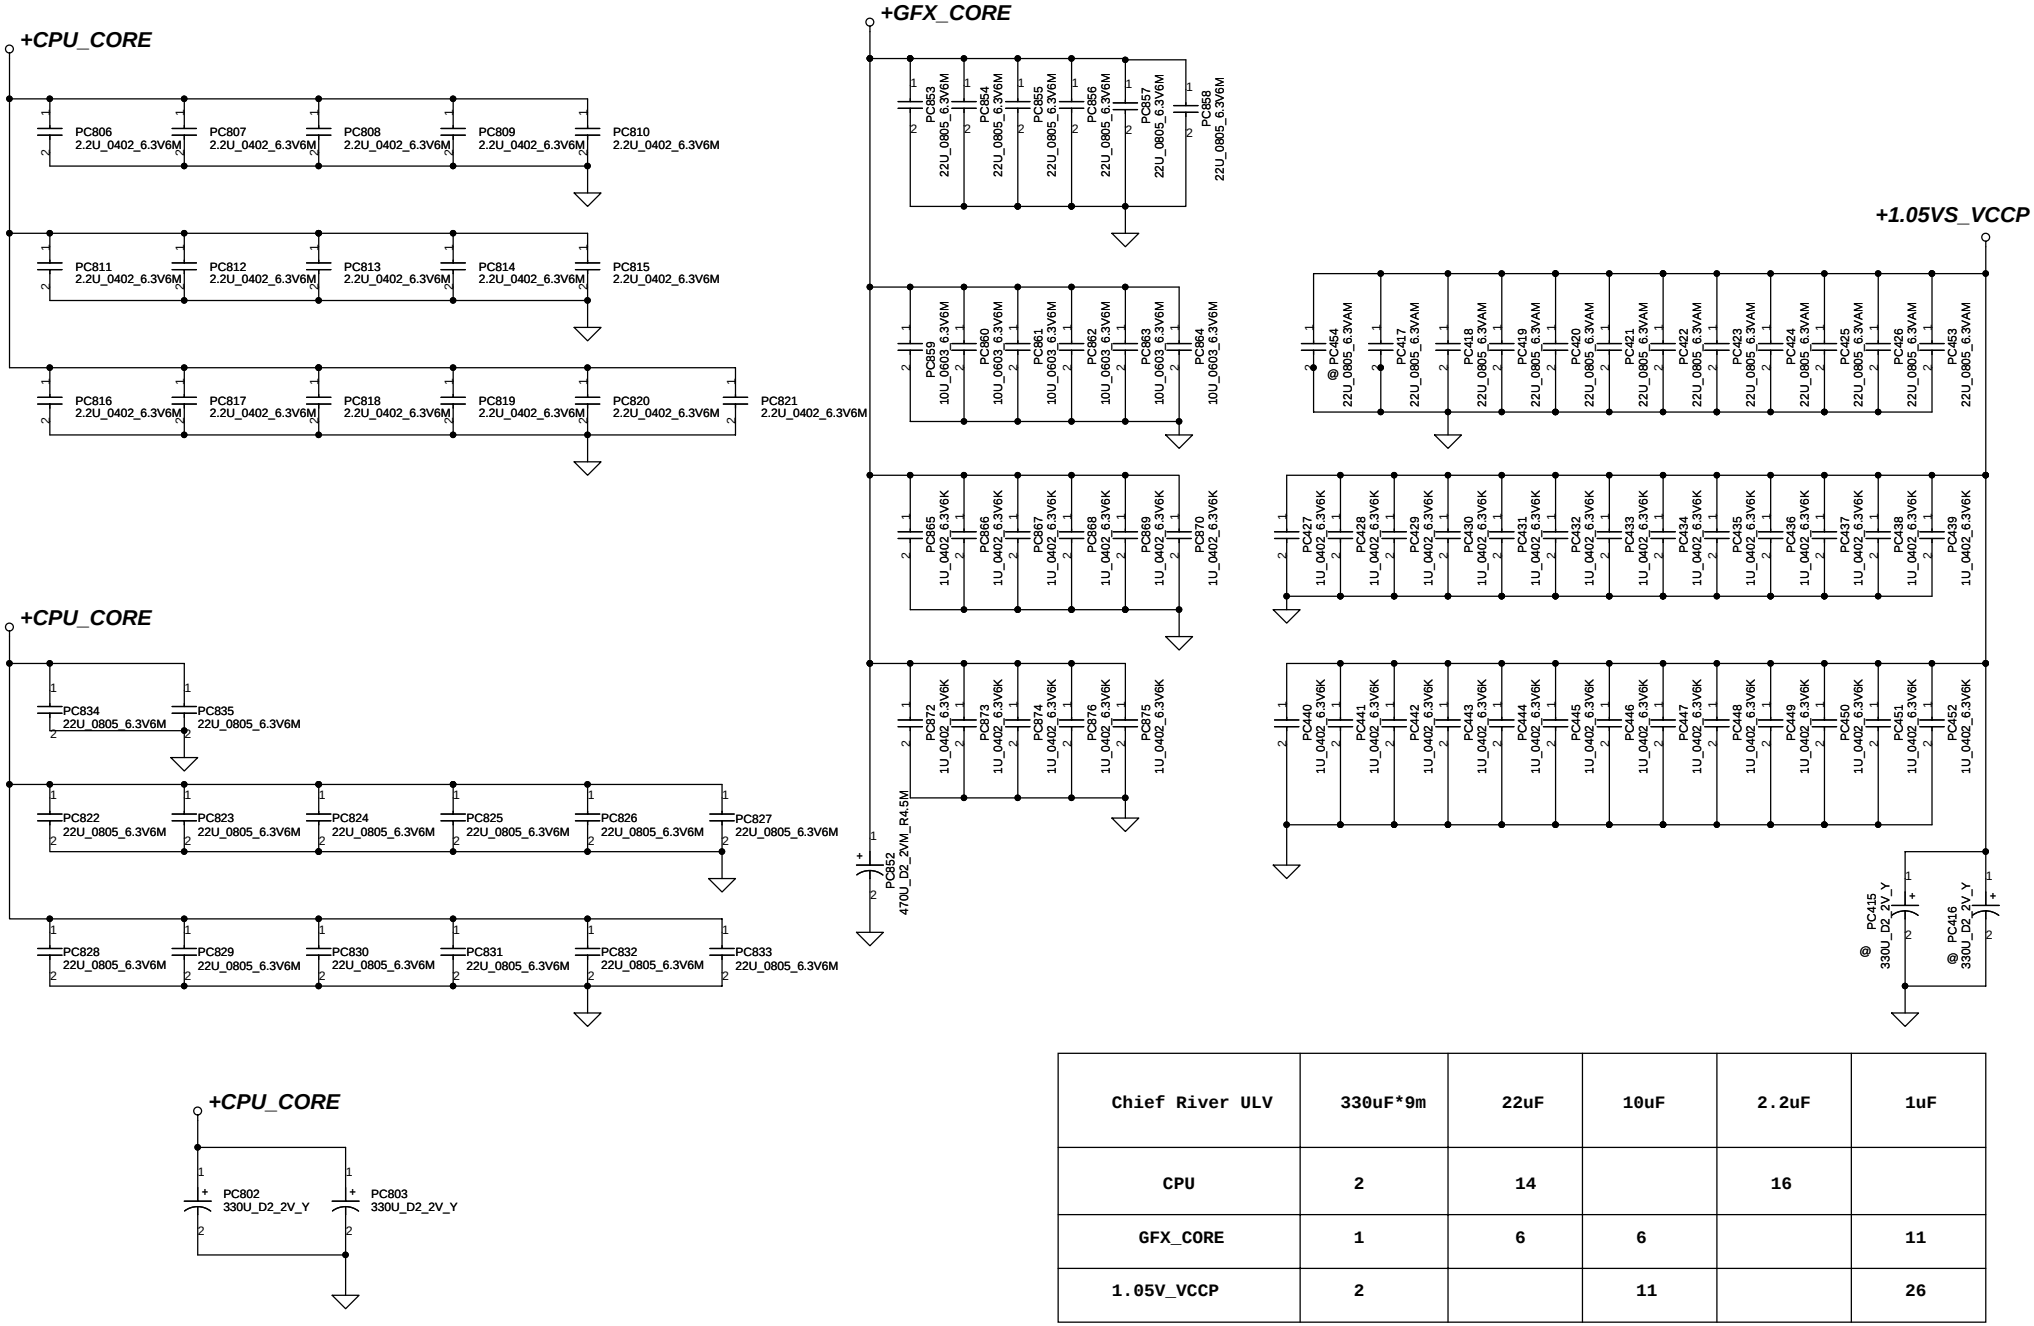

Chief River ULV	330uF*9m	22uF	10uF	2.2uF	1uF
CPU	2	14		16	
GFX_CORE	1	6	6		11
1.05V_VCCP	2		11		26

Security Classification	Compal Secret Data		
Issued Date	2012/04/19	Deciphered Date	2015/04/19

Compal Electronics, Inc.

Title: PWR - PROCESSOR DECOUPLING

Size | Document Number: VCUAA | Rev: 1.0

Date: Tuesday, October 16, 2012 | Sheet 50 of 53

VGA_Core
TDC 35A
Peak Current 42A
OCP current 65A
Load line -
FSW=300kHz
DCR 1.5~1.8mohm +/-5%

	TYP	MAX
H/S Rds(on) :	11.2mohm ,	14mohm
L/S Rds(on) :	3.7mohm ,	5mohm

Total capacitor
1320u
ESR=2.25m ohm

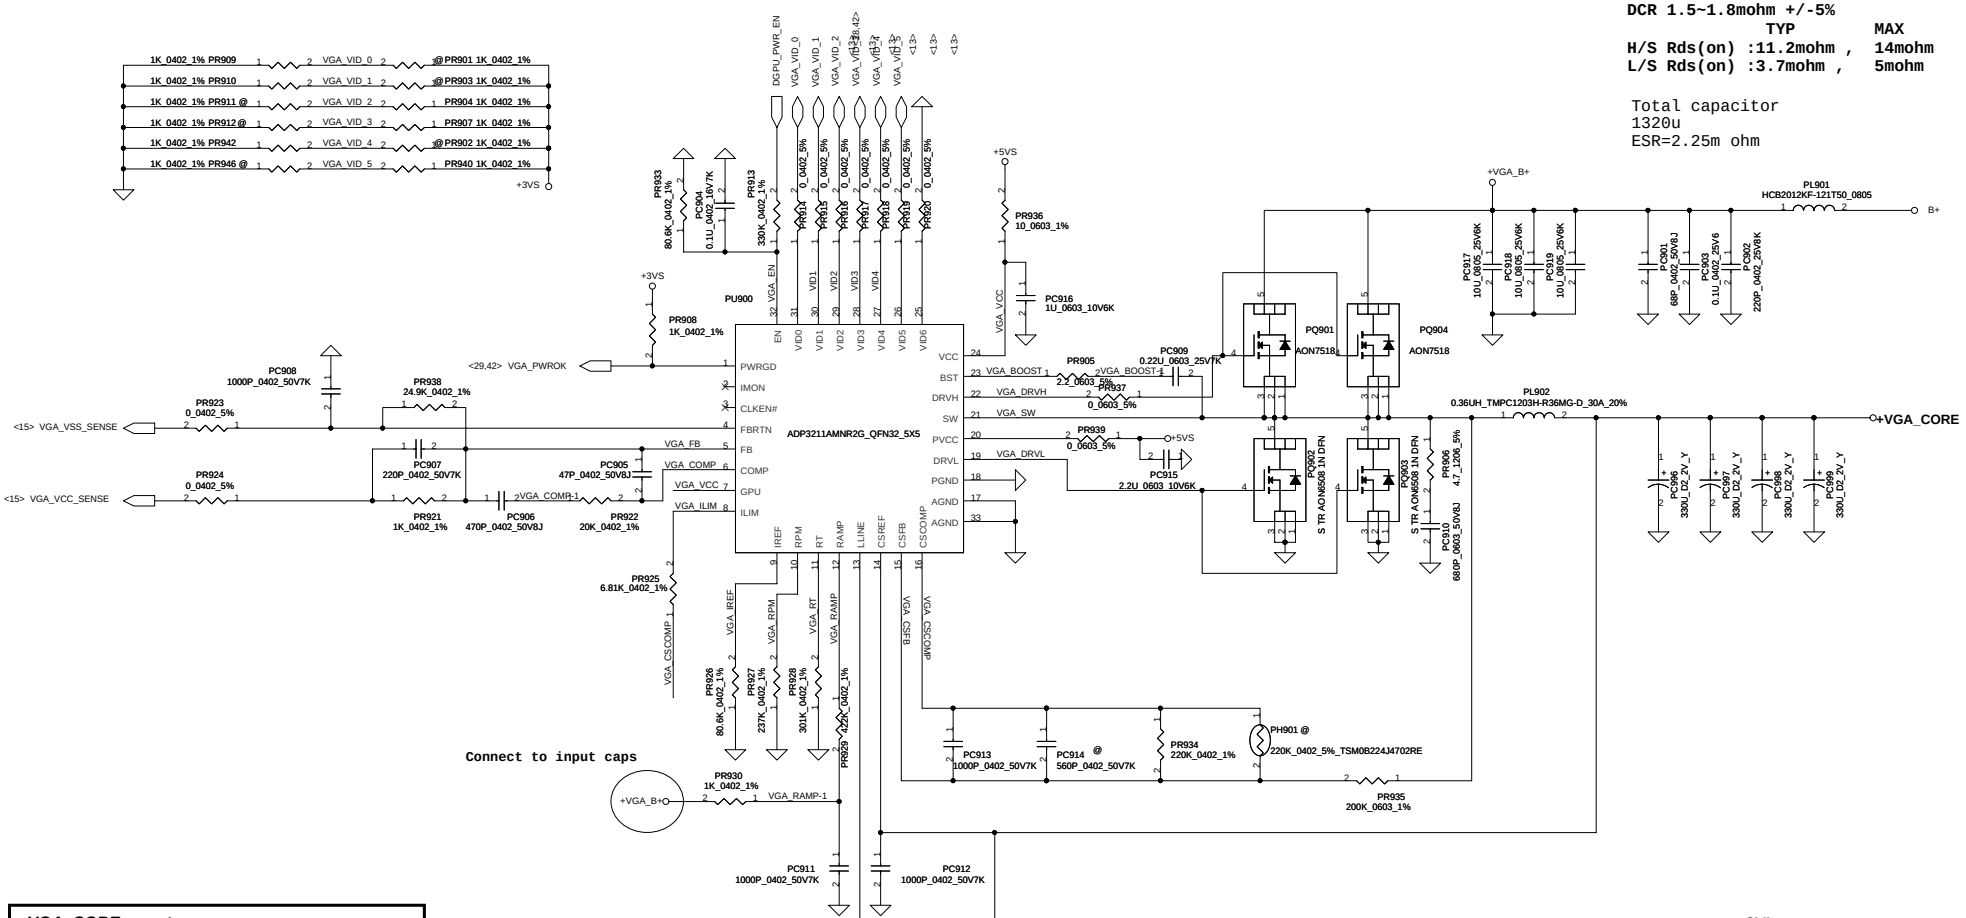

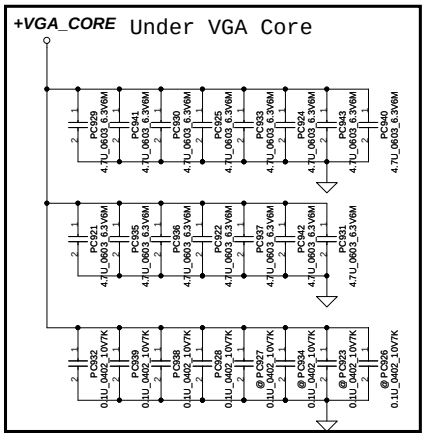

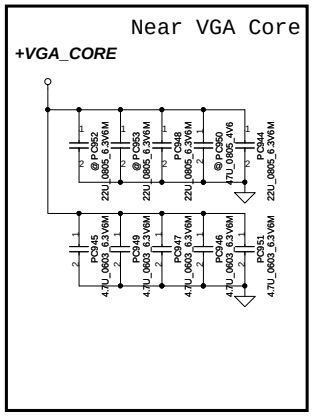



PR931	PR932	LL
@	0	X
0	@	V

Security Classification	Compal Secret Data		Compal Electronics, Inc.
Issued Date	2012/04/19	Deciphered Date	2015/04/19

THIS SHEET OF ENGINEERING DRAWING IS THE PROPRIETARY PROPERTY OF COMPAL ELECTRONICS, INC. AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION. THIS SHEET MAY NOT BE TRANSFERED FROM THE CUSTODY OF THE COMPETENT DIVISION OF R&D DEPARTMENT EXCEPT AS AUTHORIZED BY COMPAL ELECTRONICS, INC. NEITHER THIS SHEET NOR THE INFORMATION IT CONTAINS MAY BE USED BY OR DISCLOSED TO ANY THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF COMPAL ELECTRONICS, INC.

Title	+VGA_COREP		
Size	Document Number	LA-8712P	Rev 1.0
Date:	Tuesday, October 16, 2012	Sheet	51 of 53

Version change list (P.I.R. List)

for PWR

Item	Reason for change	PG#	Modify List	Date	Phase
1	HW command (Follow QFKAA)	45	change PR330 13K to 14K	2012/5/17	DVT
2	HW command (Follow QFKAA)	45	change PR351 20K to 19.1K	2012/5/17	DVT
4	fine tune 1.5V ocp =12.6A	46	change PR158 13.3K to 16.2K	2012/5/17	DVT
5	fine the 1.05V vout volatge=1.059V	47	change PR411 10.5K to 9.76K	2012/5/17	DVT
6	fine tune the CPU load line =2.7mV	49	change PR521 14.3K to 17.4K	2012/5/17	DVT
7	fine tune the GFX load line =3.7mV	49	change PR551 10.5K to 16.2K	2012/5/21	DVT
8	fine tune the GFX load line =3.7mV	49	change PC522 560P to 330P	2012/5/21	DVT
9	fine tune the GFX OCP setting	49	change PR537 13.3K to 8.66K	2012/5/21	DVT
10	purchaser command for cost down plane	48	change PU460 SY8037D to TPS51463	2012/5/22	DVT
11	for 1.05V high frequeence change to remote sense	47	add PR402 reserve PR401	2012/5/24	DVT
12	for 1.05V high frequeence	47	change PR412 100k to 12K	2012/5/24	DVT
13	change the same solution for 2nd sourcd	44	change PQ203 TPCA8057 to AON6504	2012/5/24	DVT
14	change the same solution for 2nd sourcd	44	change PR227 with the same PR211	2012/5/25	DVT
15	change the same solution for 2nd sourcd	46	change PC157 with the same PC996	2012/5/25	DVT
16	fine tune 1.05V vout volatge=1.059V	47	change PR410 12K to 11K	2012/5/25	DVT
17	fine tune the CPU DCR sense	49	change PR538 49.9K to 57.6K	2012/5/25	DVT
18	fine tune the CPU DCR sense	49	change PR550 1.13K to 1.58K	2012/5/25	DVT
19	fine tune the 5V OCP=18A	45	change PR357 120K to 133K	2012/5/25	DVT
20	fine tune 3.3V OCP =10A	45	change PR337 120K to 200K	2012/5/25	DVT
21	for 1.05V high frequeence	47	change PL402 0.47u to 0.24u	2012/5/25	DVT
22	for 1.05V high frequeence	47	Reserve the PC415 and PC416	2012/5/25	DVT
23	change the 3v/5v IC version	45	change the PU330 RT8243B to RT8243A	2012/5/25	DVT
24	change 1.5V chokethe same part number with PL462	46	change the PL152 SH00000GJ00 to SH00000KS00	2012/5/25	DVT
25	change 1.05V high frequeence OCP=16.5A	47	change the PR407 75K to 64.9K	2012/5/25	DVT
26	change charger current =3.46A	48	change the PR241 150 Kto 357K		
27	**change the PF2 for design change**	43	change the PF2 8A to 10A		

Compal Electronics, Inc.		
Title: PIR (PWR)		
Size: Custom	Document Number: VCUAA	Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 52 of 53	

HW PIR (Product Improve Record)

VCUAA LA-9161P SCHEMATIC CHANGE LIST
REVISION CHANGE: 0.3 TO 1.0

Item	Page	Date	Request	Solution
1)	24	2012/7/23A	Change RTCBATT power rail from GCLK to original design	DH1 mount always
2)	24	2012/7/23A	remove BIOS socket	UH3 mount always
3)	41	2012/7/23A	remove debug SW	Change SW2 to @
4)	38	2012/7/26A	EMI request	CA71,CA72,CA75,CA76 mount SE025102K80/1000pF
5)	41	2012/8/3A	Update JBLG footprint	Change JBLG footprint to E-T_7182K_F04N-00R_4P
6)	41	2012/8/3A	Update H20	Change H20 from 3P8 to 3P3 size
7)	05	2012/8/6C	remove JTAG for ESD request	remove T5, T8, T9, T10, T11, T12, T13, T14, T15, T16, T17
8)	42	2012/8/6D	ESD request	mount C20,C21,C28,C30,C32,C33,C36,C37,C38,C39,C40; add C44 on SUSP
9)		2012/8/6D	Change footprint of 0ohm to Short_pad	Change location: LL2, R1, R16, R17, R388, RA17, RA18, RA28, RB1,RB32, RB34, RC119, RC183, RC73, RC88, RC92, RC94, RC95, RH128, RH208, RH213, RH214, RH221, RH242, RH244, RH246, RH247, RH249, RH25, RH286, RH311, RH312, RH314, RL433, RV182, RV80, RV81
10)	41	2012/8/6D	Change PCB PN	Change to DAZ0T700100
11)	34	2012/8/6D	EMI request	Change CM18 from 47pF to 680pF
12)	42	2012/8/6D	EMI request	Add C1(680pF) on +GFX_CORE, place close to CPU

Compal Electronics, Inc.			
Title: HW-PIR			
Size: Custom	Document Number		Rev: 1.0
Date: Tuesday, October 16, 2012	Sheet 53 of 53		