

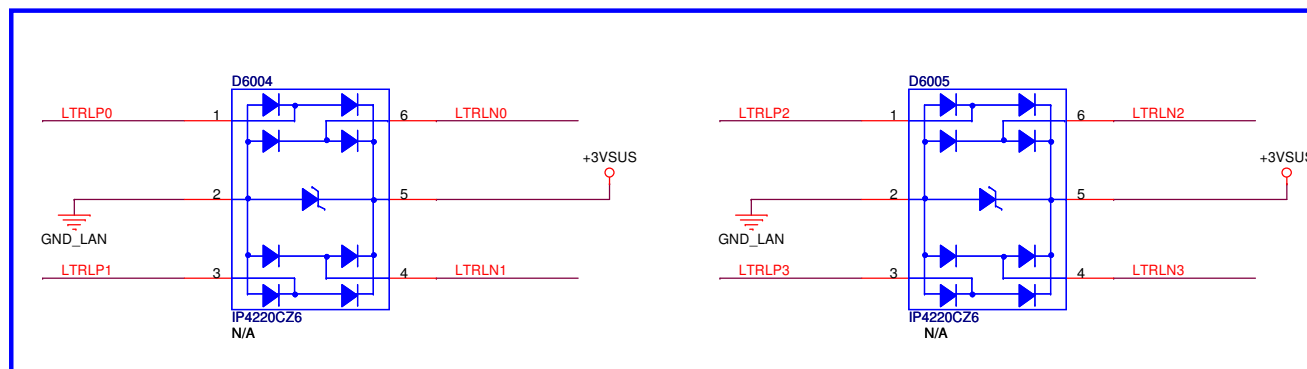
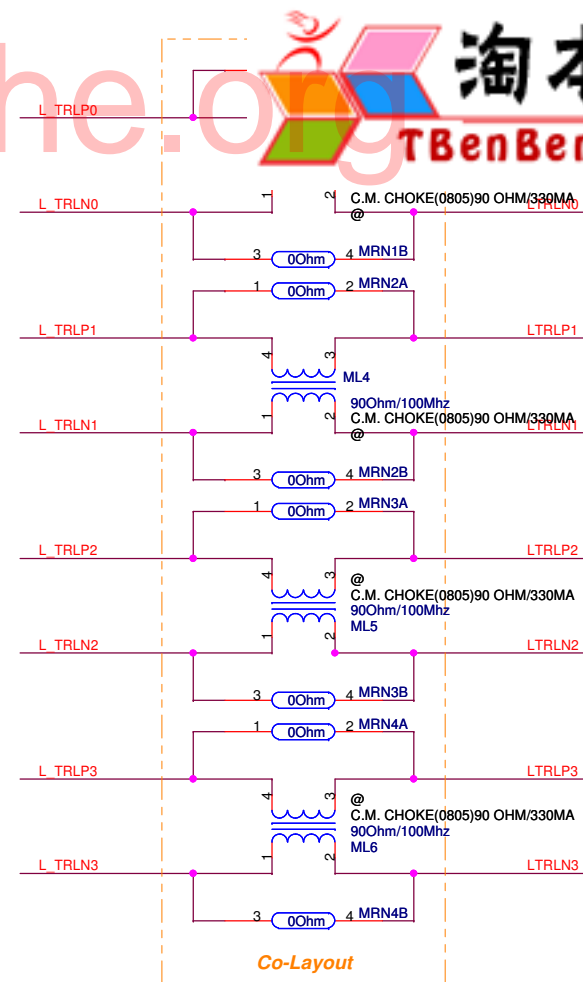
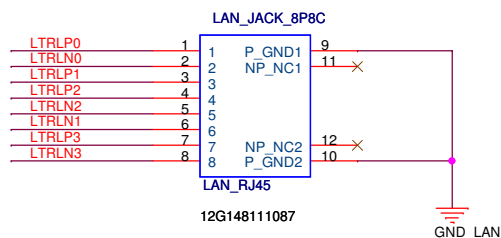
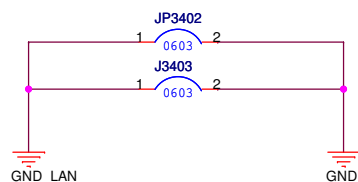


FOR K82

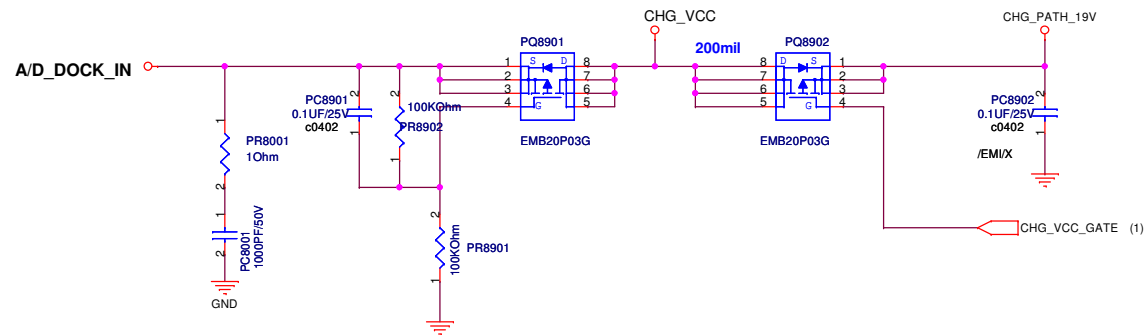


Update R2.0

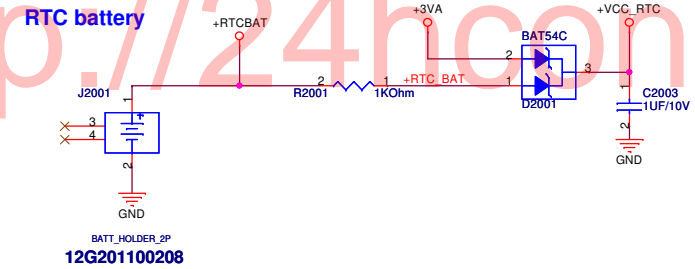

目前 BT Spec. 1.2 以上, 皆支援 AFH(Auto Freqenct Hopping), 會自動跳開環境所有的 Wi-Fi 干擾源頻率。
So 從前的BT Module 到 Wi-Fi Module 的兩條 Signals 可以不用再接了! (目前的 BT Chip 至少都有 support 到 BT 2.0以上)

關於PIN 3 PIN5的說明


WLAN

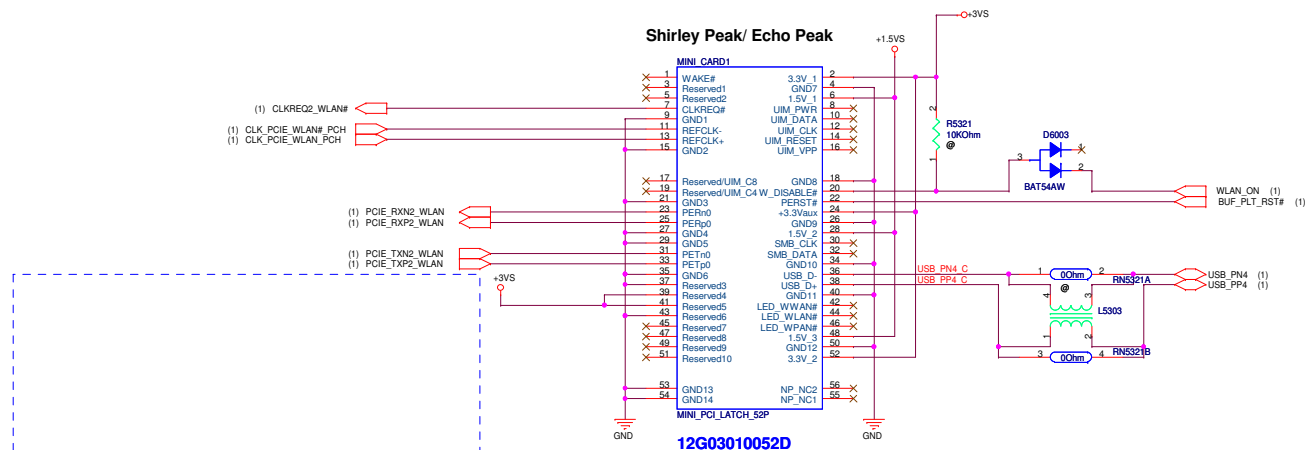

WLAN +3VAUX bypass capacitor:

Place 0.1UF near pin 2,24,52,39,31.


Place 10UF near +3VAUX_WLAN source side.

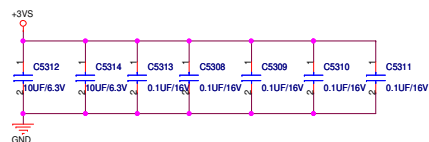

WLAN +1.5VS bypass capacitor:

Place 0.1UF near pin 6,28,48.

Place 10UF near +1.5VS source side.




Update 0910 (R2.0)




WLAN nuts:

Minicard spec R1.2:

Full size card= 2pcs.

Half size card= 2pcs.

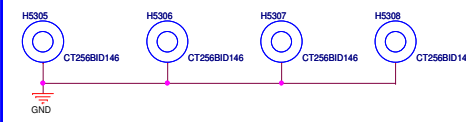

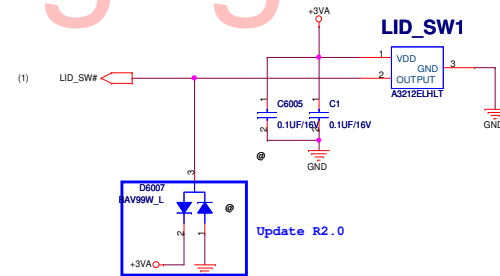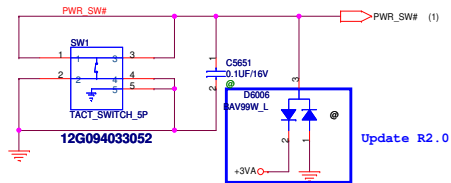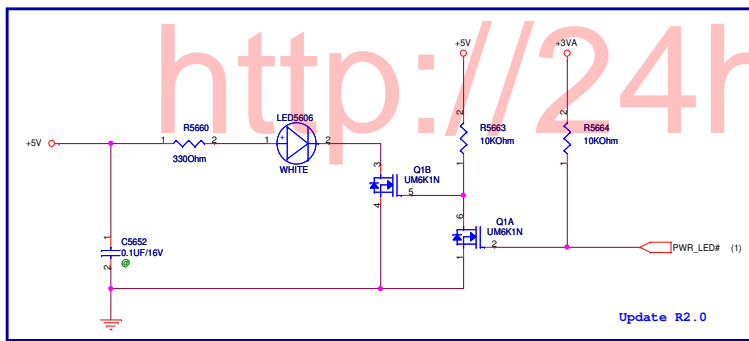

USB ports

