


Page	Title of schematic page	Rev.	Date
01	Page List	1A	
02	Block Diagram	1A	
03	Change List	1A	
04	SNB 1/4(HOST&PCIE)	1A	
05	SNB 2/4(DDR3 I/F)	1A	
06	SNB 3/4(POWER)	1A	
07	SNB 4/4(GND/Strap)	1A	
08	PCH 1/6(DMI/FDI/VIDEO)	1A	
09	PCH 2/6(SATA/RTC/HDA/LPC)	1A	
10	PCH 3/6(PCIE/USB/CLK/NV)	1A	
11	PCH 4/6(GPIO/CPU/STRAP)	1A	
12	PCH 5/6(POWER)	1A	
13	PCH 6/6 (GND)	1A	
14	DDR3L MEMORY DOWN(1RX8)	1A	
15	DDR3 DIMM-1-STD(5.2H)	1A	
16	NPCE985E & FLASH	1A	
17	LVDS/TS/NFC	1A	
18	CARD READER(RTS5209)	1A	
19	HDMI/THERMAL	1A	
20	USB	1A	
21	LAN RTL8111GS	1A	
22	WLAN/KB-BL	1A	
23	HDD/ODD/GSENSOR/TP/FAN	1A	
24	AUDIO(ALC233-CG)	1A	
25	LED/PS	1A	
26	POWER +VCC_CORE (ISL95837)	1A	
27	POWER 3VPCU&RVCC5(TPS51427)	1A	
28	POWER 1.35VSUS/VTT_MEM	1A	
29	POWER +1.05V(G5602R41U)-15A	1A	
30	POWER VCCSA/VCCIO	1A	
31	POWER VCC1.8/Thermal	1A	
32	POWER(BAT IN / ADA IN/ UL)	1A	
33	POWER CHARGER (ISL88731C)	1A	
34	POWER VGA_CORE/1.0(RT8812A)	1A	
35	POWER VCC1.5_VRAM/1.05V	1A	
36	NVIDIA N14 GB2-64 PCIE 1/4	1A	
37	NVIDIA N14 GB2-64 TMDS 2/4	1A	
38	NVIDIA N14 GB2-64 VRAM 3/4	1A	
39	NVIDIA N14 GB2-64 VRAM 4/4	1A	

Page	Title of schematic page	Rev.	Date
40	HOLE/EMI/KB	1A	
41	IO PORT LIST	1A	

* : No mount
 E@ : For DIS GFX only
 I@ : For INT GFX only

Chief River ULV BLOCK DIAGRAM

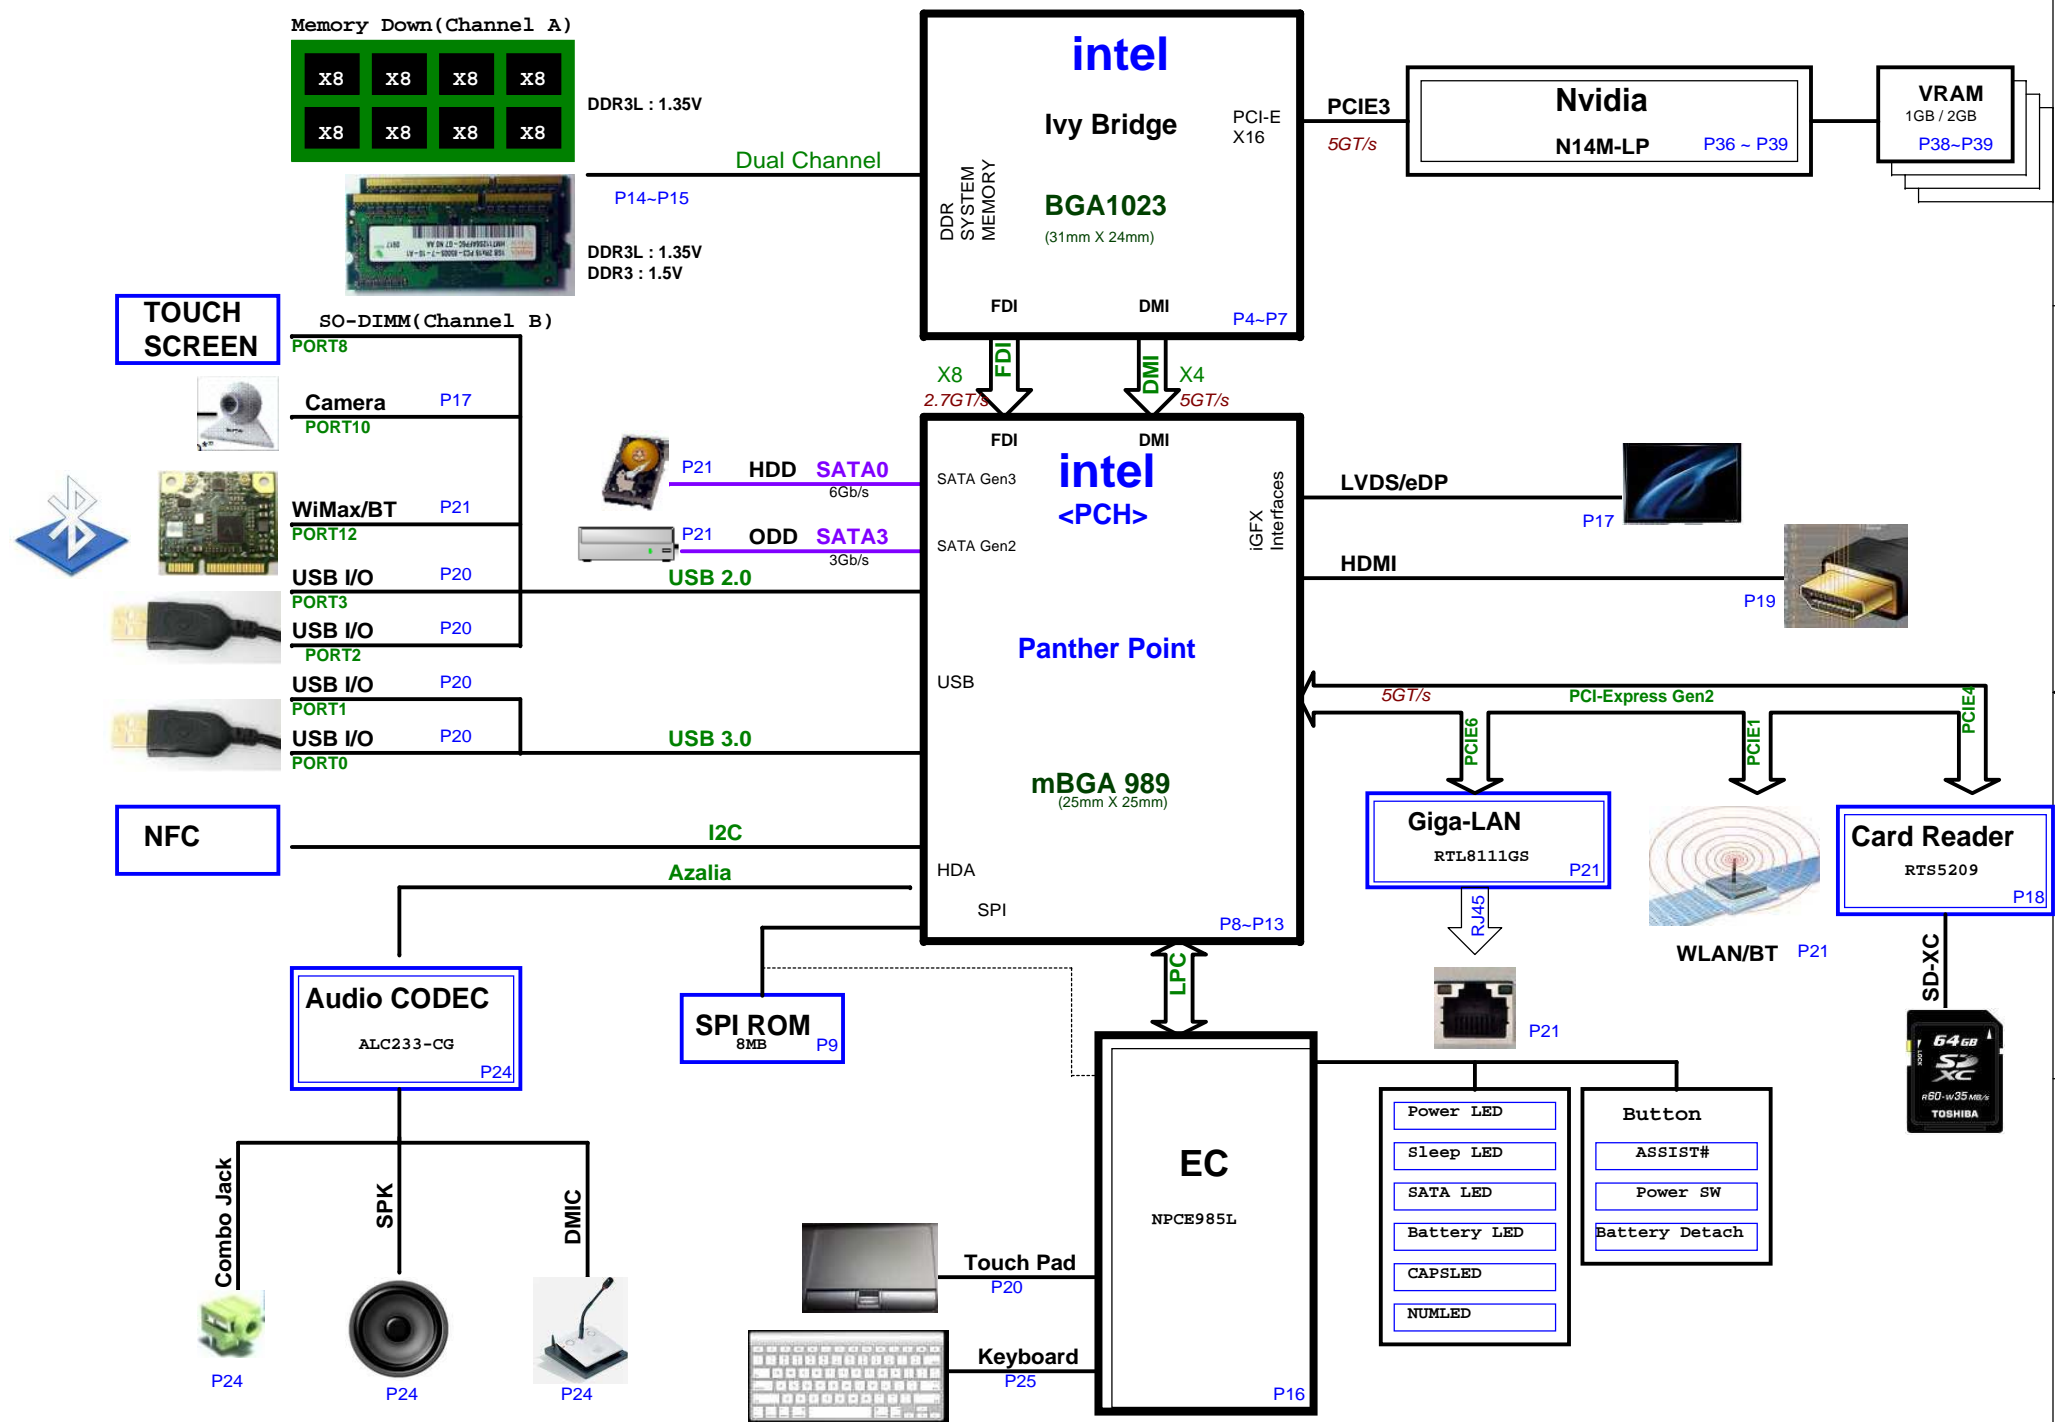



Change List
GD56 CH_EVT_001

Ivy Bridge Processor (DMI,PEG,FDI)

Ivy Bridge Processor (CLK,MISC,JTAG)


04

vinafix

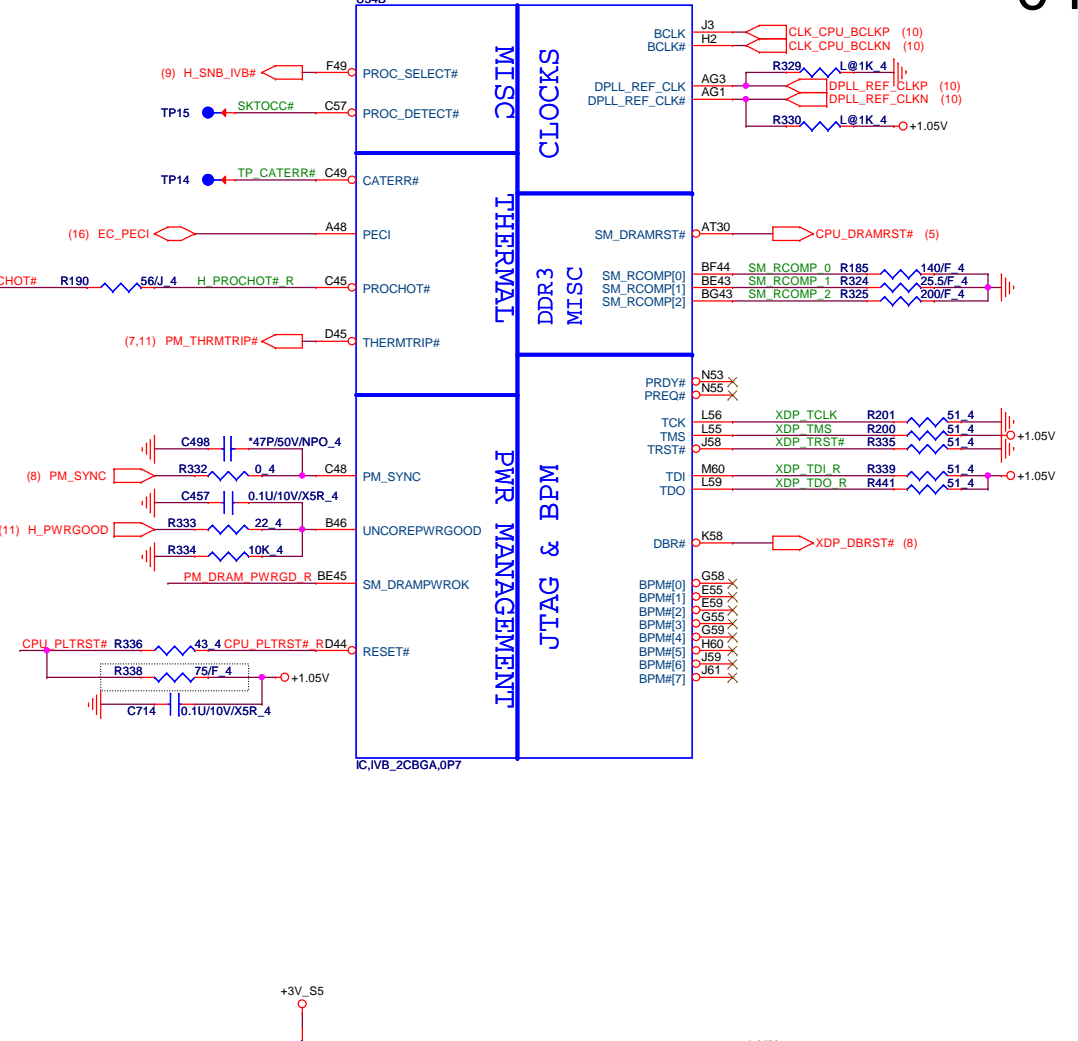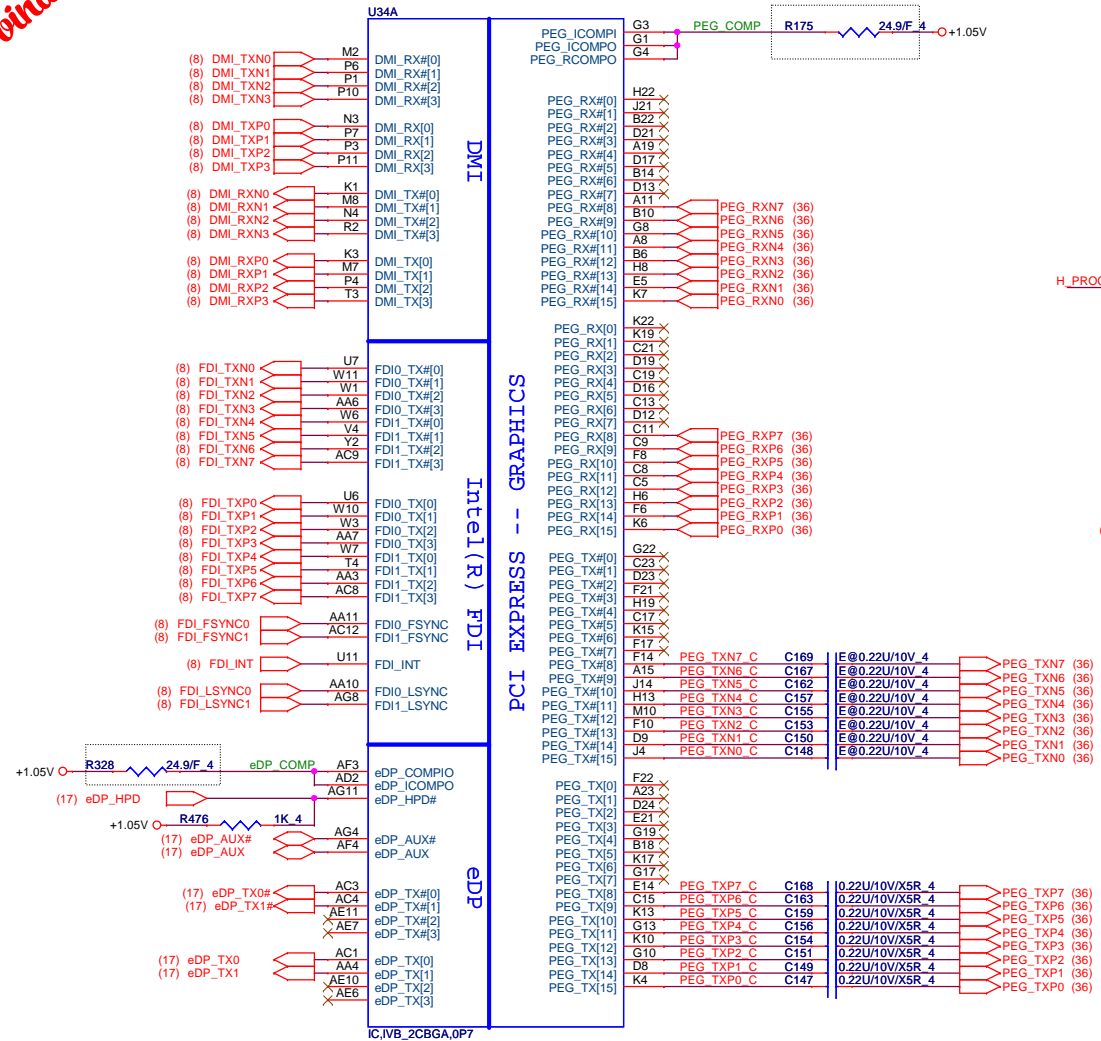

SNB_IVB#:
- It is NC when using Sandy Bridge.(1.05V)
- For next generation processor it will be grounded in package.(1.0V)

FDI Disabling (Discrete Only)
FDI_FSYNC (J18/J17/J19/H17) can gang all these 4 signals together and tie them with only one 1K resistor to GND (DG V0.5 Ch2.2.9).
FDI_INT connect to GND with 1K ohm.

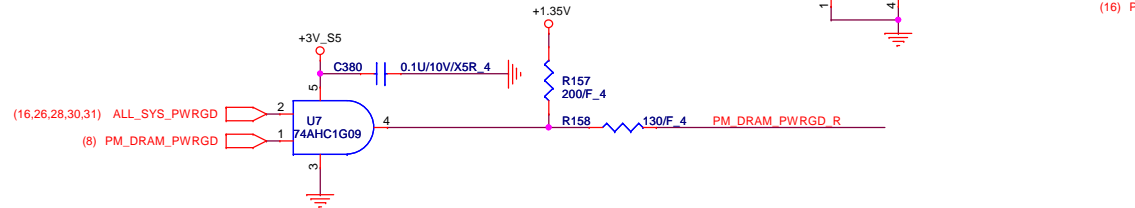



Quanta Computer Inc.
PROJECT : GD5

Size	Document Number	Rev
	SNB/IVB 1/4	1A
Date	Thursday, October 25, 2012	Sheet 4 of 41

<http://vinafix.vn>

Ivy Bridge Processor (DDR3)




05

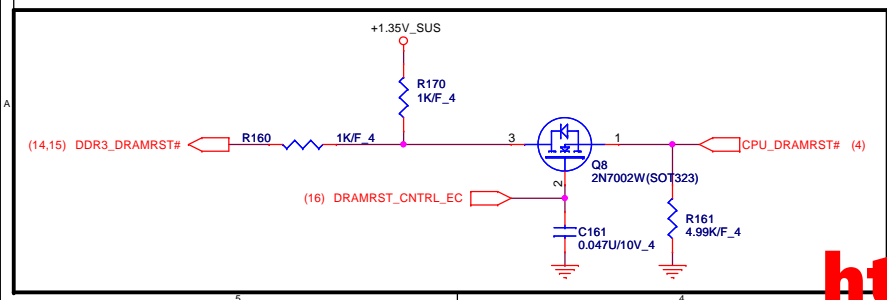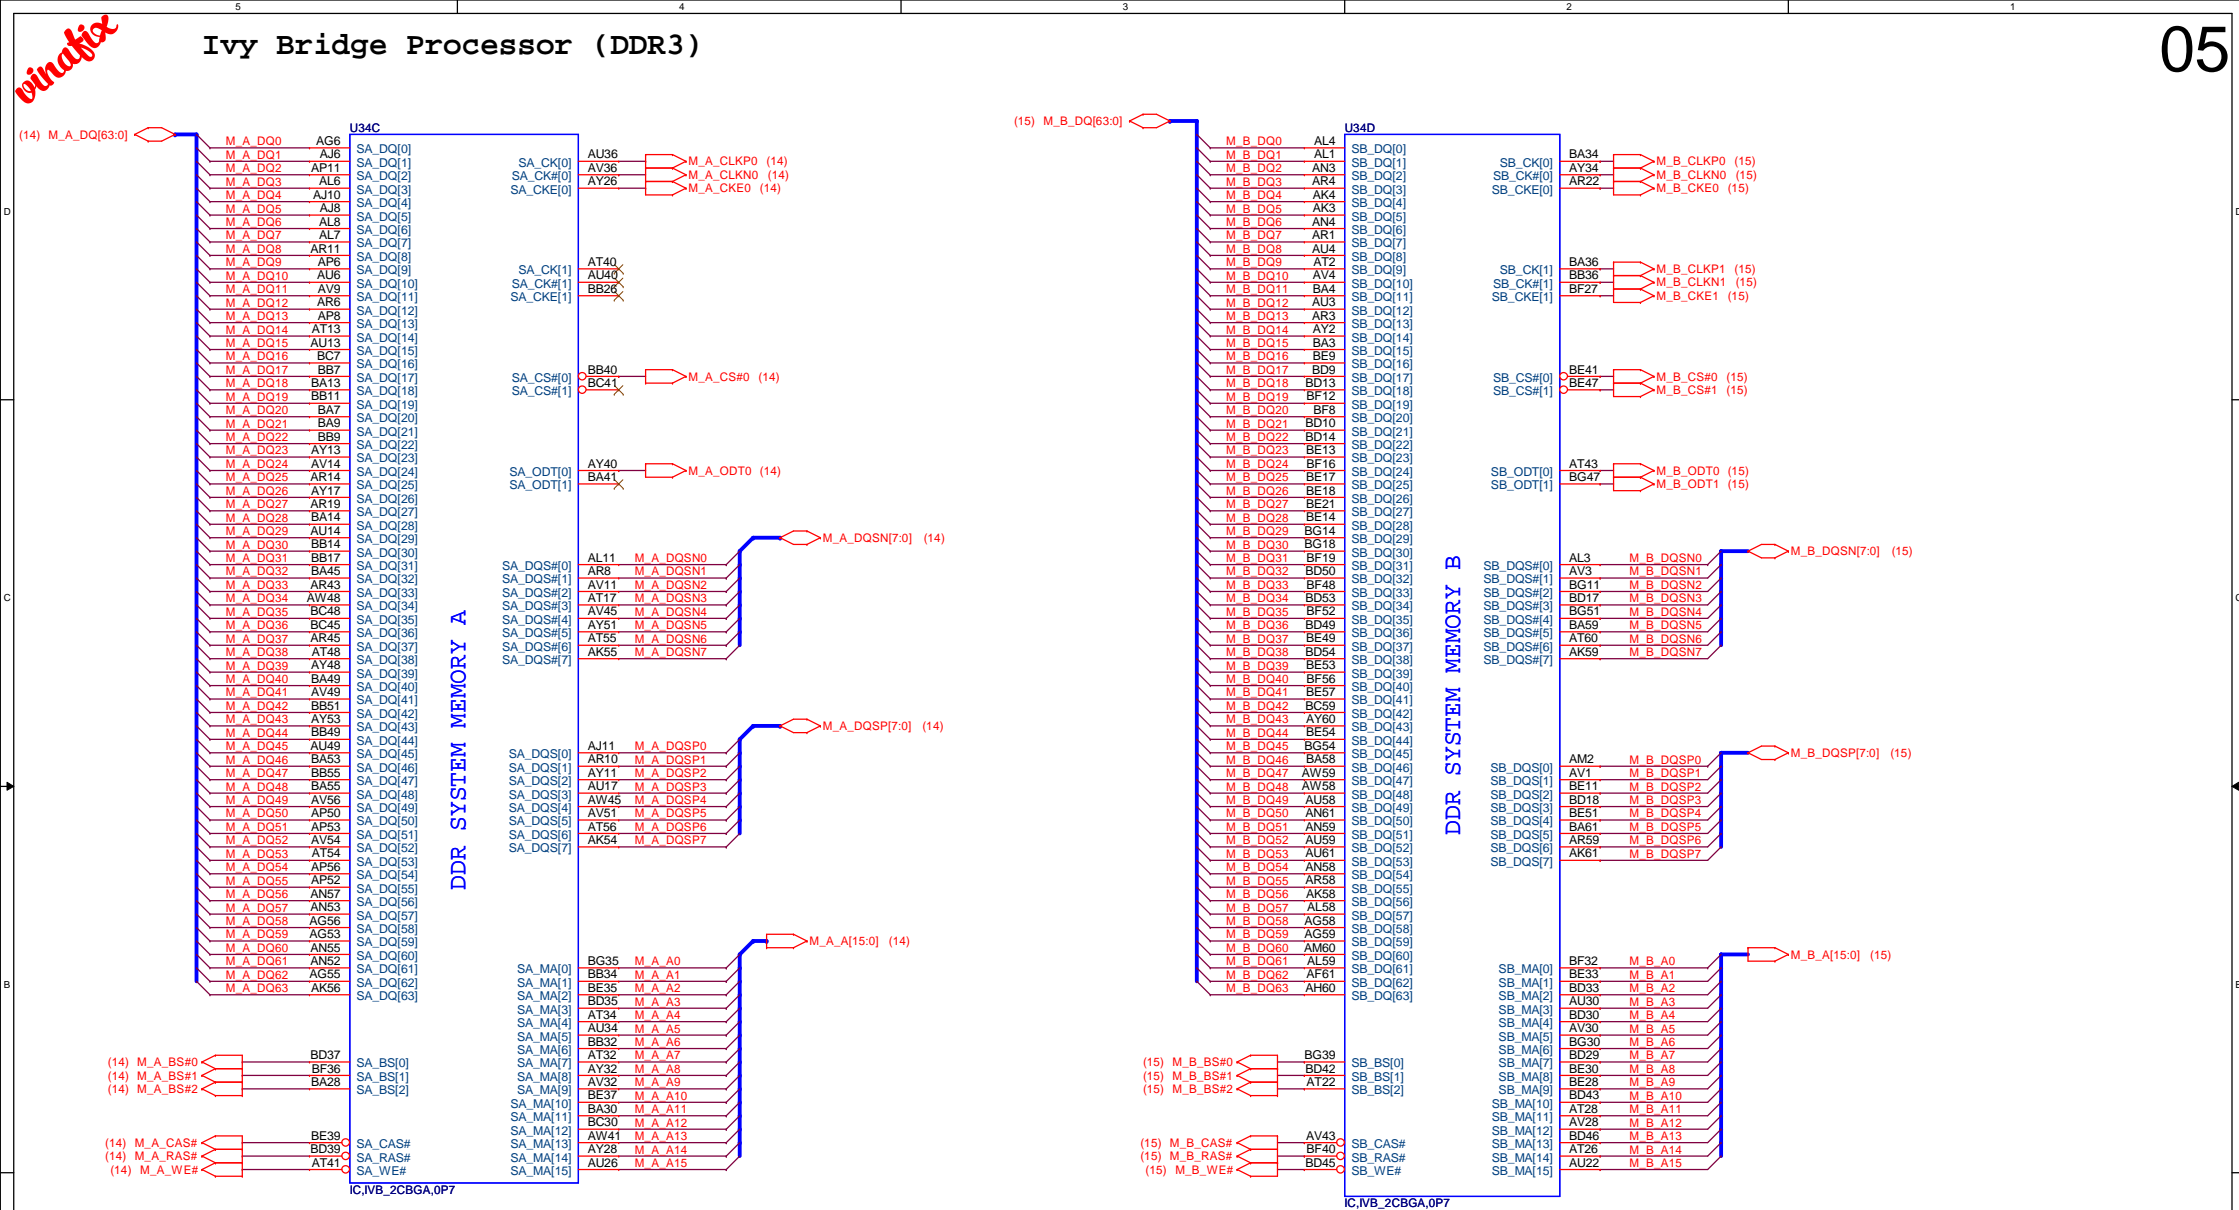

<http://vinafix.vn>

Ivy Bridge Processor (GND)


Ivy Bridge Processor (RESERVED, CFG)

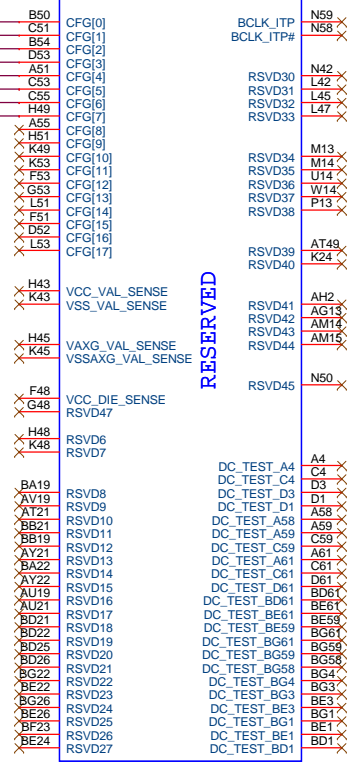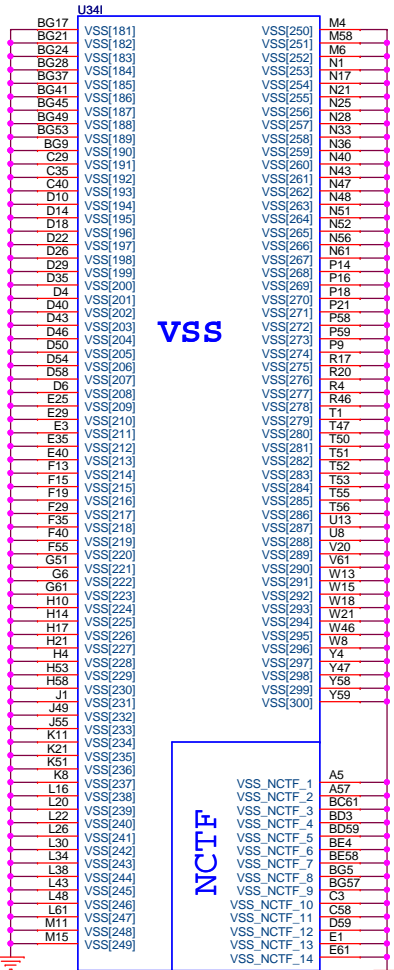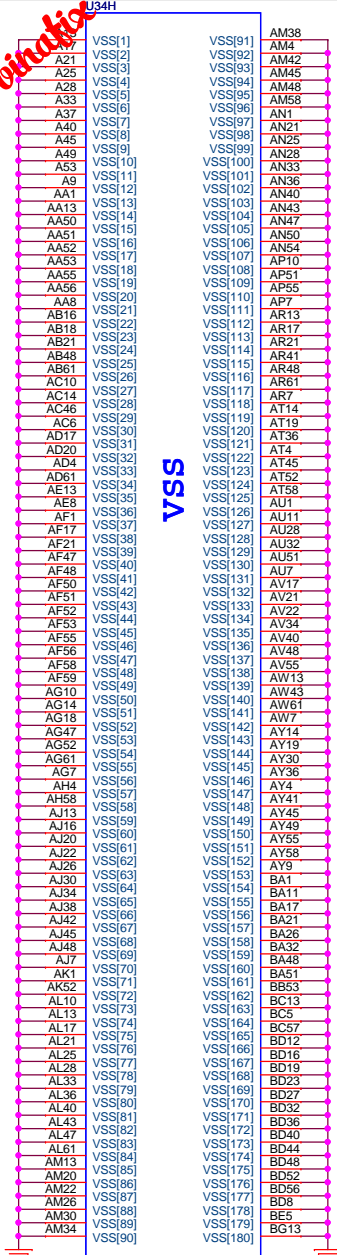


Processor Strapping

	1	0
CFG2 (PEG Static Lane Reversal)	Normal Operation	Lane Reversed
CFG4 (DP Presence Strap)	Disable; No physical DP attached to eDP	Enable; An ext DP device is connected to eDP
CFG7 (PEG Defer Training)	PEG train immediately following xxRESETB de assertion	PEG wait for BIOS training


CFG[6:5] (PCIe Port Bifurcation Straps)
11: (Default) x16 - X16 PEG interface
10: PEG x8 x8 bifurcation enabled/disabled
01: Reserved - (Device 1 function 1 disabled ; function 2 enabled)
00: x8,x4,x4 - Device 1 functions 1 and 2 enabled

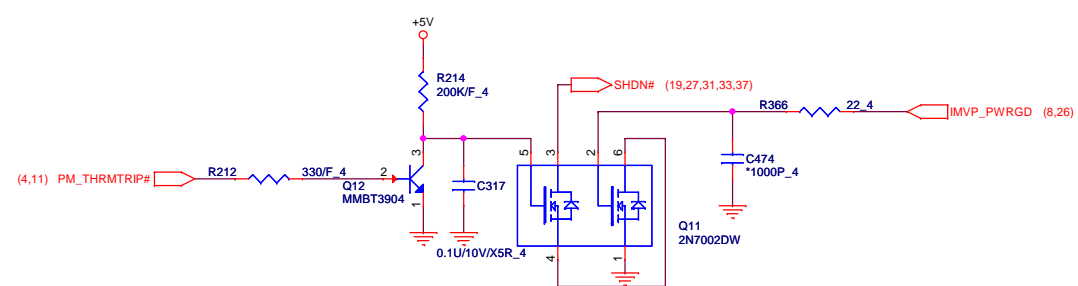

CPT/PPT (DMI, FDI, PM)

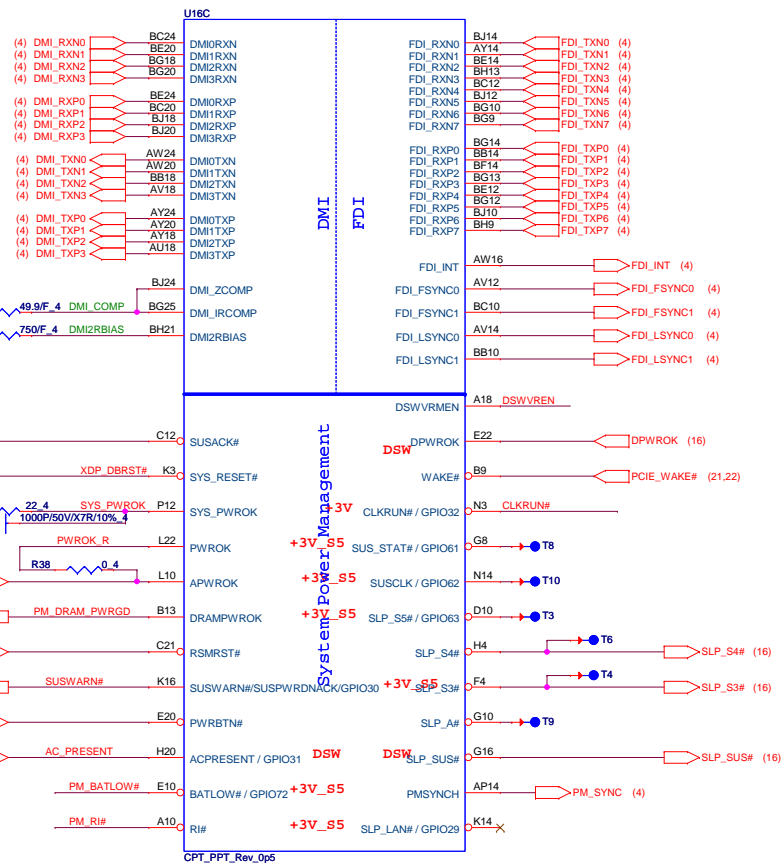

CPT/PPT (LVDS, DDI)

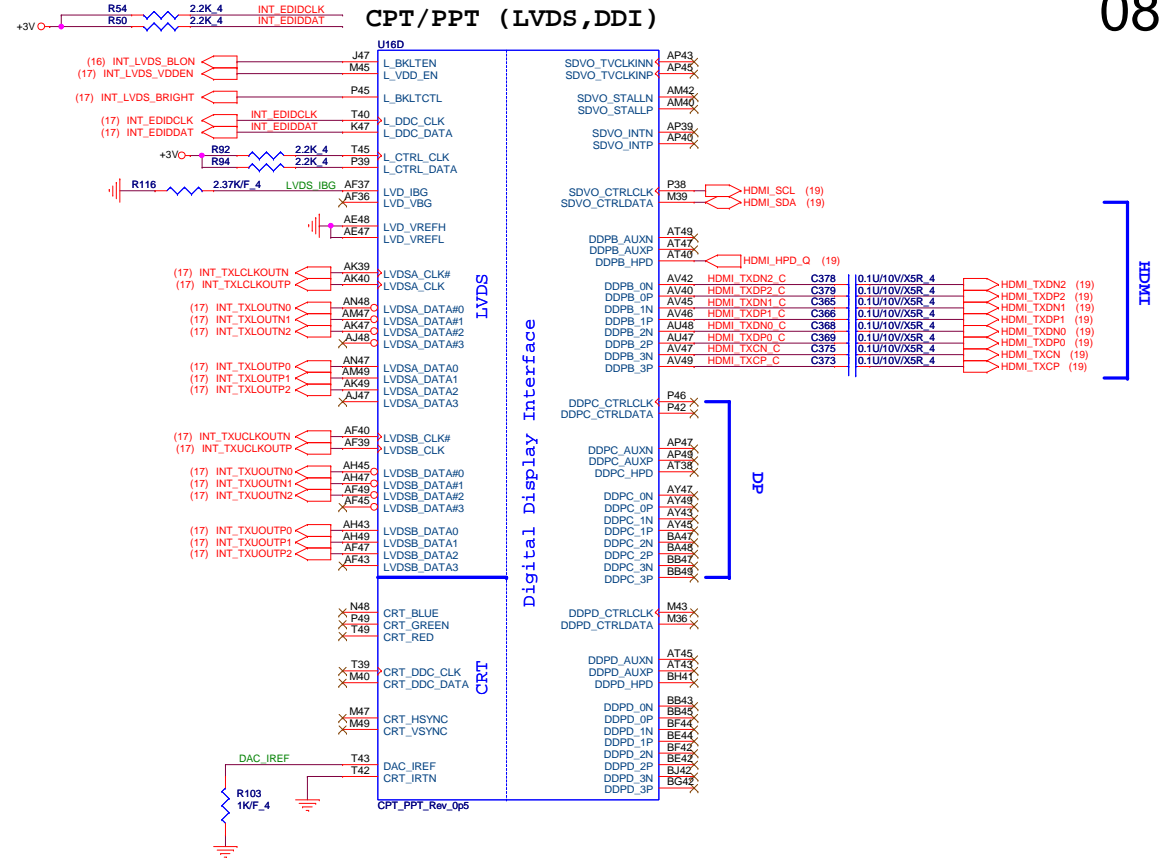

HDMI


C

B


A

1

PCH Pull-high/low(CLG)

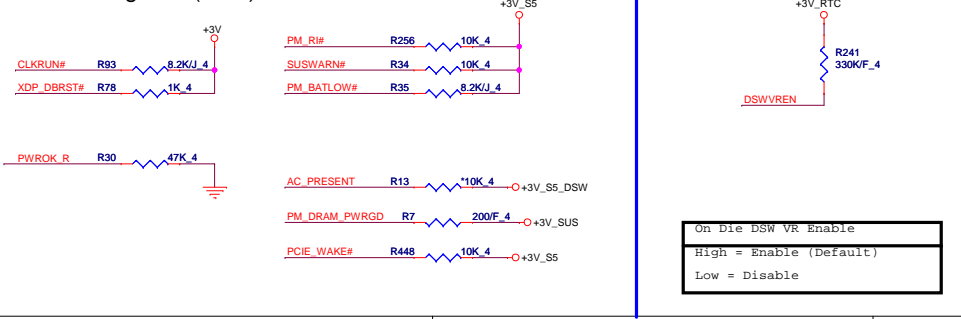

1. Level 1 Environment-related Substances should Never be Used.
2. Recycled Resin and Coated Wire should be procured from Green Partners.



Quanta Computer Inc.
PROJECT : GD5


Size Document Number

CPT/PTT 1/6

Date: Thursday, October 25, 2012 Sheet 8 of 41


Rev 1A

RTC Circuitry(RTC)

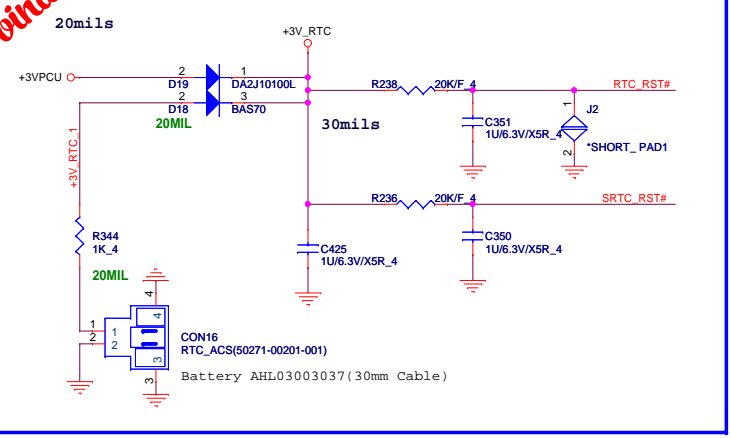

MX25L3205DM2I-12G: AKE39FP0Z00
W25X32VSSIG: AKE39ZP0N00

PCH SPI (CLG)

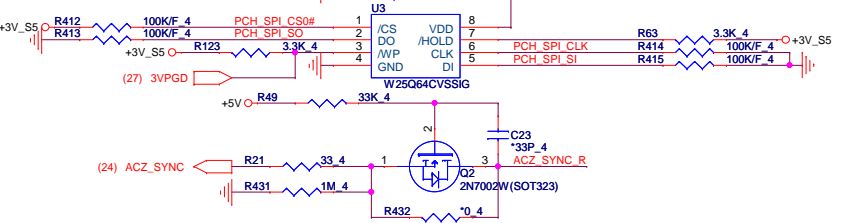


For NPCE885L Using

(16) F_CS0#_PCH	R121	0.4	PCH SPI CS0#
(16) F_SDI_PCH	R67	0.4	PCH SPI SO
(16) SCK_PCH	R65	0.4	PCH SPI CLK
(16) SD0_PCH	R122	0.4	PCH SPI SI


PCH Strap Table

Pin Name	Strap description	Sampled	Configuration	Note
SPKR	No reboot mode setting	PWROK	0 = Default (weak pull-down 20K) 1 = Setting to No-Reboot mode	SPKR
PCI_GNT3# / GPIO55	Top-Block Swap Override	PWROK	0 = "top-block swap" mode 1 = Default (weak pull-up 20K)	TP53
INTVRMEN	Integrated 1.05V VRM enable	ALWAYS	Should be always pull-up	+3V_RTC - R242 330K/F_4 PCH_INVRMEN
GNT1# / GPIO51	Boot BIOS Selection 1 [bit-1]	PWROK	Default weak pull-up on GNT0/1# [Need external pull-down for LPC BIOS]	
GPIO19	Boot BIOS Selection 0 [bit-0]	PWROK		
HDA_SDO	Flash Descriptor Security	PWROK	0 = Default (weak pull-down 20K) 1 = Enabled	ACZ_SDOUT_R
DF_TVS	DMI/FDI Termination voltage	PWROK	0 = Set to Vss for Ivy Bridge 1 = Set to Vcc for Sandy Bridge (weak pull-down 20K)	R140 2.2K_4 +1.8V R320 1K_4 NV_CLE (11) H_SN8_IVB# (4)
GPIO28	On-die PLL Voltage Regulator	RSMRST#	0 = Disable 1 = Enable (Default)	TP44
HDA_SYNC	On-Die PLL VR Voltage Select	RSMRST	0 = Support by 1.8V (weak pull-down) 1 = Support by 1.5V	+3V_S5 - R28 1K_4 ACZ_SYNC_R

CPT/PPT (HDA, JTAG, SATA)

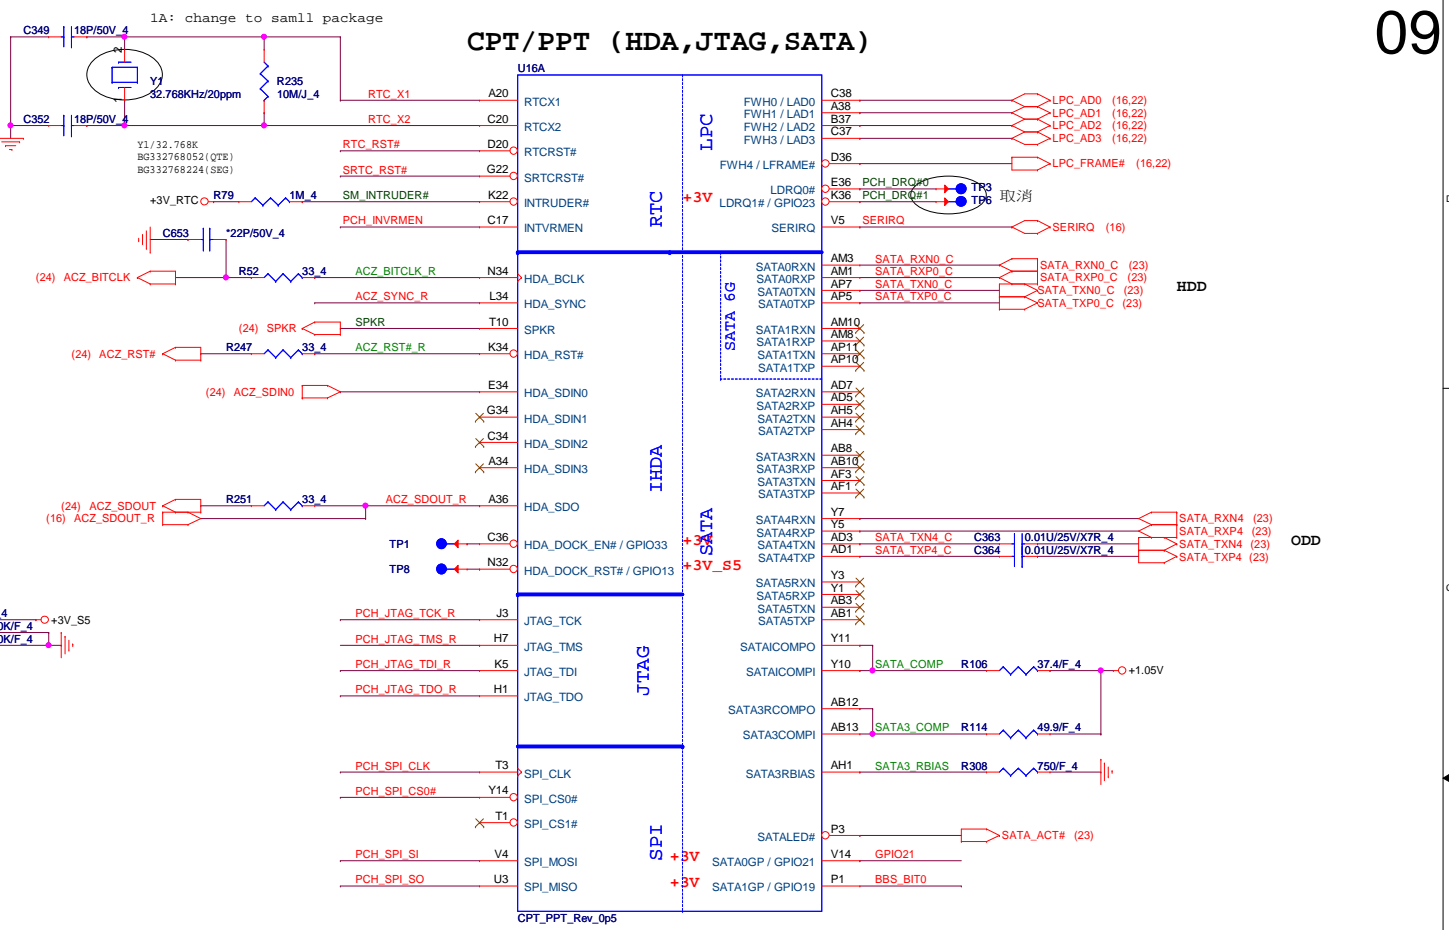

PCH JTAG Debug (CLG)

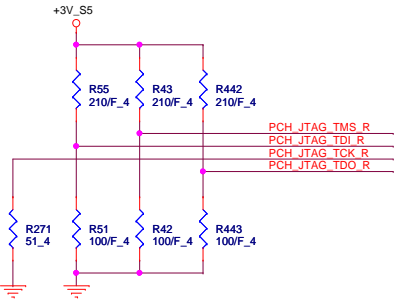

Quanta Computer Inc.
PROJECT : GD5
CPT/PPT 2/6

Date: Thursday, October 25, 2012
Sheet 9 of 41




Rev 1A

vinafix

CPT/PPT (GPIO,VSS_NCTF,RSVD)


GPIO Pull-up/Pull-down(CLG)

11



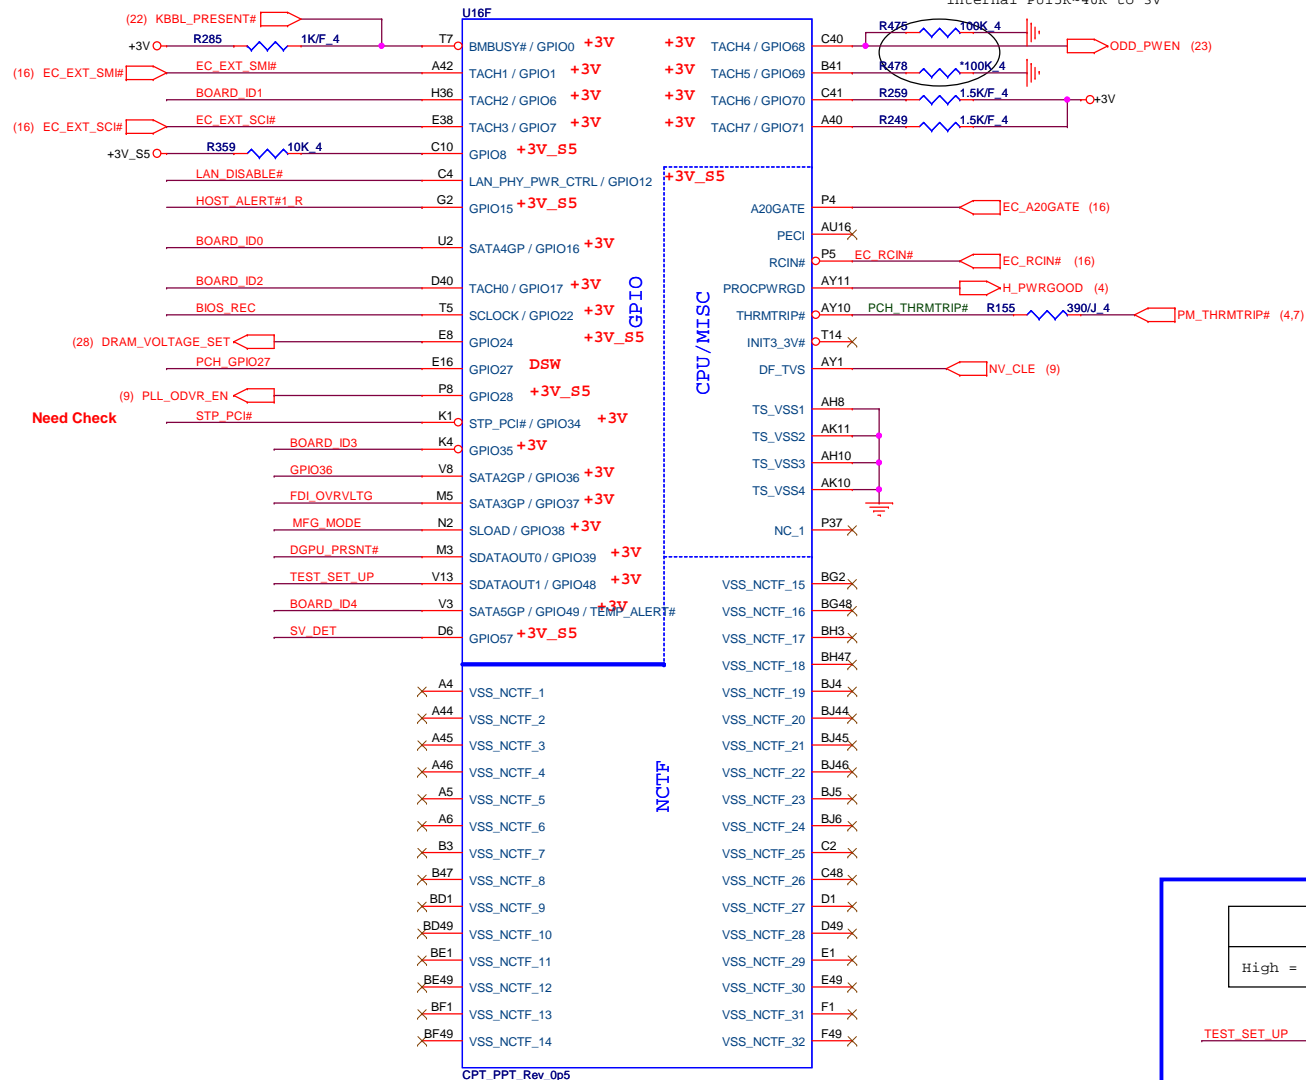


	0	1
Board ID0	CaspicCRA1/CRB1 HK8/9	SuperiorCRA1/CRB1 GD5/6
Board ID1	14"	15"


	Board ID2	Board ID3	Board ID4
SAM 2G	0	0	1
SAM 4G	0	1	0
HYN 2G	0	1	1
HYN 4G	1	0	0
ELP 2G	1	0	1
ELP 4G	1	1	0




PCBA SKU	Discrete	UMA
R277(Pull High)	Stuff	No Stuff
R275(Pull Low)	No Stuff	Stuff




MFG-TEST

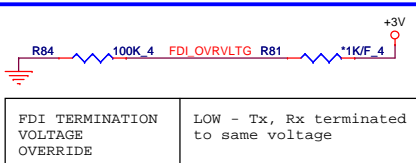

FDI TERMINATION VOLTAGE OVERRIDE
LOW - Tx, Rx terminated to same voltage

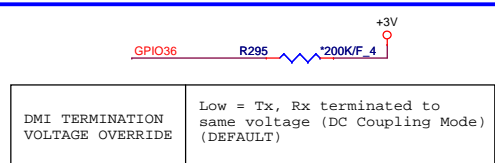

DMI TERMINATION VOLTAGE OVERRIDE
Low = Tx, Rx terminated to same voltage (DC Coupling Mode) (DEFAULT)

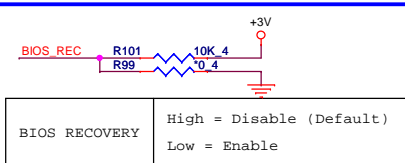

BIOS RECOVERY
High = Disable (Default)
Low = Enable

<http://vinafix.vn>



Quanta Computer Inc.
PROJECT : GD5


vinafix

CPT/PPT (GND)





H5			U16H		
AA17	VSS[1]	VSS[80]	AA17	VSS[0]	AK38
AA2	VSS[2]	VSS[81]	AA2	VSS[1]	AK4
AA3	VSS[3]	VSS[82]	AA3	VSS[2]	AK42
AA33	VSS[4]	VSS[83]	AA33	VSS[3]	AK46
AA34	VSS[5]	VSS[84]	AA34	VSS[4]	AK8
AB11	VSS[6]	VSS[85]	AB11	VSS[5]	AL16
AB14	VSS[7]	VSS[86]	AB14	VSS[6]	AL17
AB39	VSS[8]	VSS[87]	AB39	VSS[7]	AL19
AB4	VSS[9]	VSS[88]	AB4	VSS[8]	AL2
AB43	VSS[10]	VSS[89]	AB43	VSS[9]	AL21
AB5	VSS[11]	VSS[90]	AB5	VSS[10]	AL23
AB7	VSS[12]	VSS[91]	AB7	VSS[11]	AL26
AC19	VSS[13]	VSS[92]	AC19	VSS[12]	AL27
AC2	VSS[14]	VSS[93]	AC2	VSS[13]	BB22
AC21	VSS[15]	VSS[94]	AC21	VSS[14]	BB24
AC24	VSS[16]	VSS[95]	AC24	VSS[15]	BB28
AC33	VSS[17]	VSS[96]	AC33	VSS[16]	BB30
AC34	VSS[18]	VSS[97]	AC34	VSS[17]	BB38
AC48	VSS[19]	VSS[98]	AC48	VSS[18]	BB4
AD10	VSS[20]	VSS[99]	AD10	VSS[19]	BB44
AD11	VSS[21]	VSS[100]	AD11	VSS[20]	BB46
AD12	VSS[22]	VSS[101]	AD12	VSS[21]	BC14
AD13	VSS[23]	VSS[102]	AD13	VSS[22]	BC18
AD19	VSS[24]	VSS[103]	AD19	VSS[23]	BC2
AD24	VSS[25]	VSS[104]	AD24	VSS[24]	BC22
AD26	VSS[26]	VSS[105]	AD26	VSS[25]	BC26
AD27	VSS[27]	VSS[106]	AD27	VSS[26]	BC32
AD33	VSS[28]	VSS[107]	AD33	VSS[27]	BC34
AD34	VSS[29]	VSS[108]	AD34	VSS[28]	BC36
AD36	VSS[30]	VSS[109]	AD36	VSS[29]	BC40
AD37	VSS[31]	VSS[110]	AD37	VSS[30]	BC42
AD38	VSS[32]	VSS[111]	AD38	VSS[31]	BC48
AD39	VSS[33]	VSS[112]	AD39	VSS[32]	BD46
AD4	VSS[34]	VSS[113]	AD4	VSS[33]	BD5
AD40	VSS[35]	VSS[114]	AD40	VSS[34]	BE22
AD42	VSS[36]	VSS[115]	AD42	VSS[35]	BE26
AD43	VSS[37]	VSS[116]	AD43	VSS[36]	BE40
AD45	VSS[38]	VSS[117]	AD45	VSS[37]	BF10
AD46	VSS[39]	VSS[118]	AD46	VSS[38]	BF12
AD6	VSS[40]	VSS[119]	AD6	VSS[39]	BF16
AE2	VSS[41]	VSS[120]	AE2	VSS[40]	BF20
AE3	VSS[42]	VSS[121]	AE3	VSS[41]	BF22
AF10	VSS[43]	VSS[122]	AF10	VSS[42]	BF24
AF12	VSS[44]	VSS[123]	AF12	VSS[43]	BF26
AD14	VSS[45]	VSS[124]	AD14	VSS[44]	BF28
AD16	VSS[46]	VSS[125]	AD16	VSS[45]	BD3
AF16	VSS[47]	VSS[126]	AF16	VSS[46]	BD33
AF19	VSS[48]	VSS[127]	AF19	VSS[47]	BD44
AF24	VSS[49]	VSS[128]	AF24	VSS[48]	BD8
AF26	VSS[50]	VSS[129]	AF26	VSS[49]	BG17
AF27	VSS[51]	VSS[130]	AF27	VSS[50]	BG21
AF29	VSS[52]	VSS[131]	AF29	VSS[51]	BG33
AF31	VSS[53]	VSS[132]	AF31	VSS[52]	BG44
AF38	VSS[54]	VSS[133]	AF38	VSS[53]	BG8
AF4	VSS[55]	VSS[134]	AF4	VSS[54]	BH11
AF42	VSS[56]	VSS[135]	AF42	VSS[55]	BH15
AF46	VSS[57]	VSS[136]	AF46	VSS[56]	BH17
AF5	VSS[58]	VSS[137]	AF5	VSS[57]	BH19
AF7	VSS[59]	VSS[138]	AF7	VSS[58]	H10
AF8	VSS[60]	VSS[139]	AF8	VSS[59]	AV30
AG19	VSS[61]	VSS[140]	AG19	VSS[60]	AV38
AG2	VSS[62]	VSS[141]	AG2	VSS[61]	AV4
AG31	VSS[63]	VSS[142]	AG31	VSS[62]	AV43
AG48	VSS[64]	VSS[143]	AG48	VSS[63]	AV8
AH11	VSS[65]	VSS[144]	AH11	VSS[64]	AW14
AH3	VSS[66]	VSS[145]	AH3	VSS[65]	AW18
AH36	VSS[67]	VSS[146]	AH36	VSS[66]	AW2
AH39	VSS[68]	VSS[147]	AH39	VSS[67]	AW22
AH40	VSS[69]	VSS[148]	AH40	VSS[68]	AW26
AH42	VSS[70]	VSS[149]	AH42	VSS[69]	AW28
AH46	VSS[71]	VSS[150]	AH46	VSS[70]	AW32
AH7	VSS[72]	VSS[151]	AH7	VSS[71]	AW34
AJ19	VSS[73]	VSS[152]	AJ19	VSS[72]	D26
AJ21	VSS[74]	VSS[153]	AJ21	VSS[73]	D30
AJ24	VSS[75]	VSS[154]	AJ24	VSS[74]	D32
AJ33	VSS[76]	VSS[155]	AJ33	VSS[75]	D34
AJ34	VSS[77]	VSS[156]	AJ34	VSS[76]	D38
AK12	VSS[78]	VSS[157]	AK12	VSS[77]	D42
AK3	VSS[79]	VSS[158]	AK3	VSS[78]	D8

U16I


AY4			VSS[159]			H46		
AY42	VSS[160]	VSS[259]	AY42	VSS[160]	VSS[259]	H46	VSS[259]	K18
AY46	VSS[161]	VSS[260]	AY46	VSS[161]	VSS[260]	K18	VSS[260]	K26
AY8	VSS[162]	VSS[261]	AY8	VSS[162]	VSS[261]	K26	VSS[261]	K39
B11	VSS[163]	VSS[262]	B11	VSS[163]	VSS[262]	K39	VSS[262]	K46
B15	VSS[164]	VSS[263]	B15	VSS[164]	VSS[263]	K46	VSS[263]	K7
B19	VSS[165]	VSS[264]	B19	VSS[165]	VSS[264]	K7	VSS[264]	L18
B23	VSS[166]	VSS[265]	B23	VSS[166]	VSS[265]	L18	VSS[265]	L2
B27	VSS[167]	VSS[266]	B27	VSS[167]	VSS[266]	L2	VSS[266]	L20
B31	VSS[168]	VSS[267]	B31	VSS[168]	VSS[267]	L20	VSS[267]	L26
B35	VSS[169]	VSS[268]	B35	VSS[169]	VSS[268]	L26	VSS[268]	L28
B39	VSS[170]	VSS[269]	B39	VSS[170]	VSS[269]	L28	VSS[269]	L36
B7	VSS[171]	VSS[270]	B7	VSS[171]	VSS[270]	L36	VSS[270]	L48
F45	VSS[172]	VSS[271]	F45	VSS[172]	VSS[271]	L48	VSS[271]	M12
BB12	VSS[173]	VSS[272]	BB12	VSS[173]	VSS[272]	M12	VSS[272]	P16
BB16	VSS[174]	VSS[273]	BB16	VSS[174]	VSS[273]	P16	VSS[273]	M18
BB20	VSS[175]	VSS[274]	BB20	VSS[175]	VSS[274]	M18	VSS[274]	M22
AL31	VSS[176]	VSS[275]	AL31	VSS[176]	VSS[275]	M22	VSS[275]	M24
BB24	VSS[177]	VSS[276]	BB24	VSS[177]	VSS[276]	M24	VSS[276]	M30
BB28	VSS[178]	VSS[277]	BB28	VSS[178]	VSS[277]	M30	VSS[277]	M32
BB30	VSS[179]	VSS[278]	BB30	VSS[179]	VSS[278]	M32	VSS[278]	M34
BB38	VSS[180]	VSS[279]	BB38	VSS[180]	VSS[279]	M34	VSS[279]	M38
BB4	VSS[181]	VSS[280]	BB4	VSS[181]	VSS[280]	M38	VSS[280]	M4
BB44	VSS[182]	VSS[281]	BB44	VSS[182]	VSS[281]	M4	VSS[281]	M42
BB46	VSS[183]	VSS[282]	BB46	VSS[183]	VSS[282]	M42	VSS[282]	M46
BC14	VSS[184]	VSS[283]	BC14	VSS[184]	VSS[283]	M46	VSS[283]	M8
BC18	VSS[185]	VSS[284]	BC18	VSS[185]	VSS[284]	M8	VSS[284]	N18
BC2	VSS[186]	VSS[285]	BC2	VSS[186]	VSS[285]	N18	VSS[285]	P30
BC22	VSS[187]	VSS[286]	BC22	VSS[187]	VSS[286]	P30	VSS[286]	N47
BC26	VSS[188]	VSS[287]	BC26	VSS[188]	VSS[287]	N47	VSS[287]	P11
BC32	VSS[189]	VSS[288]	BC32	VSS[189]	VSS[288]	P11	VSS[288]	P18
BC34	VSS[190]	VSS[289]	BC34	VSS[190]	VSS[289]	P18	VSS[289]	T33
BC36	VSS[191]	VSS[290]	BC36	VSS[191]	VSS[290]	T33	VSS[290]	P40
BC40	VSS[192]	VSS[291]	BC40	VSS[192]	VSS[291]	P40	VSS[291]	P43
BC42	VSS[193]	VSS[292]	BC42	VSS[193]	VSS[292]	P43	VSS[292]	P47
BC48	VSS[194]	VSS[293]	BC48	VSS[194]	VSS[293]	P47	VSS[293]	P7
BD46	VSS[195]	VSS[294]	BD46	VSS[195]	VSS[294]	P7	VSS[294]	R2
BD5	VSS[196]	VSS[295]	BD5	VSS[196]	VSS[295]	R2	VSS[295]	R48
BE22	VSS[197]	VSS[296]	BE22	VSS[197]	VSS[296]	R48	VSS[296]	T12
BE26	VSS[198]	VSS[297]	BE26	VSS[198]	VSS[297]	T12	VSS[297]	T31
BE40	VSS[199]	VSS[298]	BE40	VSS[199]	VSS[298]	T31	VSS[298]	T37
BF10	VSS[200]	VSS[299]	BF10	VSS[200]	VSS[299]	T37	VSS[299]	T4
BF12	VSS[201]	VSS[300]	BF12	VSS[201]	VSS[300]	T4	VSS[300]	V34
BF16	VSS[202]	VSS[301]	BF16	VSS[202]	VSS[301]	V34	VSS[301]	V46
BF20	VSS[203]	VSS[302]	BF20	VSS[203]	VSS[302]	V46	VSS[302]	T47
BF22	VSS[204]	VSS[303]	BF22	VSS[204]	VSS[303]	T47	VSS[303]	T8
BF24	VSS[205]	VSS[304]	BF24	VSS[205]	VSS[304]	T8	VSS[304]	V11
BF26	VSS[206]	VSS[305]	BF26	VSS[206]	VSS[305]	V11	VSS[305]	V17
BF28	VSS[207]	VSS[306]	BF28	VSS[207]	VSS[306]	V17	VSS[306]	V26
BD3	VSS[208]	VSS[307]	BD3	VSS[208]	VSS[307]	V26	VSS[307]	V27
BD33	VSS[209]	VSS[308]	BD33	VSS[209]	VSS[308]	V27	VSS[308]	V29
BD44	VSS[210]	VSS[309]	BD44	VSS[210]	VSS[309]	V29	VSS[309]	V31
BD8	VSS[211]	VSS[310]	BD8	VSS[211]	VSS[310]	V31	VSS[310]	V36
BG17	VSS[212]	VSS[311]	BG17	VSS[212]	VSS[311]	V36	VSS[311]	V39
BG21	VSS[213]	VSS[312]	BG21	VSS[213]	VSS[312]	V39	VSS[312]	V43
BG33	VSS[214]	VSS[313]	BG33	VSS[214]	VSS[313]	V43	VSS[313]	V7
BG44	VSS[215]	VSS[314]	BG44	VSS[215]	VSS[314]	V7	VSS[314]	W17
BG8	VSS[216]	VSS[315]	BG8	VSS[216]	VSS[315]	W17	VSS[315]	W19
BH11	VSS[217]	VSS[316]	BH11	VSS[217]	VSS[316]	W19	VSS[316]	W2
BH15	VSS[218]	VSS[317]	BH15	VSS[218]	VSS[317]	W2	VSS[317]	W27
BH17	VSS[219]	VSS[318]	BH17	VSS[219]	VSS[318]	W27	VSS[318]	W48
BH19	VSS[220]	VSS[319]	BH19	VSS[220]	VSS[319]	W48	VSS[319]	Y12
H10	VSS[221]	VSS[320]	H10	VSS[221]	VSS[320]	Y12	VSS[320]	Y38
AV30	VSS[222]	VSS[321]	AV30	VSS[222]	VSS[321]	Y38	VSS[321]	Y4
AV38	VSS[223]	VSS[322]	AV38	VSS[223]	VSS[322]	Y4	VSS[322]	Y42
AV4	VSS[224]	VSS[323]	AV4	VSS[224]	VSS[323]	Y42	VSS[323]	Y46
AV43	VSS[225]	VSS[324]	AV43	VSS[225]	VSS[324]	Y46	VSS[324]	Y8
AV8	VSS[226]	VSS[325]	AV8	VSS[226]	VSS[325]	Y8	VSS[325]	BG29
AW14	VSS[227]	VSS[326]	AW14	VSS[227]	VSS[326]	BG29	VSS[326]	N24
AW18	VSS[228]	VSS[327]	AW18	VSS[228]	VSS[327]	N24	VSS[327]	AJ3
AW2	VSS[229]	VSS[328]	AW2	VSS[229]	VSS[328]	AJ3	VSS[328]	AD47
AW22	VSS[230]	VSS[329]	AW22	VSS[230]	VSS[329]	AD47	VSS[329]	B43
AW26	VSS[231]	VSS[330]	AW26	VSS[231]	VSS[330]	B43	VSS[330]	BE10
AW28	VSS[232]	VSS[331]	AW28	VSS[232]	VSS[331]	BE10	VSS[331]	BG41
AW32	VSS[233]	VSS[332]	AW32	VSS[233]	VSS[332]	BG41	VSS[332]	G14
AW34	VSS[234]	VSS[333]	AW34	VSS[234]	VSS[333]	G14	VSS[333]	H16
D26	VSS[235]	VSS[334]	D26	VSS[235]	VSS[334]	H16	VSS[334]	T36
D30	VSS[236]	VSS[335]	D30	VSS[236]	VSS[335]	T36	VSS[335]	BG22
D32	VSS[237]	VSS[336]	D32	VSS[237]	VSS[336]	BG22	VSS[336]	BG24
D34	VSS[238]	VSS[337]	D34	VSS[238]	VSS[337]	BG24	VSS[337]	C22
D38	VSS[239]	VSS[338]	D38	VSS[239]	VSS[338]	C22	VSS[338]	AP13
D42	VSS[240]	VSS[339]	D42	VSS[240]	VSS[339]	AP13	VSS[339]	M14
D8	VSS[241]	VSS[340]	D8	VSS[241]	VSS[340]	M14	VSS[340]	AP3
E18	VSS[242]	VSS[341]	E18	VSS[242]	VSS[341]	AP3	VSS[341]	AP1
E26	VSS[243]	VSS[342]	E26	VSS[243]	VSS[342]	AP1	VSS[342]	BE16
G18	VSS[244]	VSS[343]	G18	VSS[244]	VSS[343]	BE16	VSS[343]	BC16
G20	VSS[245]	VSS[344]	G20	VSS[245]	VSS[344]	BC16	VSS[344]	BC28
G26	VSS[246]	VSS[345]	G26	VSS[246]	VSS[345]	BC28	VSS[345]	BJ28
G36	VSS[247]	VSS[346]	G36	VSS[247]	VSS[346]	BJ28	VSS[346]	VSS[352]
G48	VSS[248]	VSS[347]	G48	VSS[248]	VSS[347]	VSS[352]		
H12	VSS[249]	VSS[348]	H12	VSS[249]	VSS[348]			
H18	VSS[250]	VSS[349]	H18	VSS[250]	VSS[349]			
H22	VSS[251]	VSS[350]	H22	VSS[251]	VSS[350]			
H24	VSS[252]	VSS[351]	H24	VSS[252]				

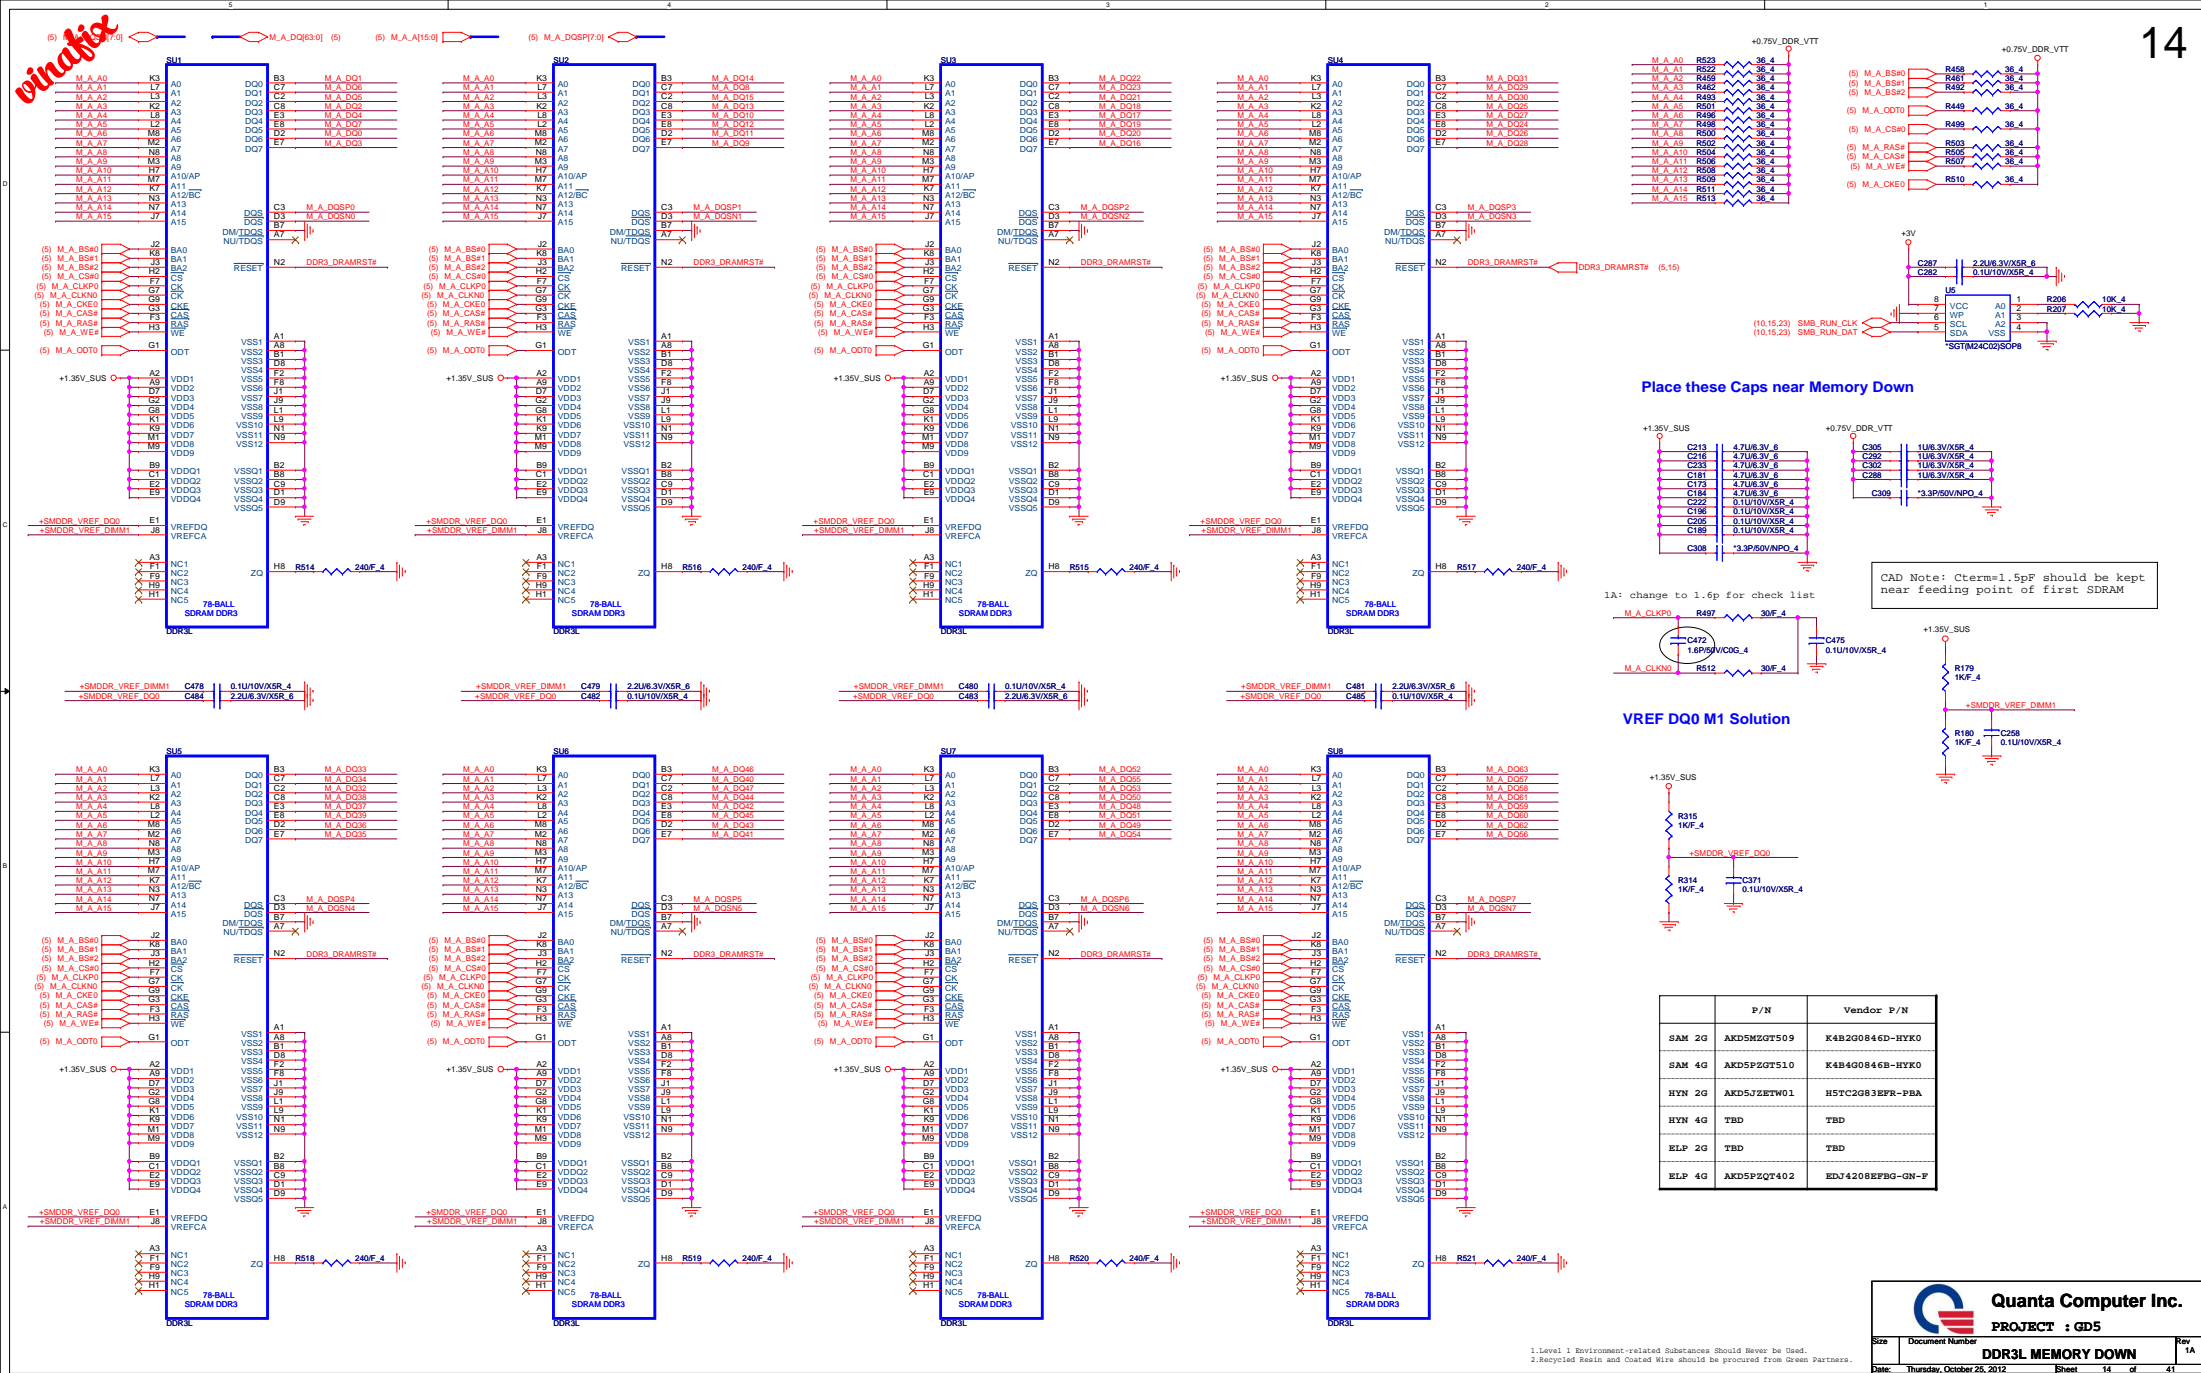


DDR3 RVS (DDR)

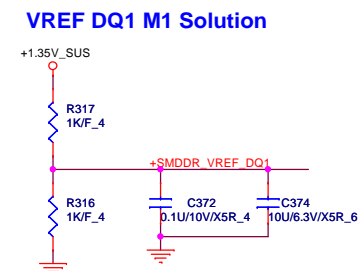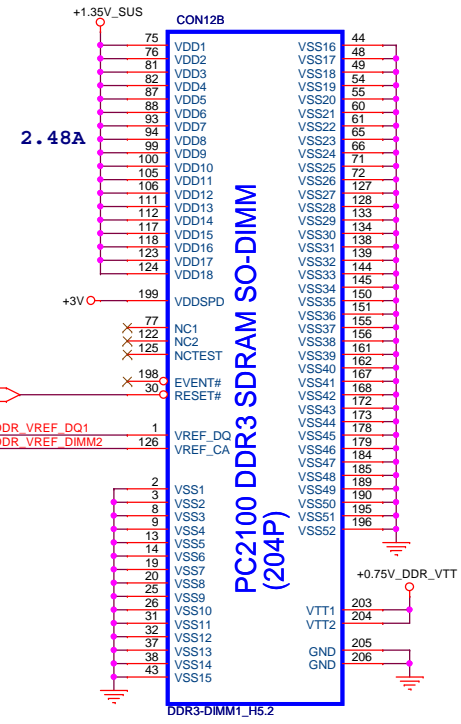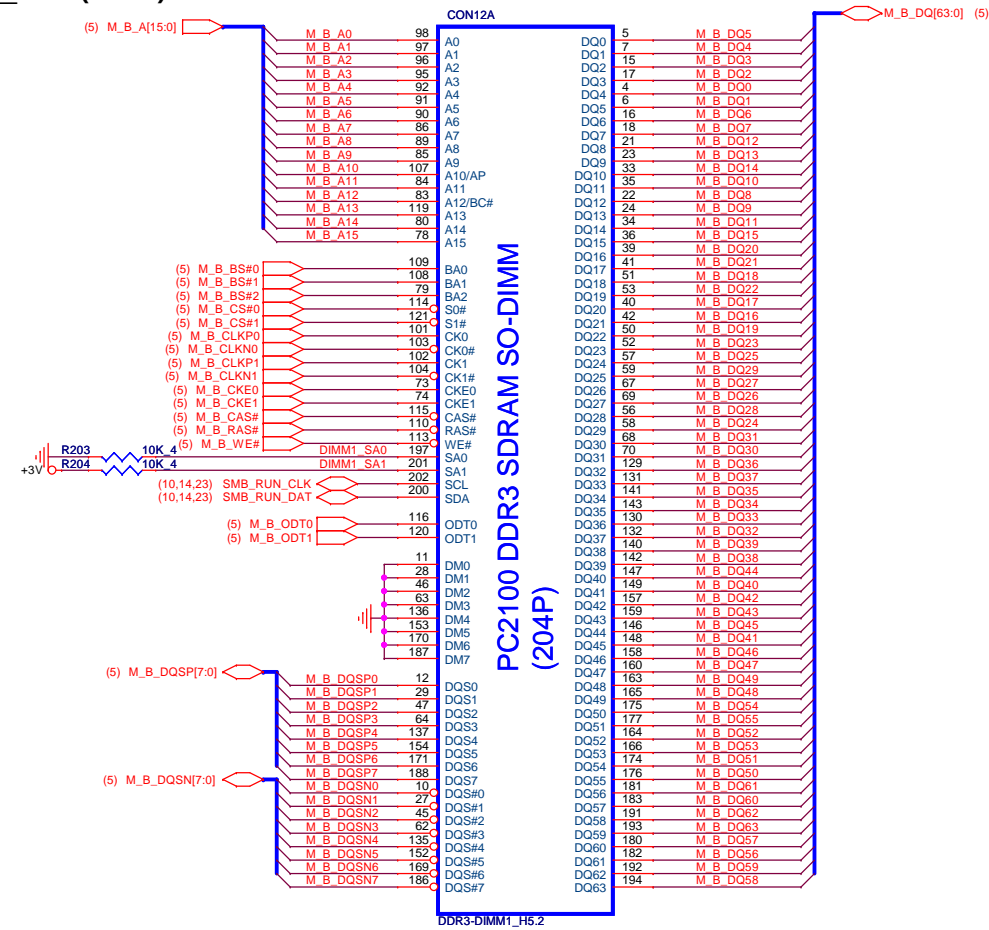

Place these Caps near So-Dimm1.

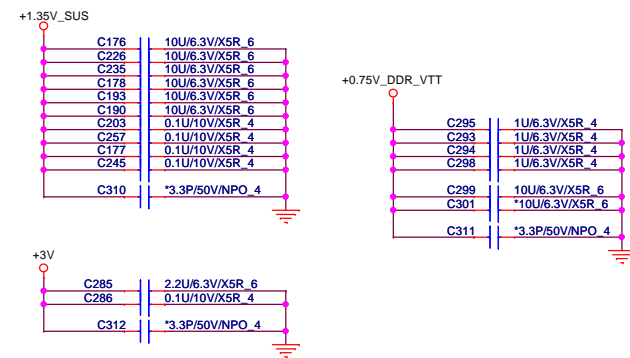

** Soldering Pin, Can not pull low.
Note: The input leakage current to the strap pins must be less than 10uA.
Since ECSCI is OD, no need for a back-drive protection diode on this signal. But note there is internal PU in chipset at default

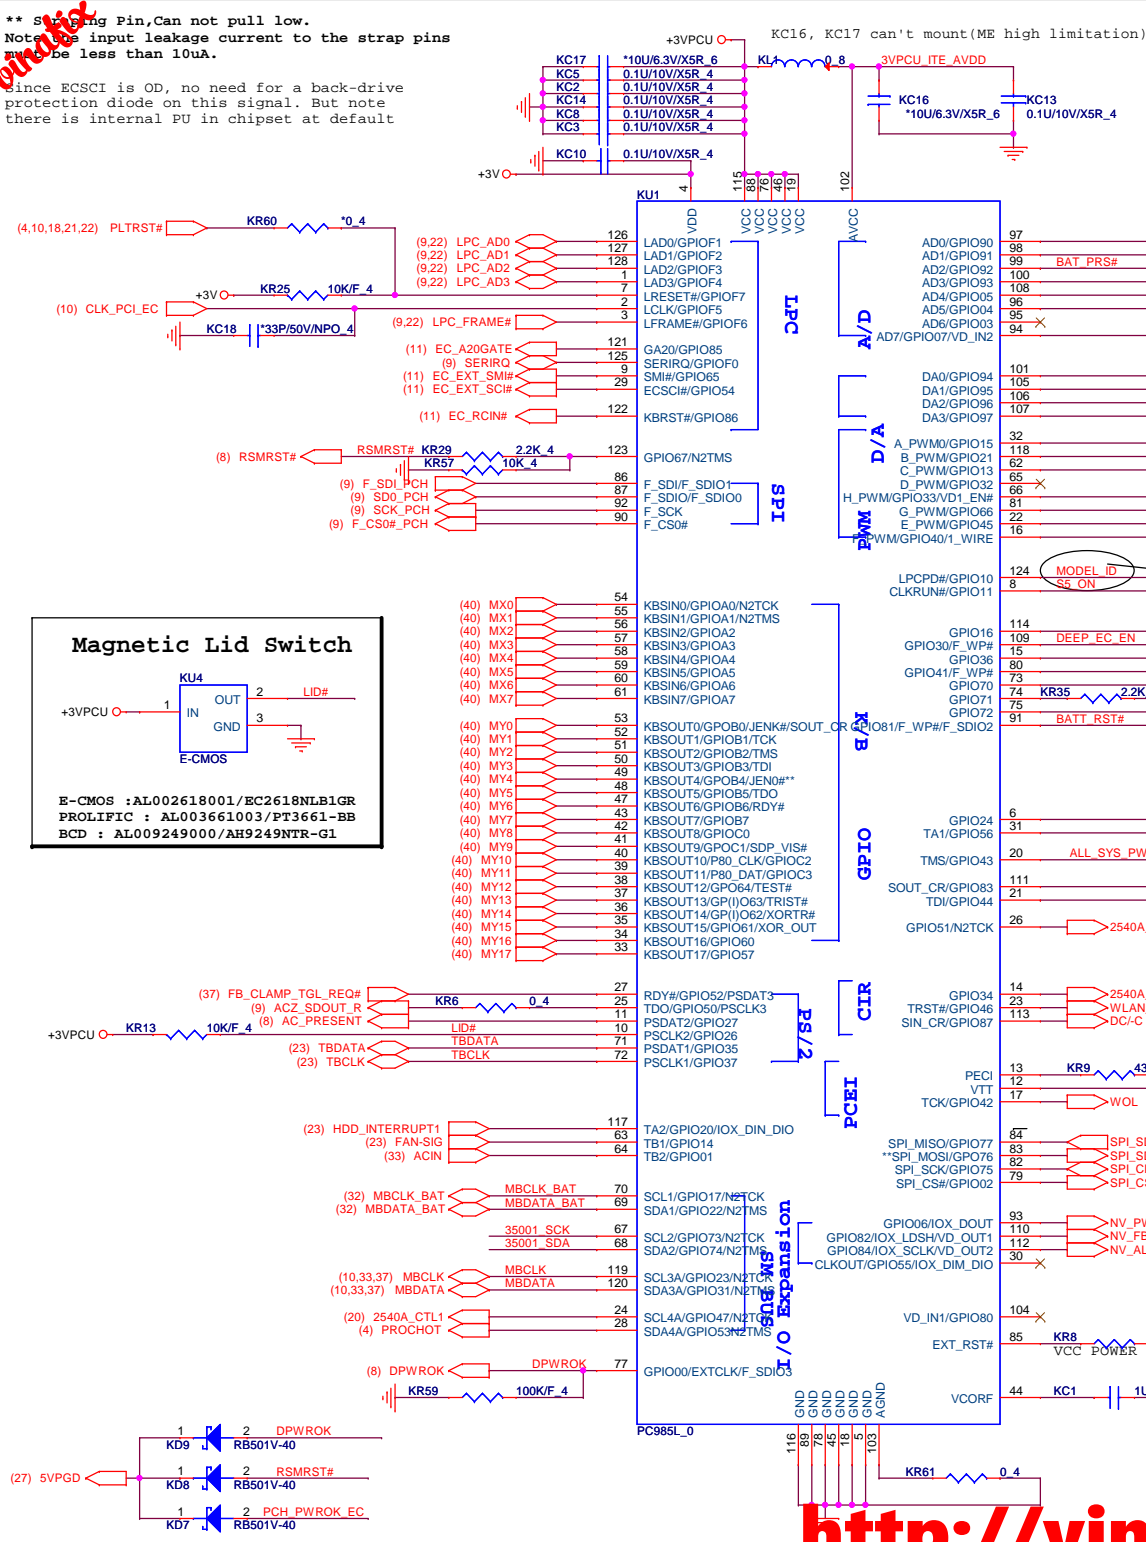

Magnetic Lid Switch






KU4

IN OUT 2 LID#

1 3 GND



E-CMOS

E-CMOS :AL002618001/EC2618N1B1GR
PROLIFIC : AL003661003/PT3661-BB
BCD : AL009249000/AH9249NTR-G1

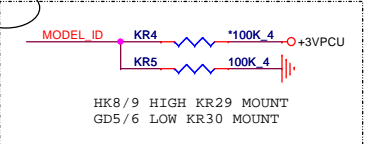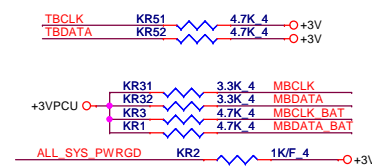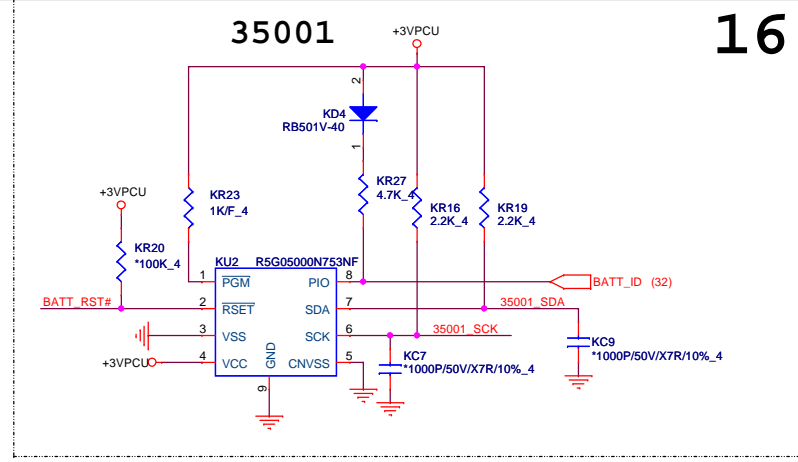



DRAM_VOLTAGE_SET
Low: 1.5V
High: 1.35V

Touch Screen

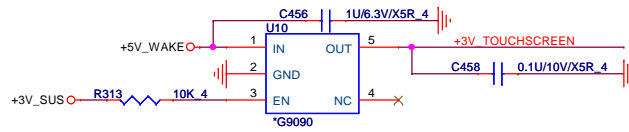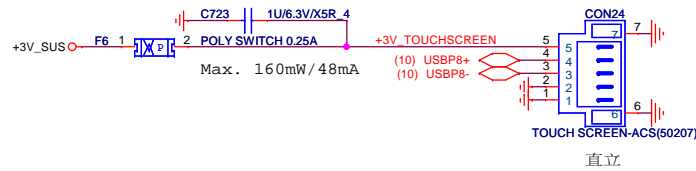


LVDS

FAST, UL/CSA

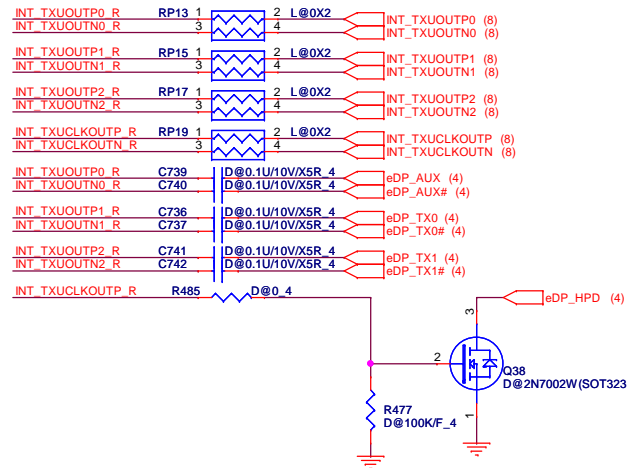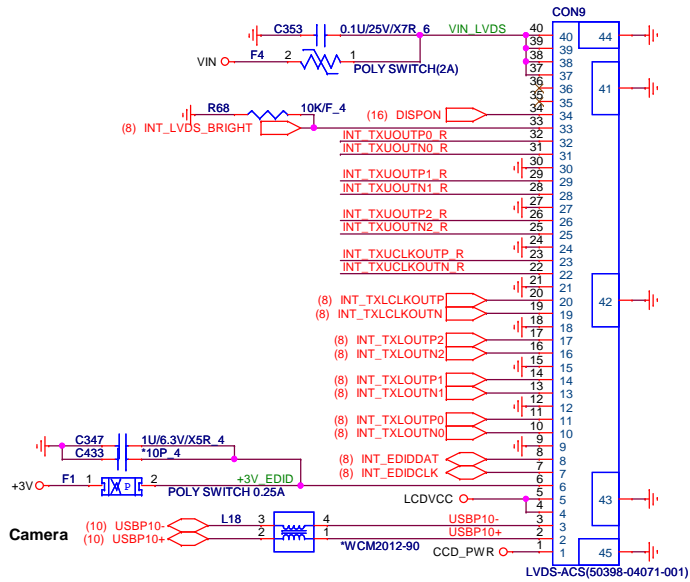


USB Camera Power

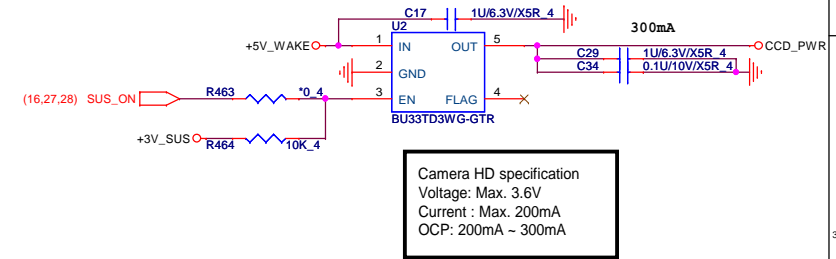





Camera HD specification
Voltage: Max. 3.6V
Current : Max. 200mA
OCP: 200mA ~ 300mA

NB LVDS enable



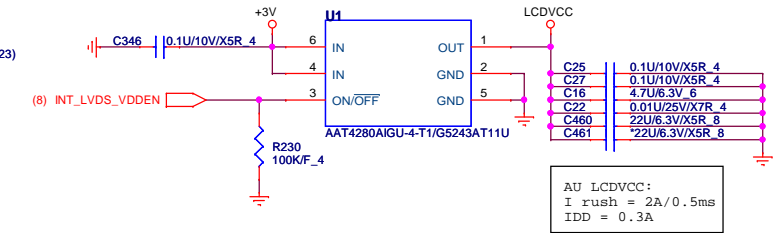


AU LCDVCC:
I rush = 2A/0.5ms
IDD = 0.3A






NFC

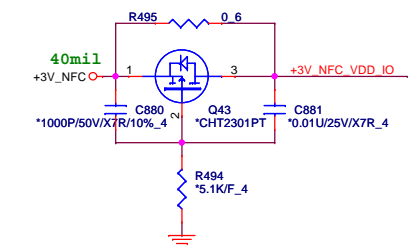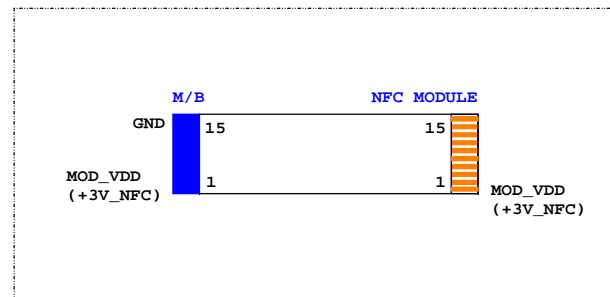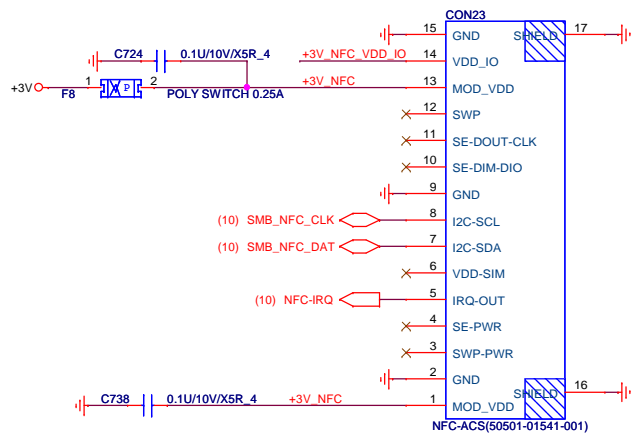

HDMI

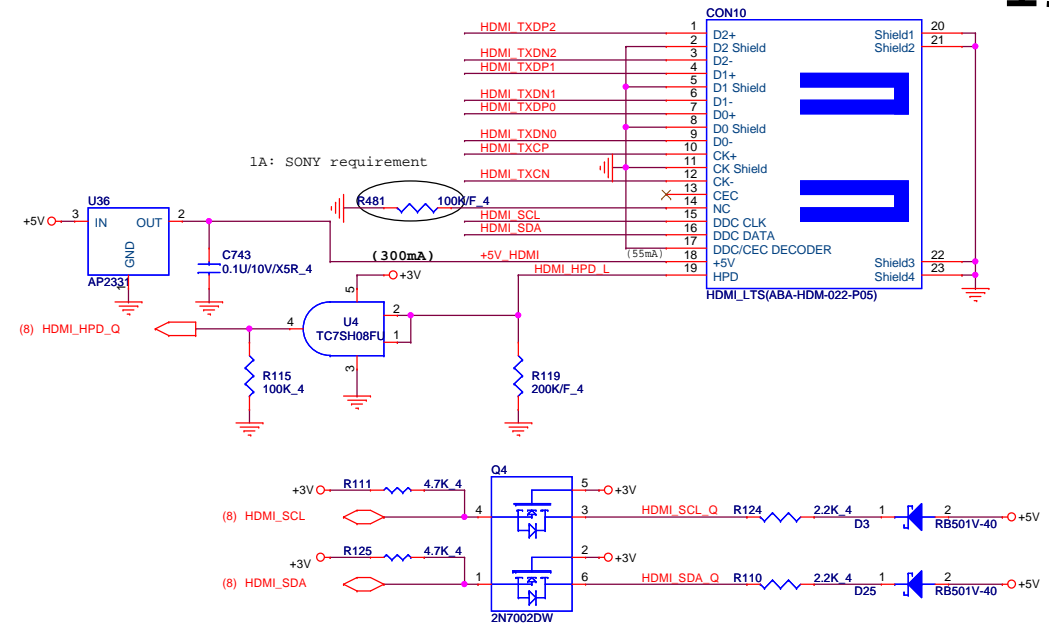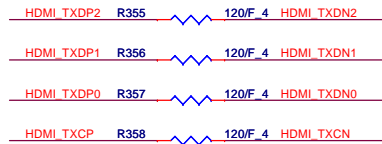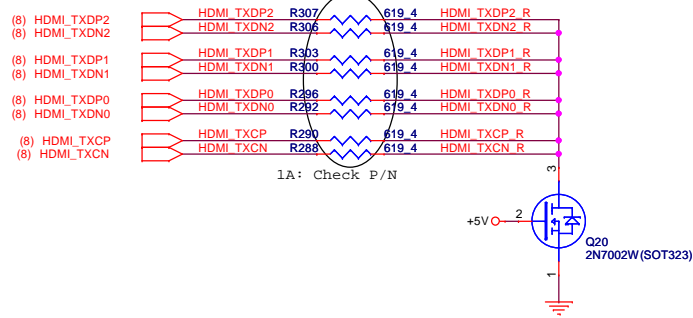

H/W Thermal Protect

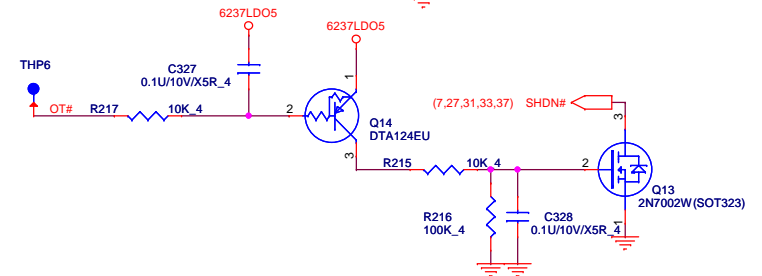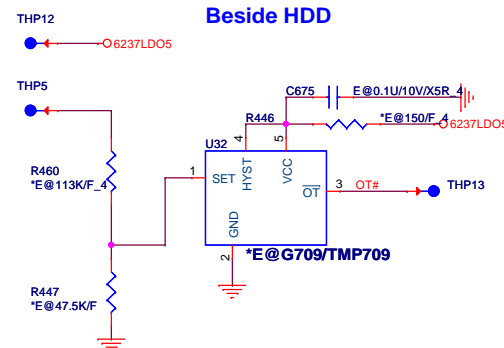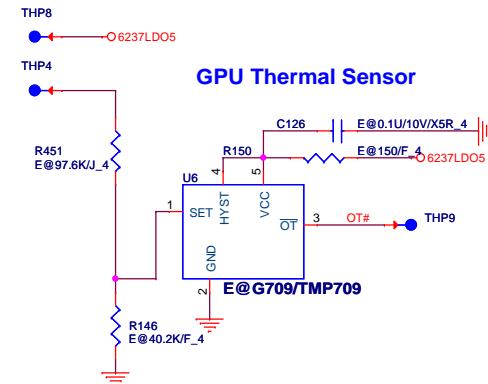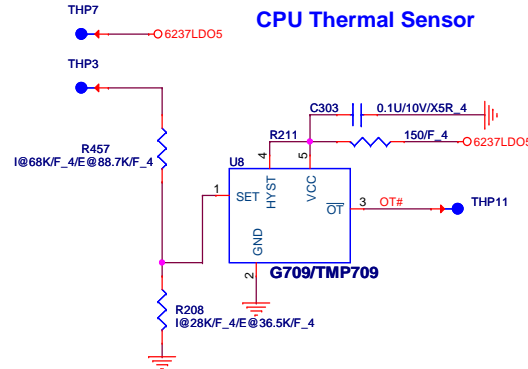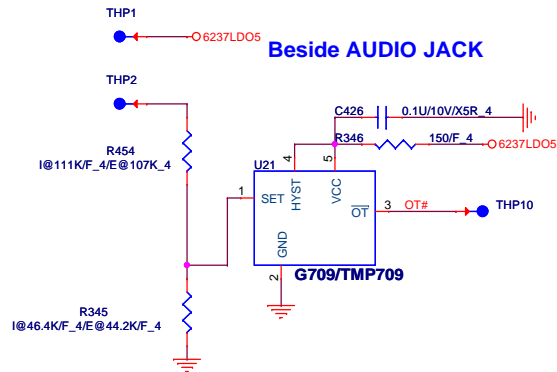

$$RSET(k\Omega) = 0.0012T^2 - 0.9308T + 96.147$$

95	18.5K
100	15K
107	10.3K
110	8.2K

DIS SKU




Location of IC	Temp	R-Set	Parts in BOM	Max	Min
Near CPU sensor temp	70	R208=36.87K	36.5K	71	70
Near GFX sensor temp	65	R146=40.72K	40.2K	66.3	65.1
Near AUDIO sensor temp	60	R345=44.62K	44.2K	61.2	60




UMA SKU

Location of IC	Temp	R-Set	Parts in BOM	Max	Min
Near CPU sensor temp	81	R208=28.63K	28K	82.3	81.4
Near AUDIO sensor temp	58	R345=46.2K	46.4K	58.4	57.1






Quanta Computer Inc.
PROJECT : GD5

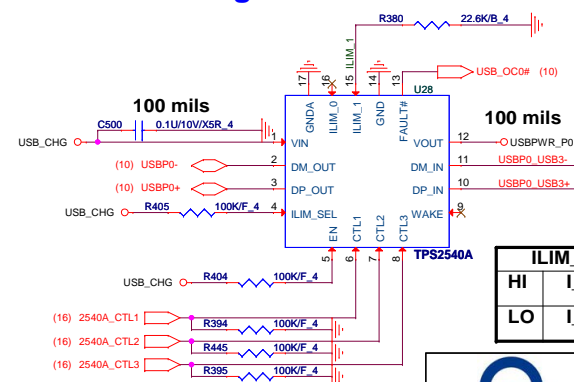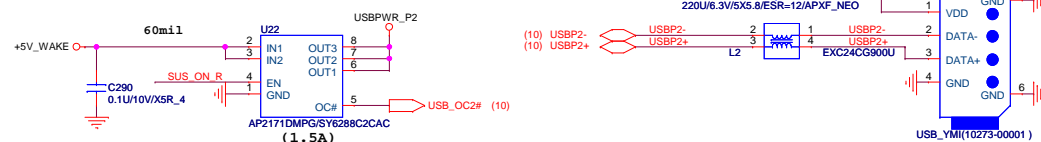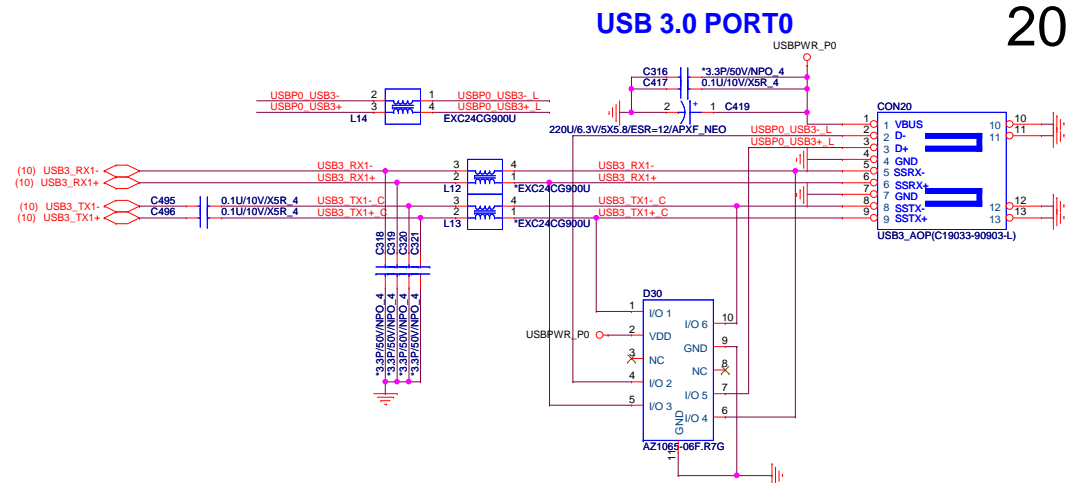


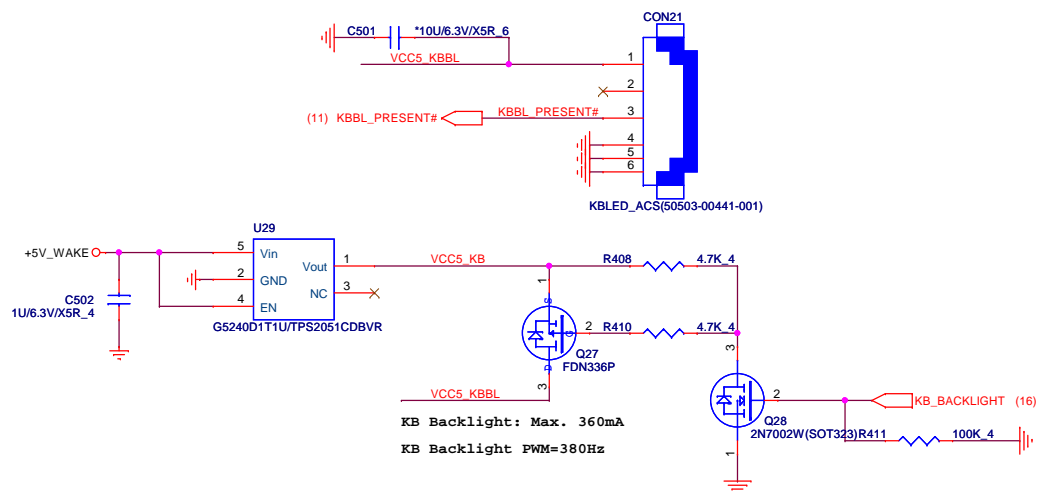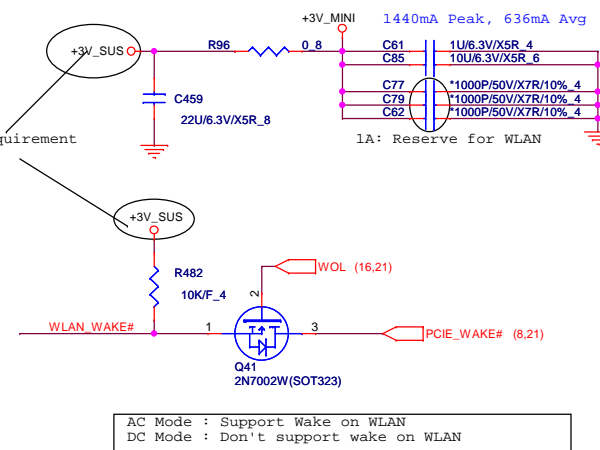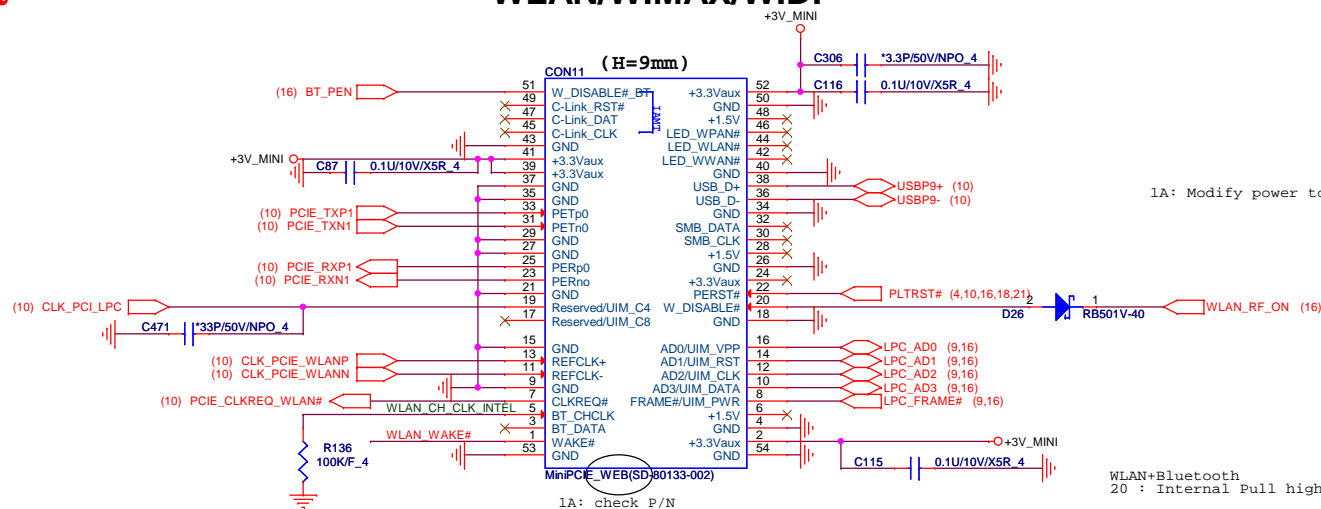




ODD CONNECTOR

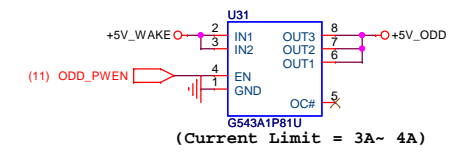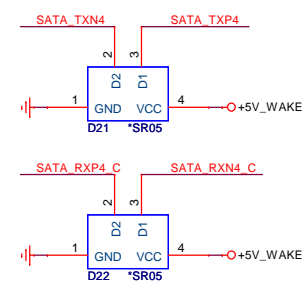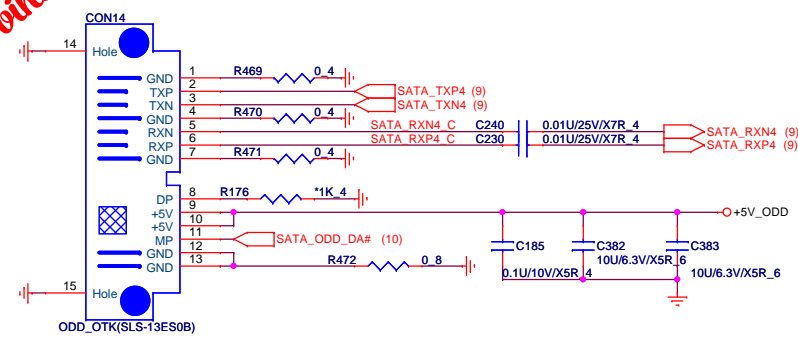


HDD BOARD CONNECTOR

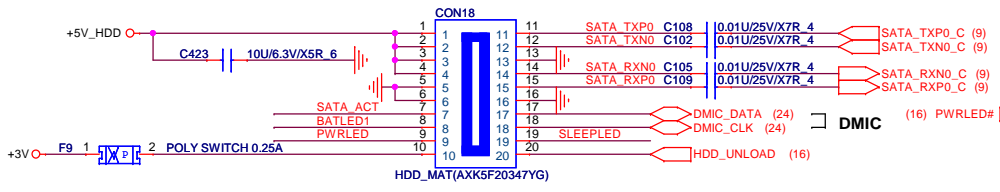


Power/Sleep LED

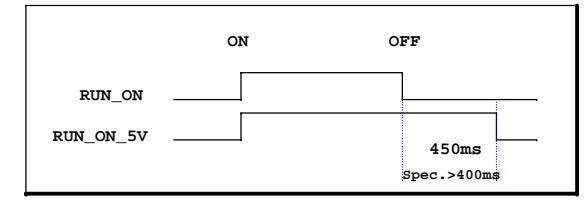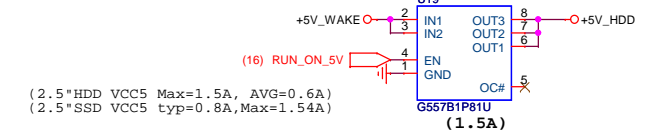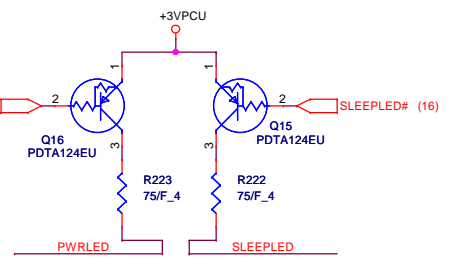



SATA LED




BATTERY LED

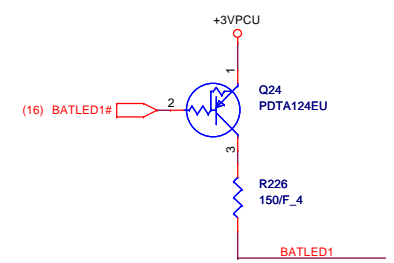


HDD PROTECT

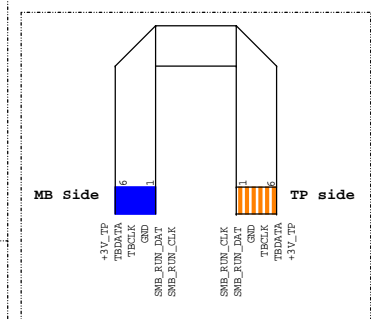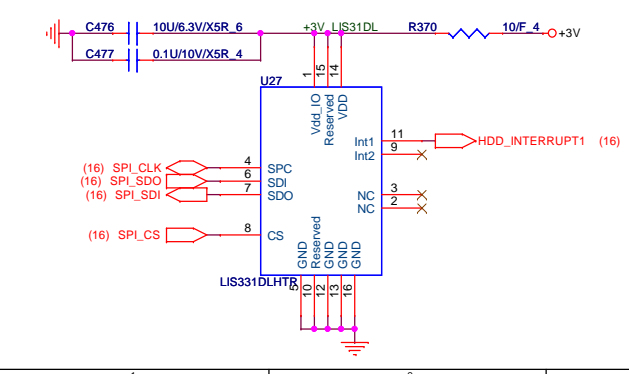

T/P Board to T/P

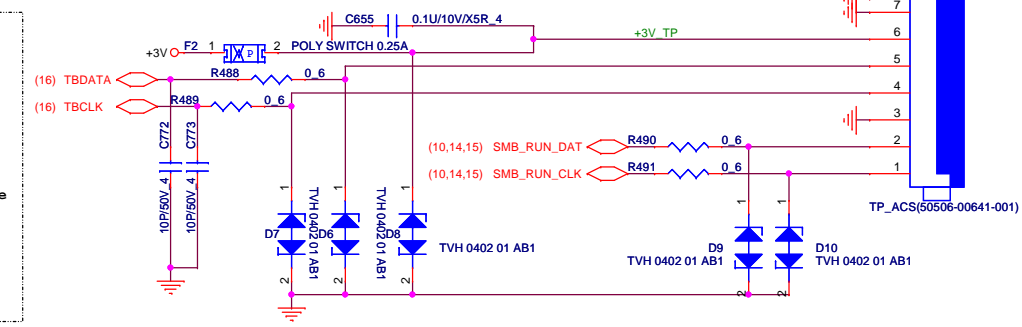

FAN


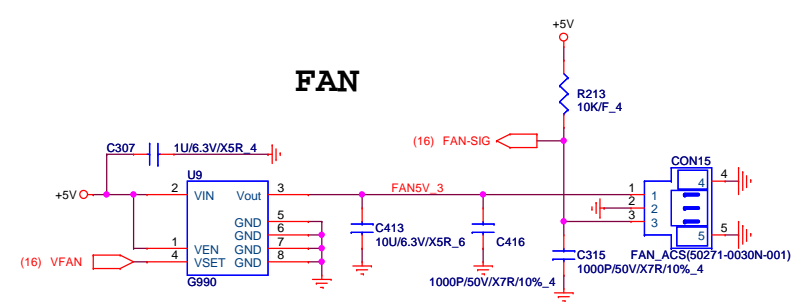


Analog

Digital




SPK L+ L- R+ R- trace width
Speaker 4 ohm ==> 50 mils

SPEAKER CON.



<<Attention>>
Place these EMI components close to codec; For EMI issue.

For EMI

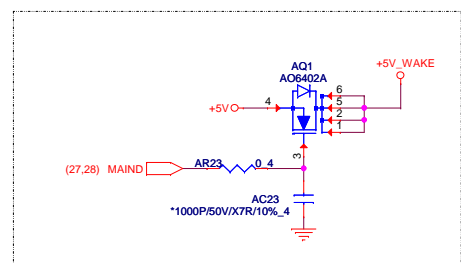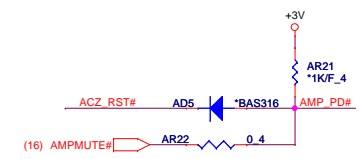


ALC233-CG






Analog

Digital

Combo Jack

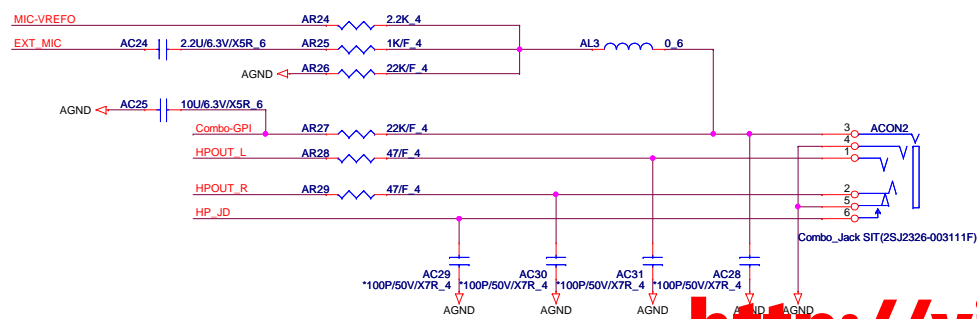

Power SW Board Connector

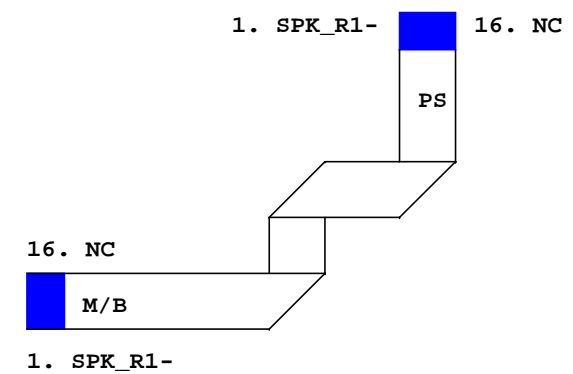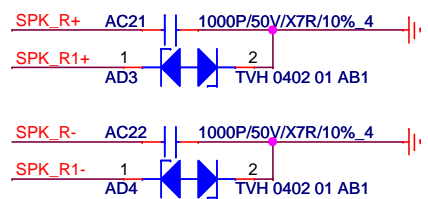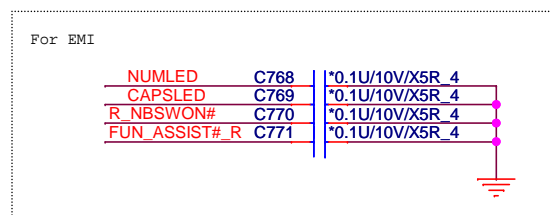
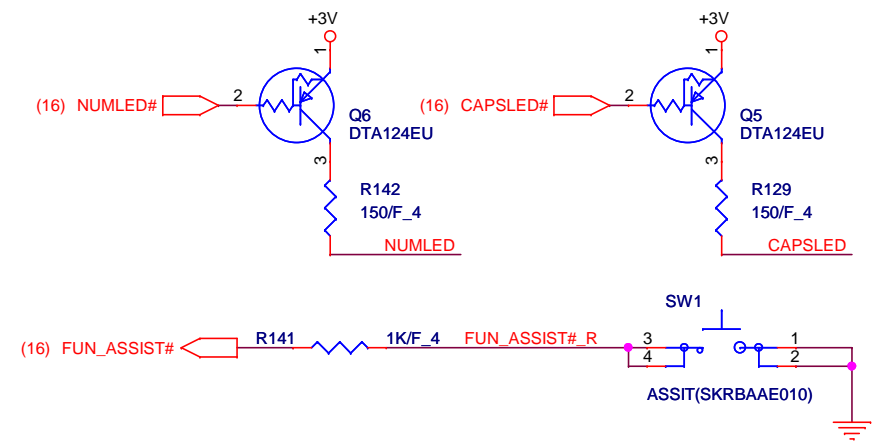
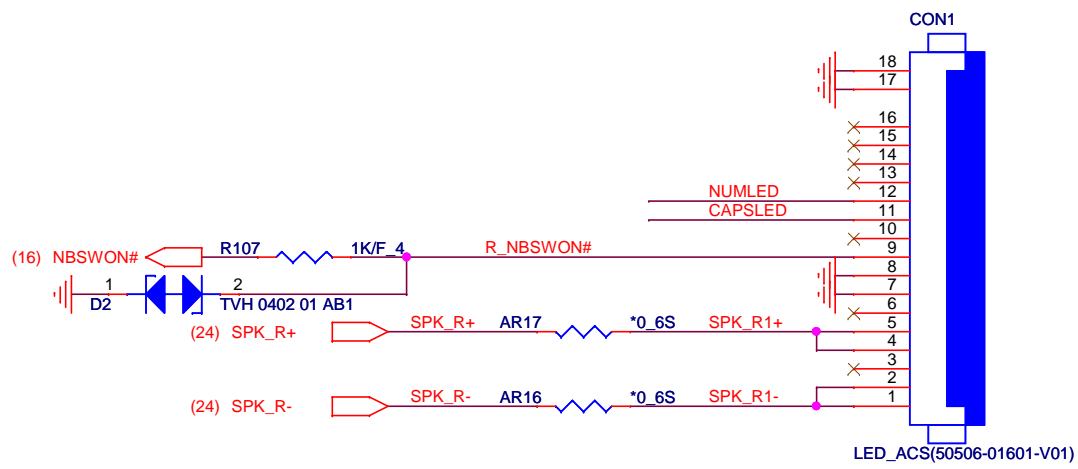


1.Level 1 Environment-related Substances Should Never be Used.
2.Recycled Resin and Coated Wire should be procured from Green Partners.


Quanta Computer Inc.
PROJECT :GD5

Size	Document Number	Rev
	LED/PS	1A
Date:	Thursday, October 25, 2012	Sheet 25 of 41


GFX_CORE LL: -3.9mV/A for GT2

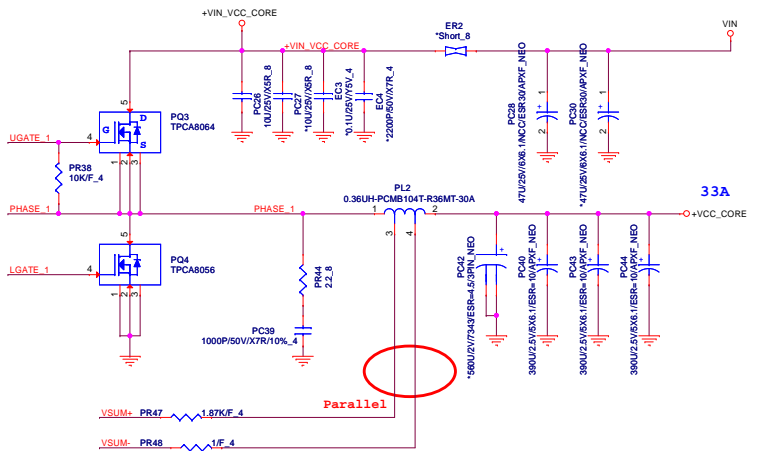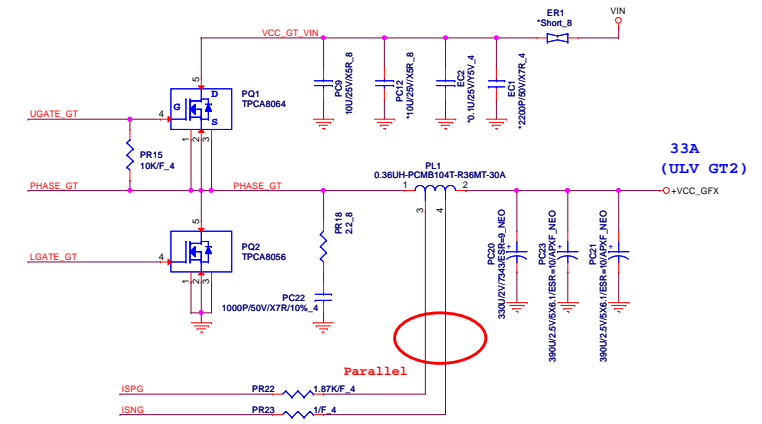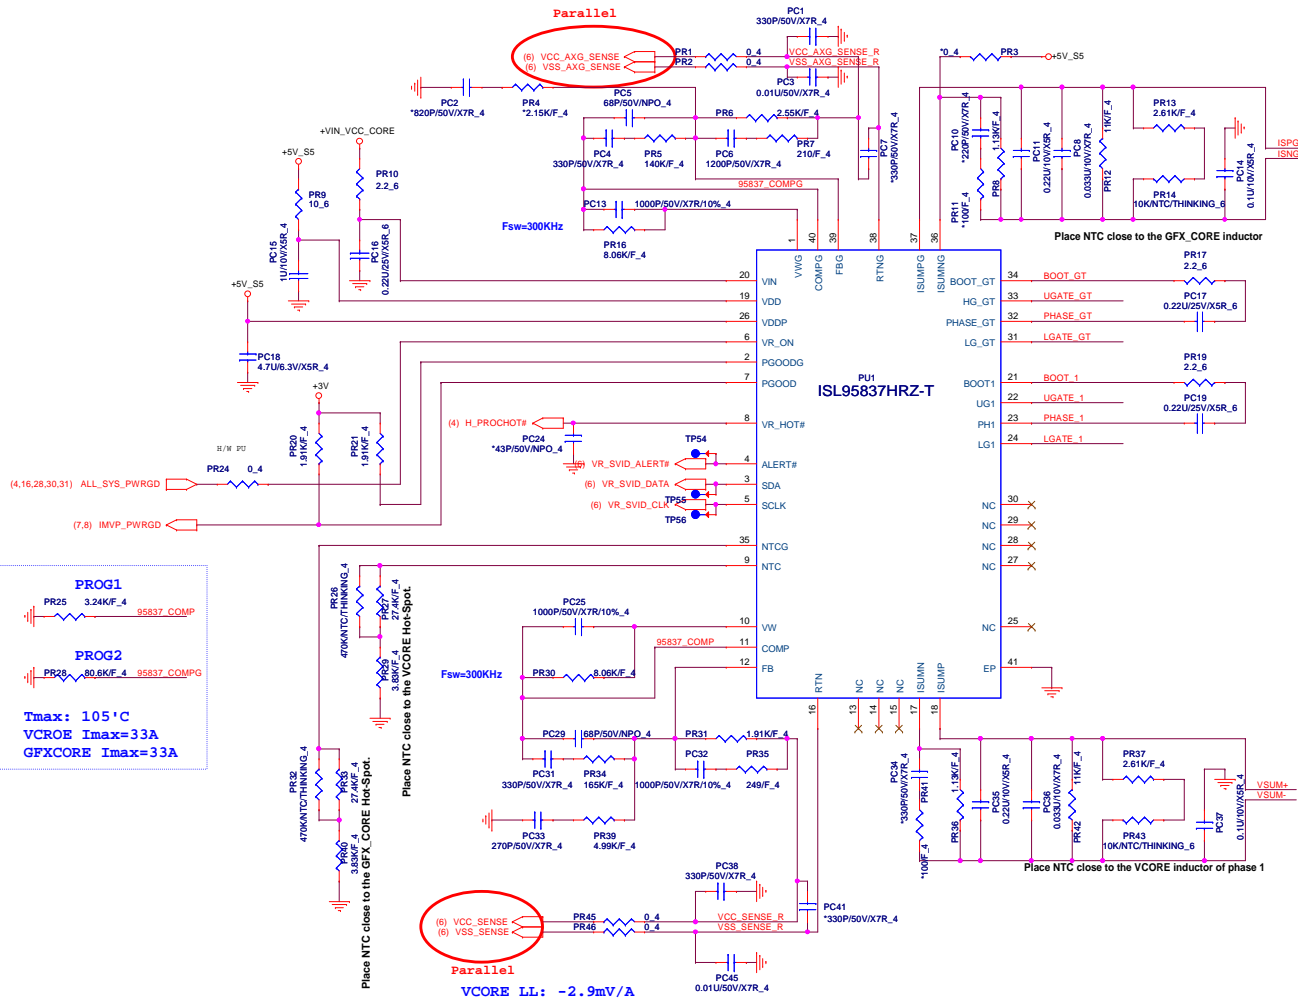






3.3V & 5V

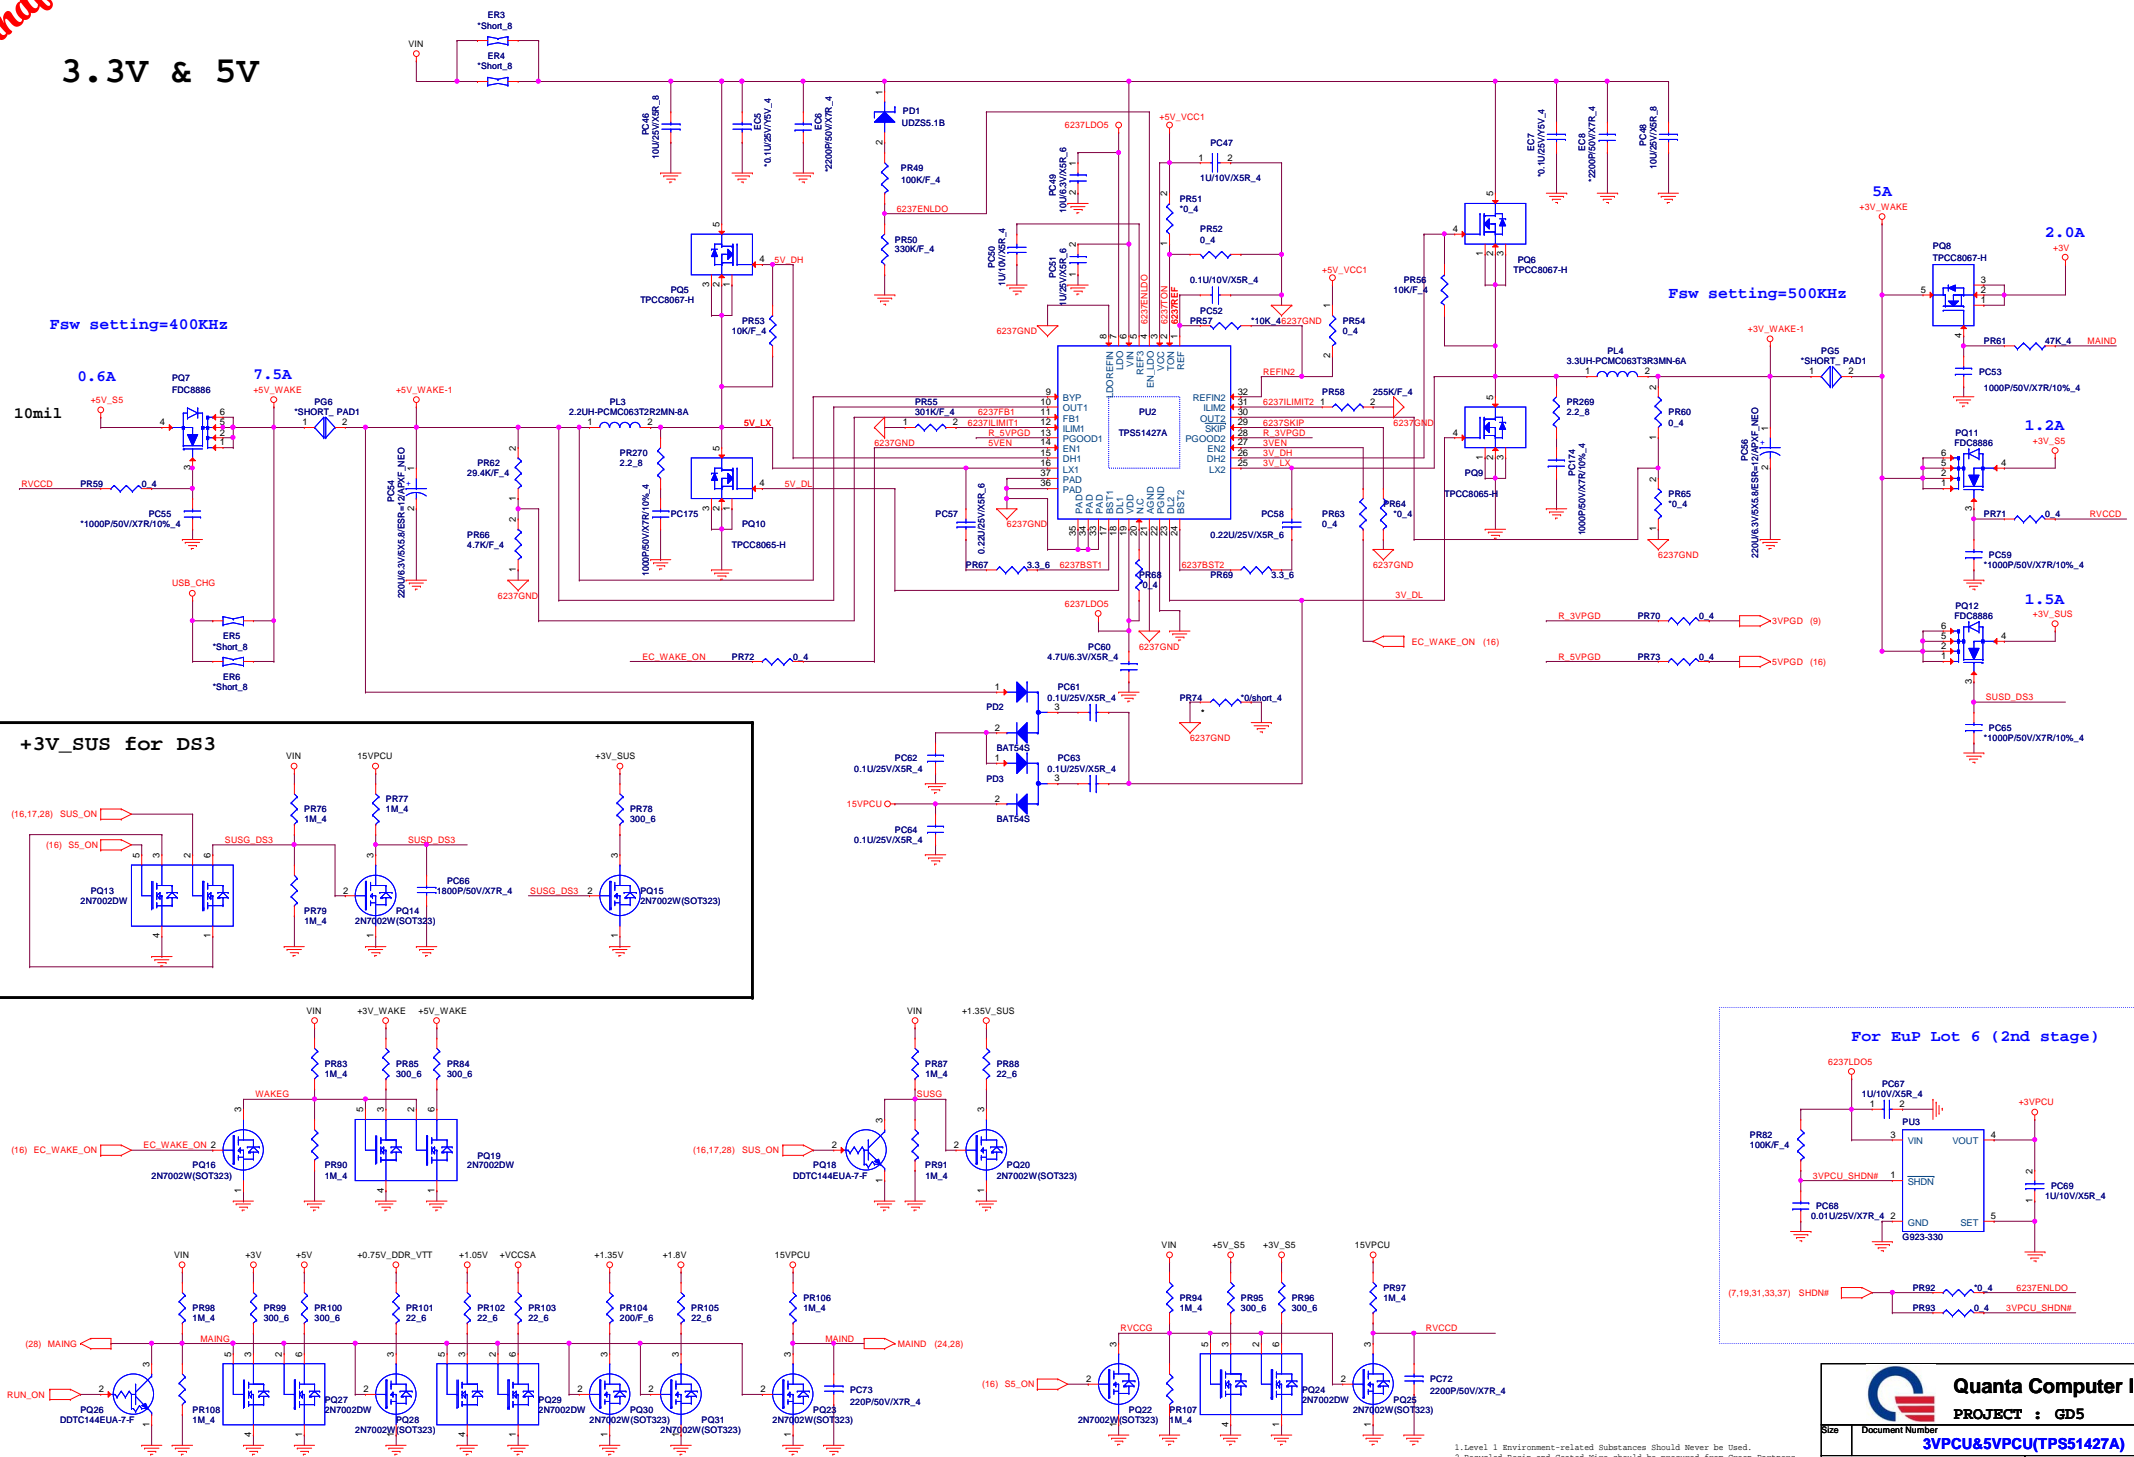








+1.05V / 15.0A

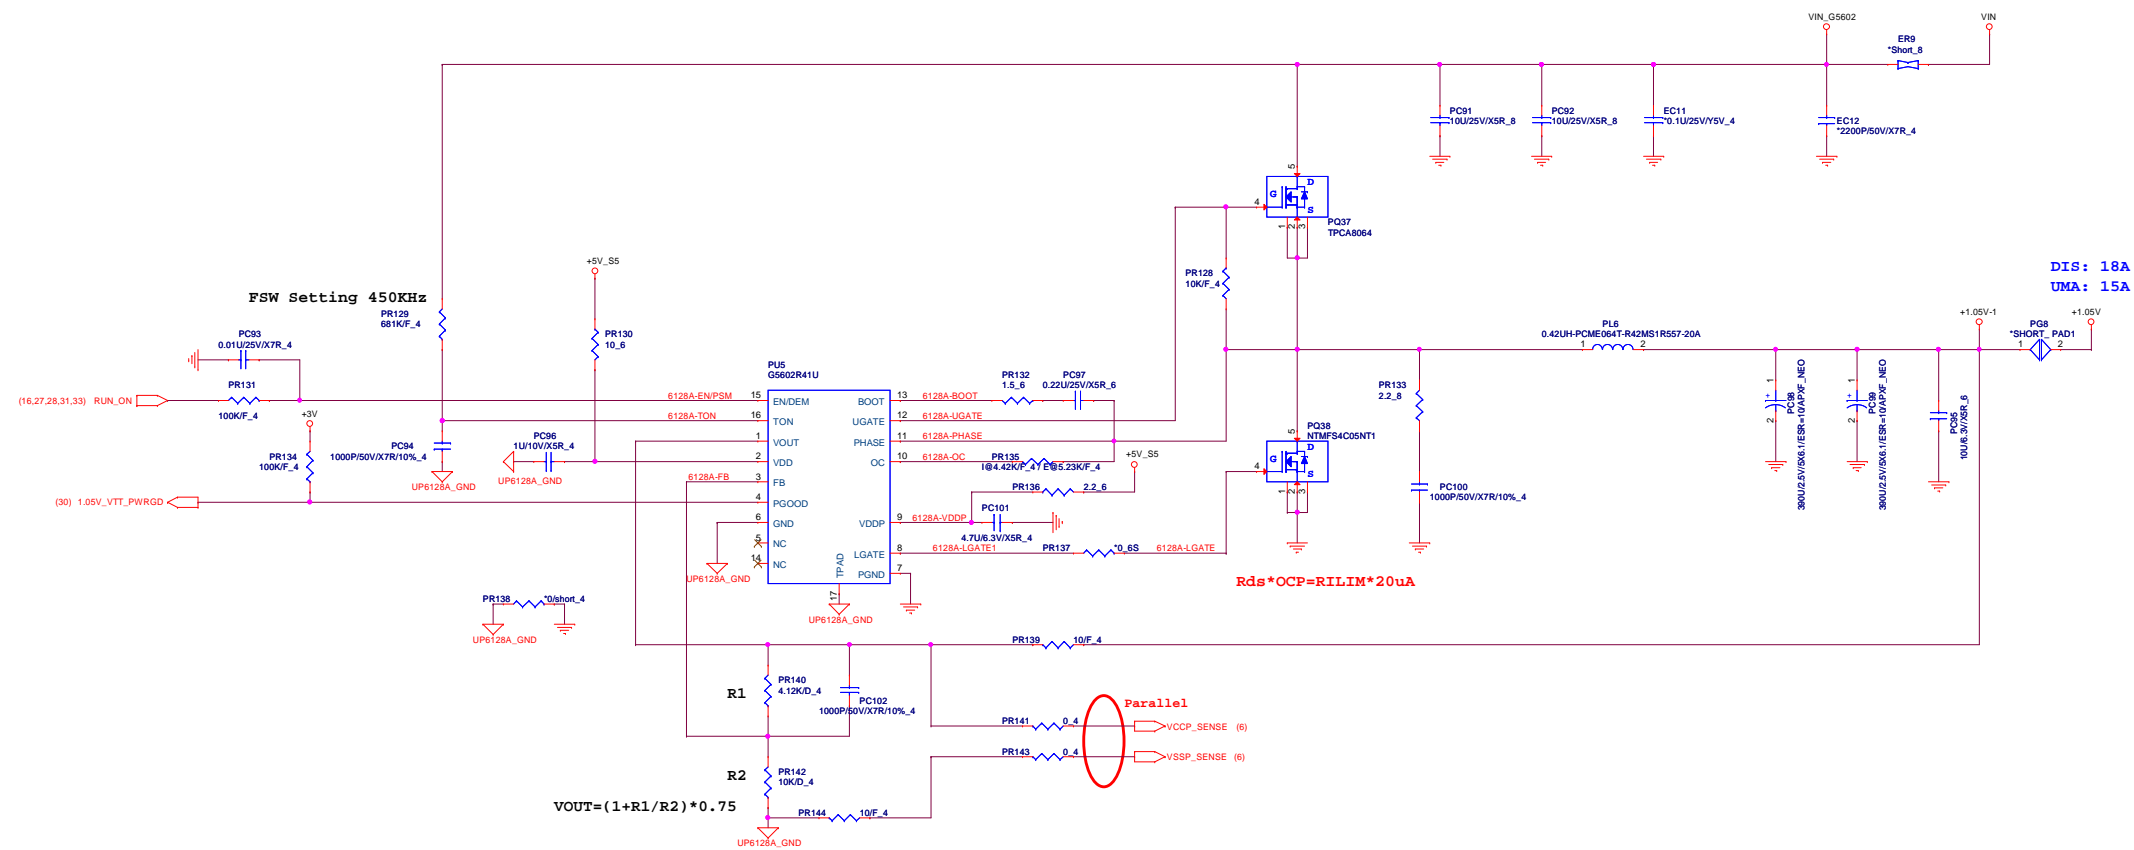

vinafix

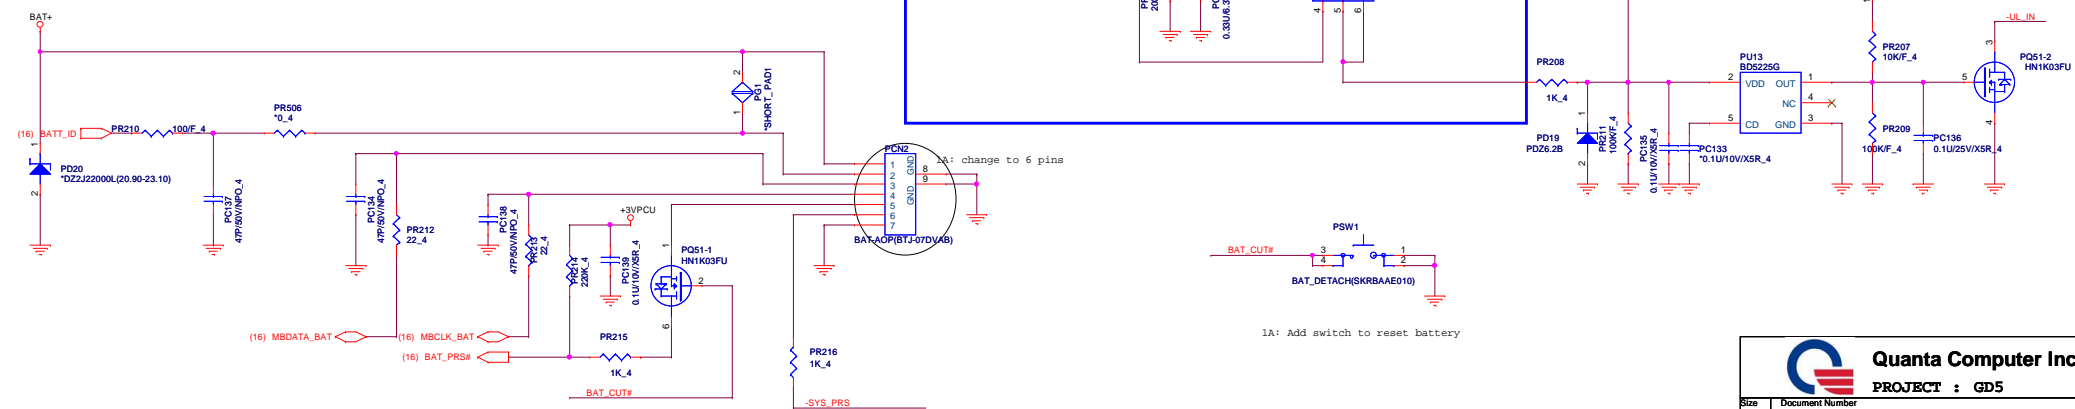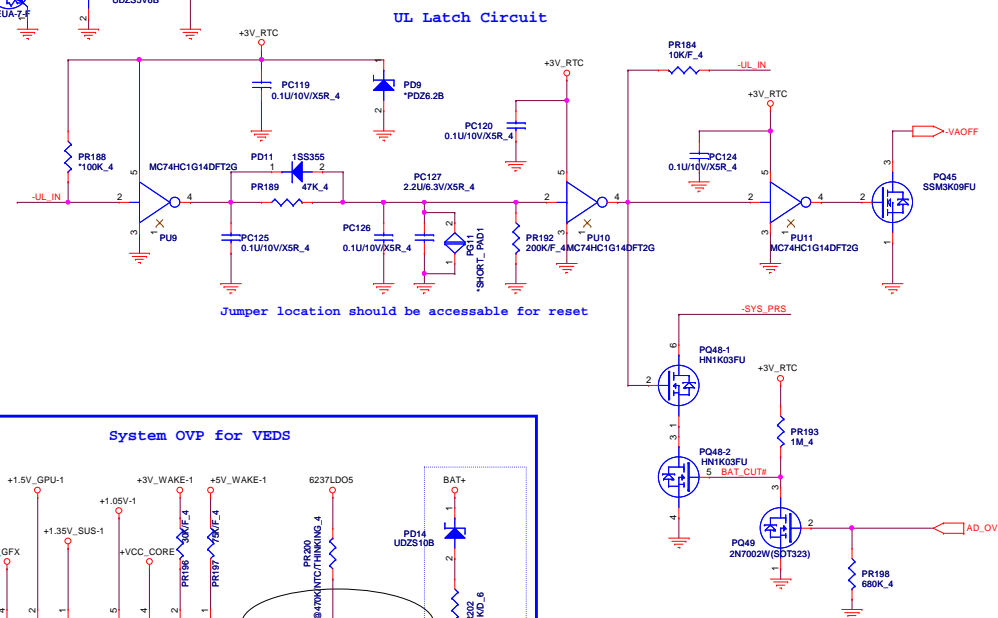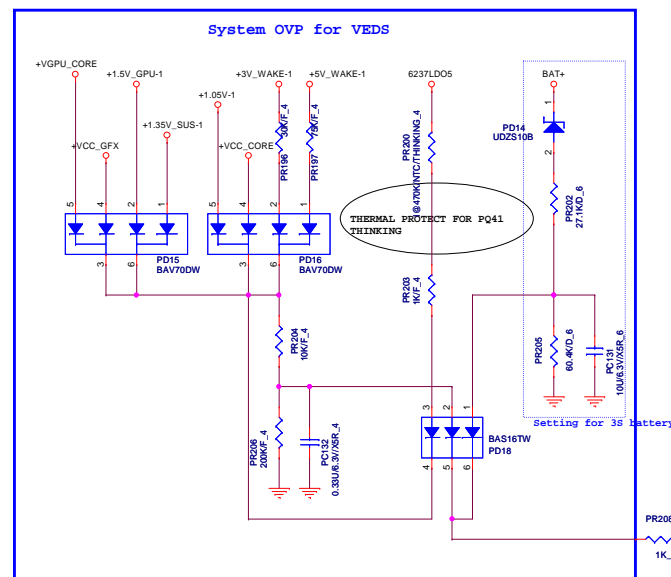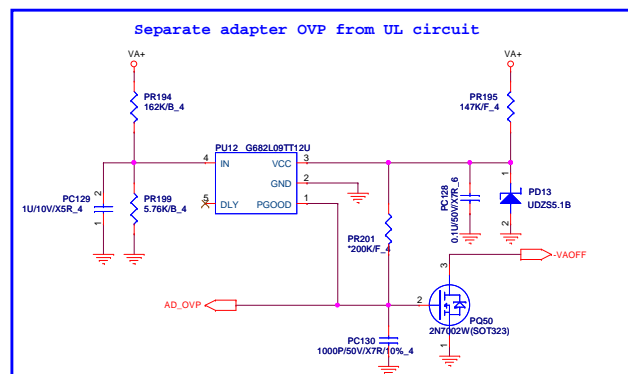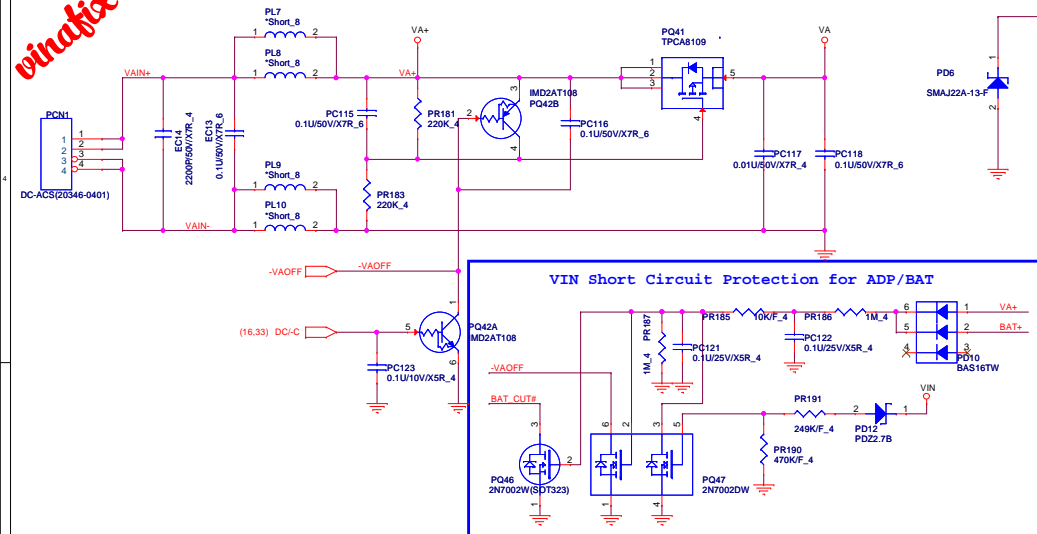



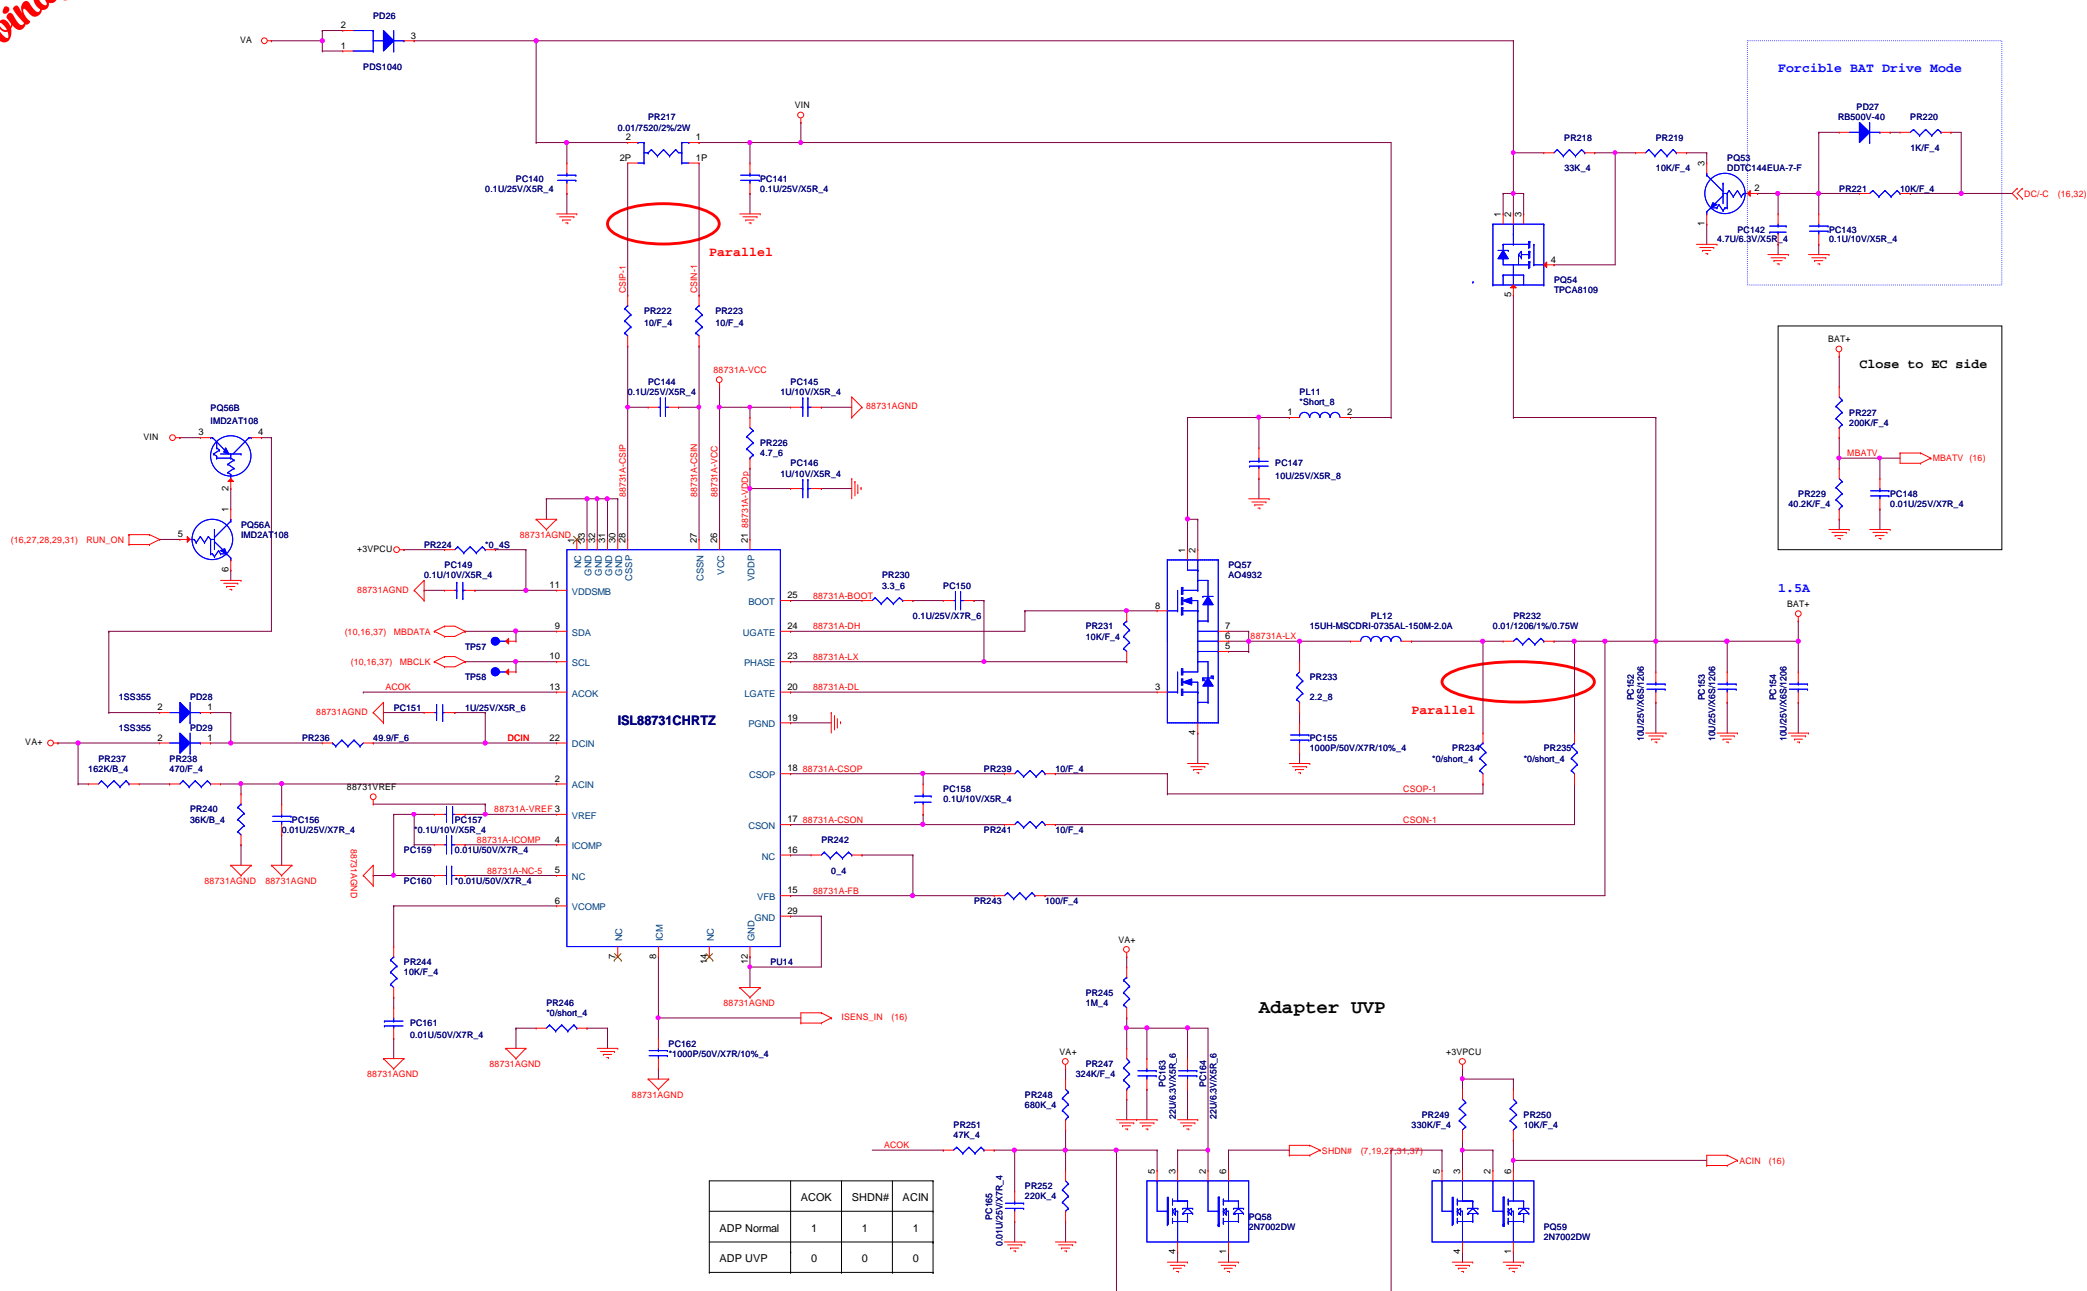


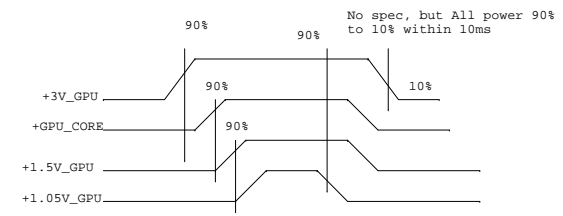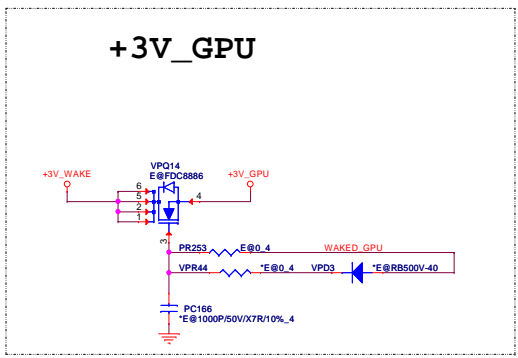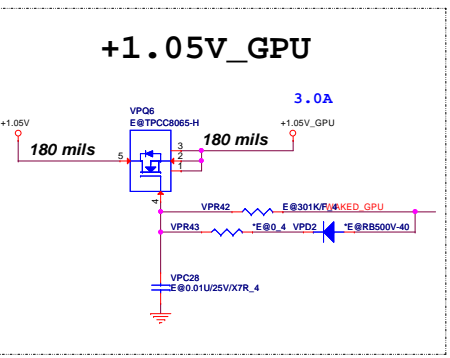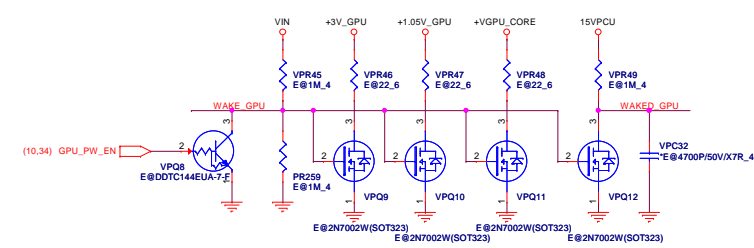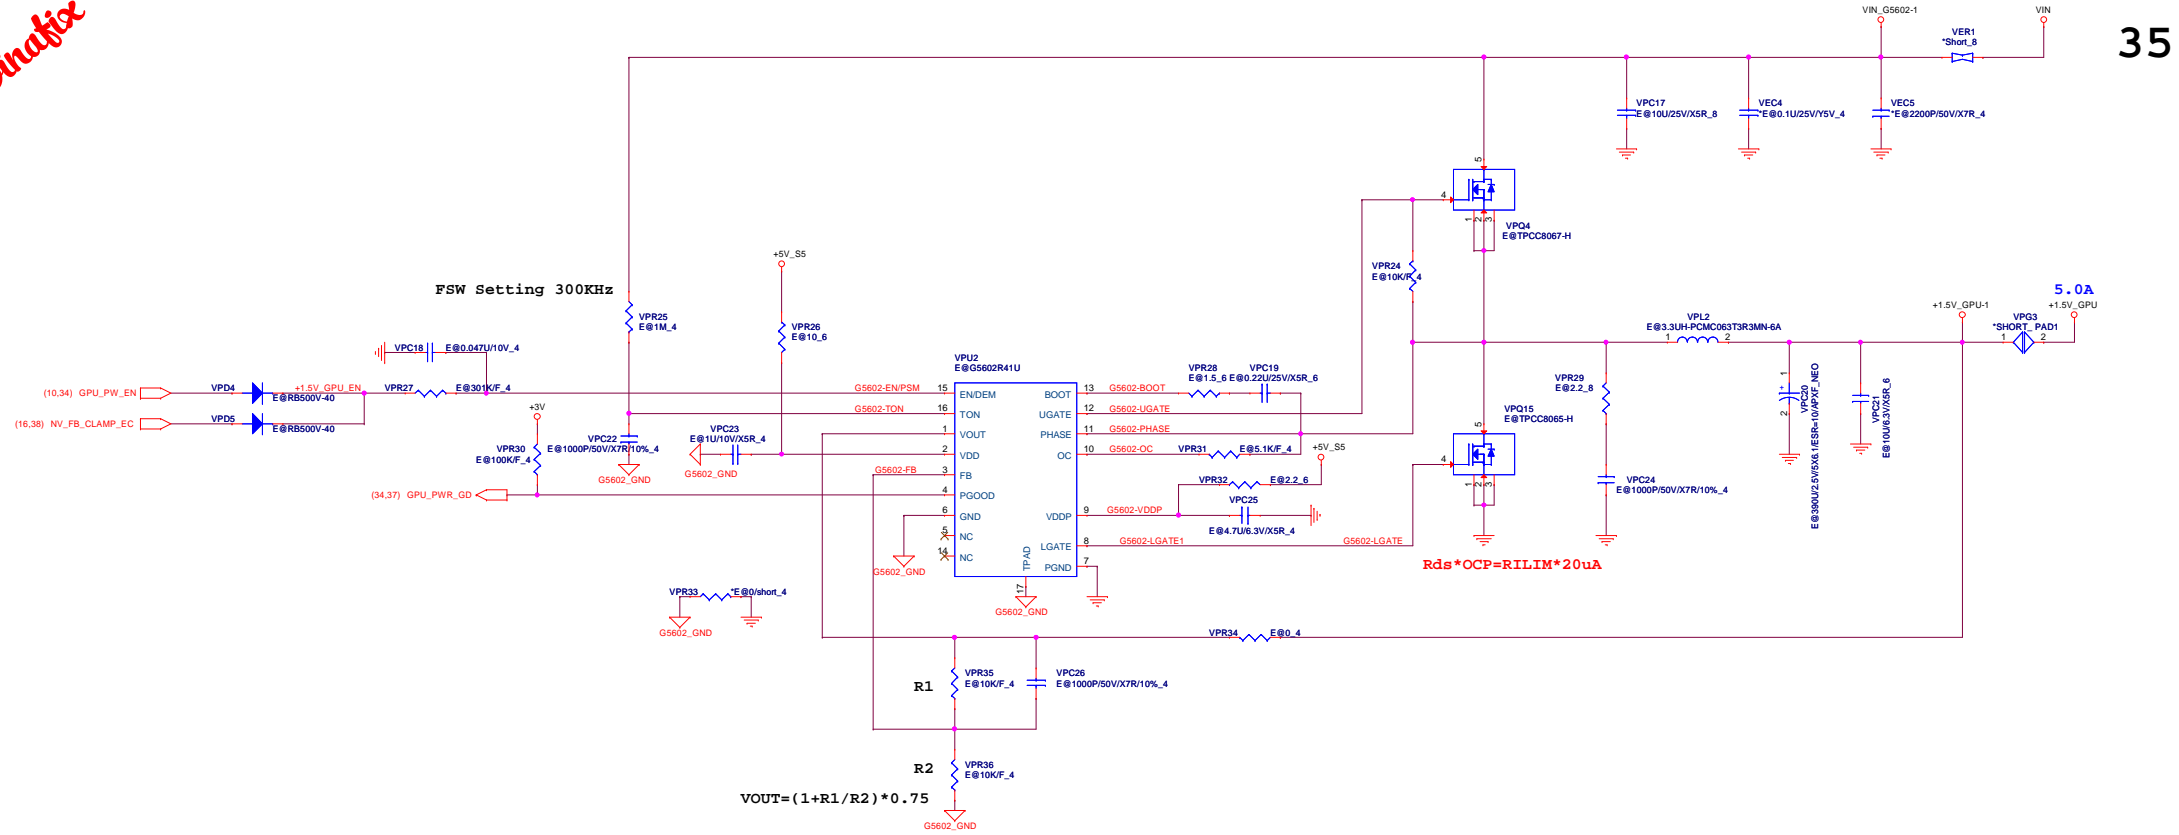

Up Side VRAM TOP/BOT

TOP

BOT

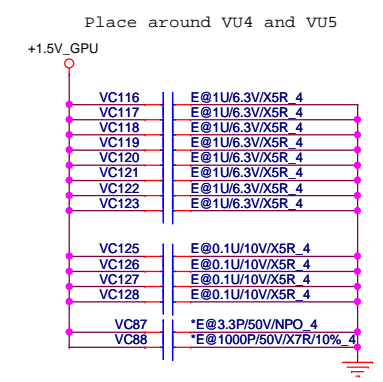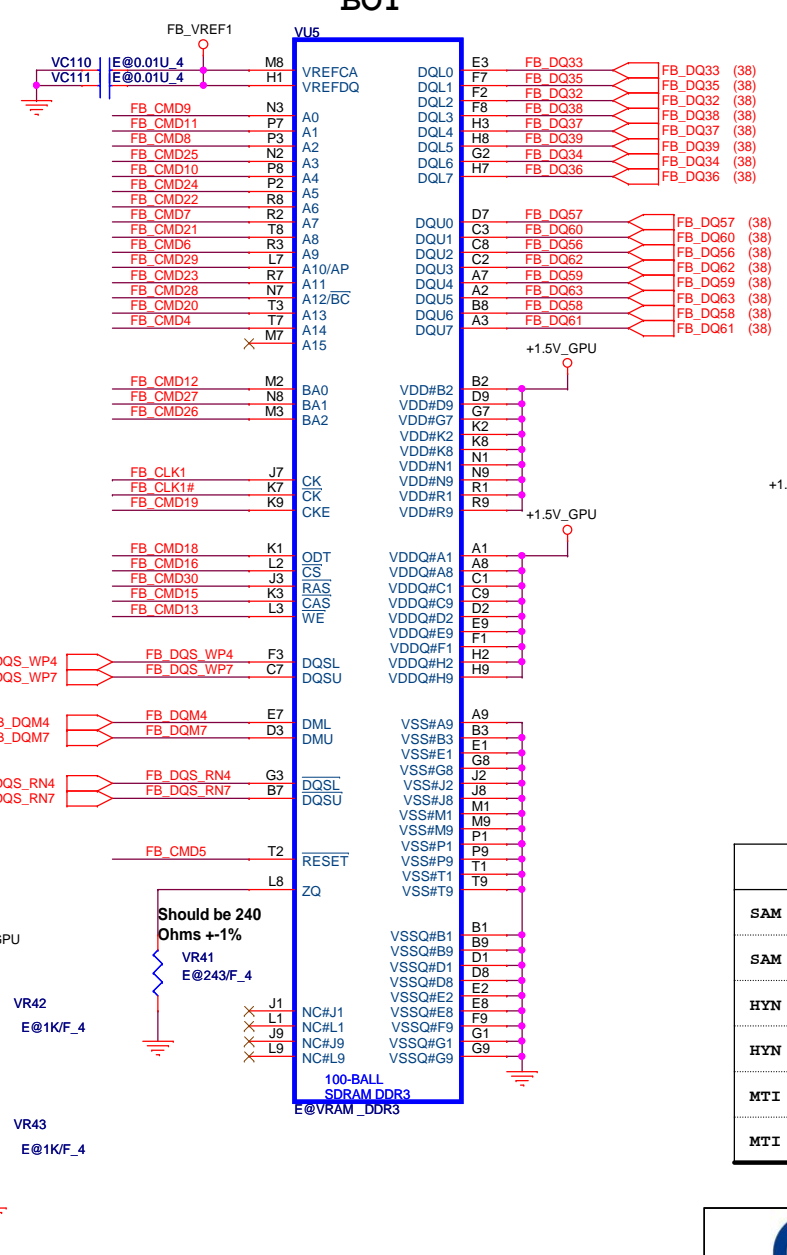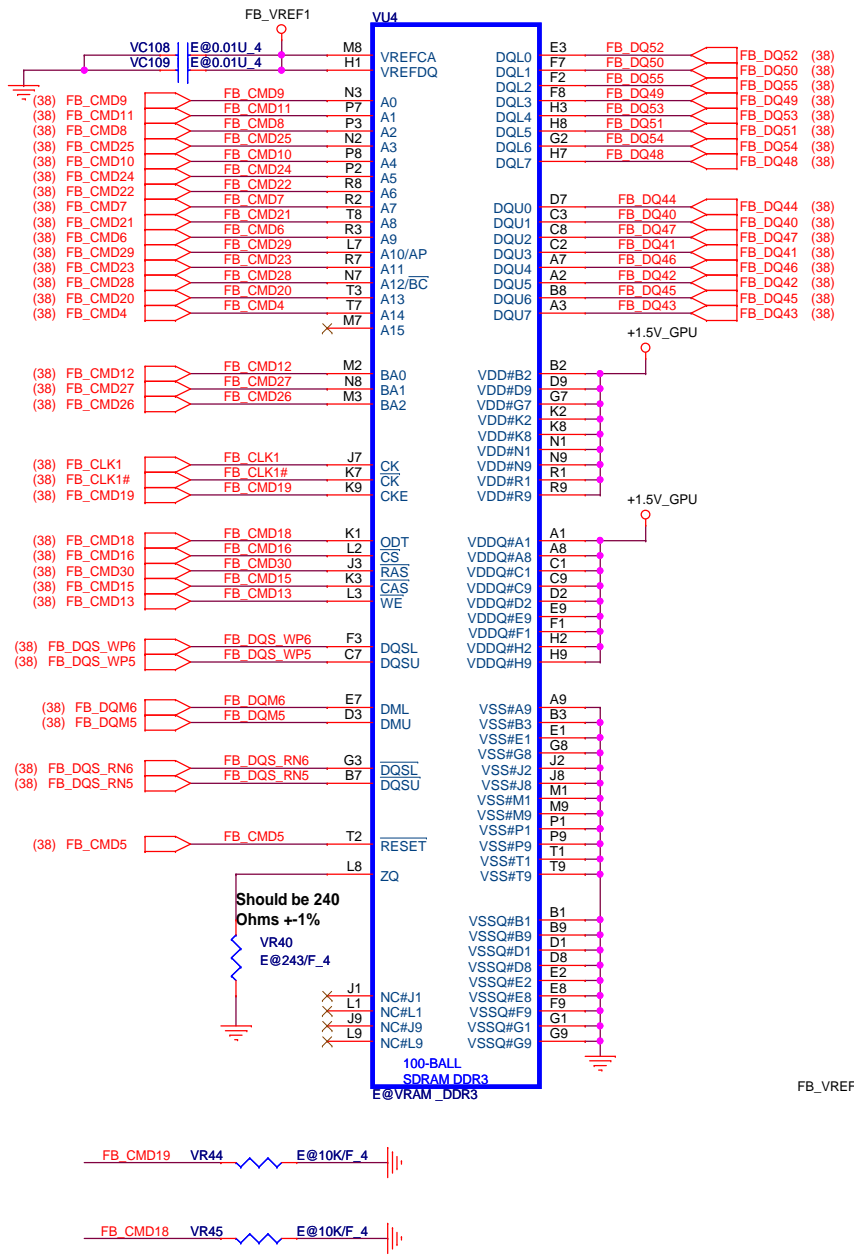



	P/N	Vendor P/N
SAM 2G	AKD5MGGT525	K4W2G1646E-BC11
SAM 4G	AKD5MGSTL14	K4W4G1646B-HC11
HYN 2G		
HYN 4G		
MTI 2G	AKD5MGWT525	MT41J128M16JT-107G:K
MTI 4G	AKD5PGSTL07	MT41K256M16HA-107G:E

Quanta Computer Inc.
PROJECT : Huron River


Size	Document Number	Rev
	VRAM 4/4	1A
Date:	Thursday, October 25, 2012	Sheet 39 of 41

1.Level 1 Environment-related Substances Should Never be Used.
2.Recycled Resin and Coated Wire should be procured from Green Partners.



GRAPHIC NUT





PCH NUT





WALN NUT







HDD/B NUT

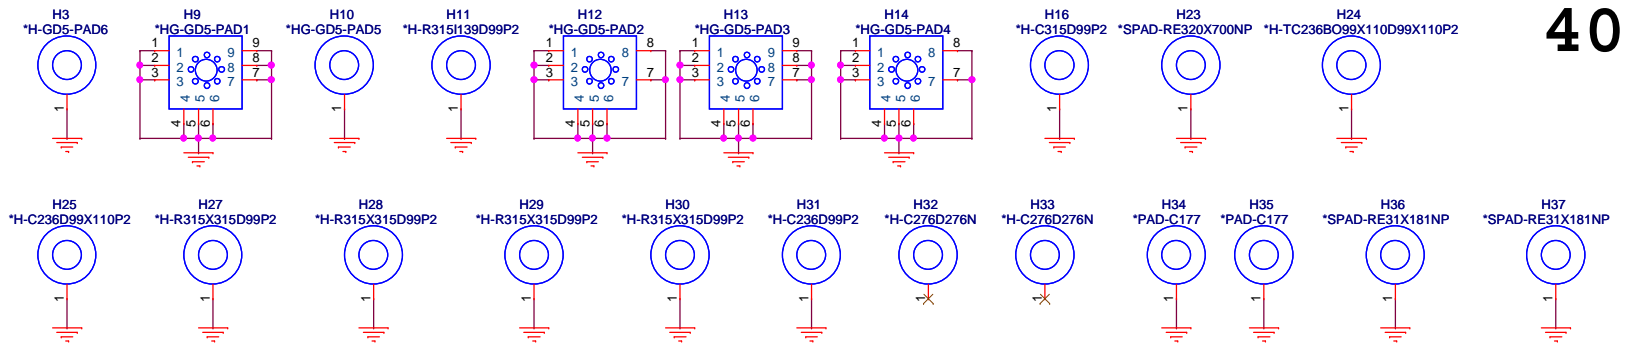

KEY BOARD Connector

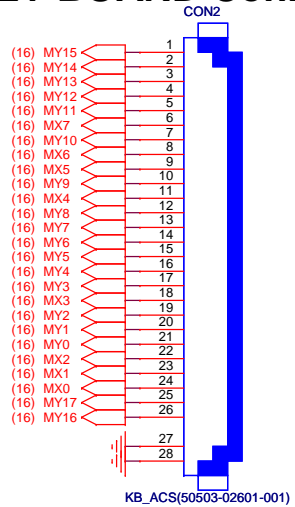

MY15	C744	*220P 4
MY14	C745	*220P 4
MY13	C746	*220P 4
MY12	C747	*220P 4
MY11	C748	*220P 4
MX7	C749	*220P 4
MY10	C750	*220P 4
MX6	C751	*220P 4
MX5	C752	*220P 4
MY9	C753	*220P 4
MX4	C754	*220P 4
MY8	C755	*220P 4
MY7	C756	*220P 4
MY6	C757	*220P 4
MY5	C758	*220P 4
MY4	C759	*220P 4
MY3	C760	*220P 4
MX3	C761	*220P 4
MY2	C762	*220P 4
MY1	C763	*220P 4
MY0	C764	*220P 4
MX2	C765	*220P 4
MX1	C766	*220P 4
MX0	C767	*220P 4

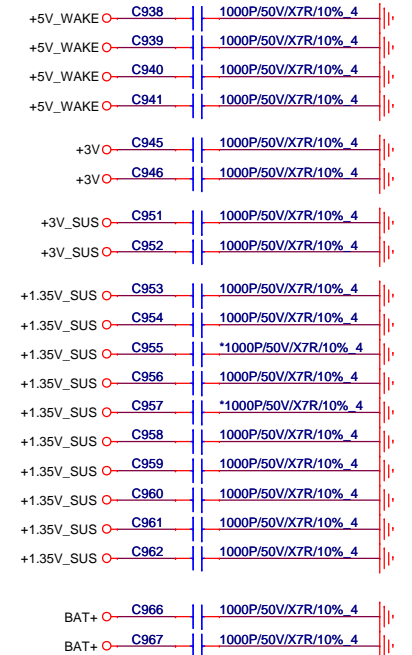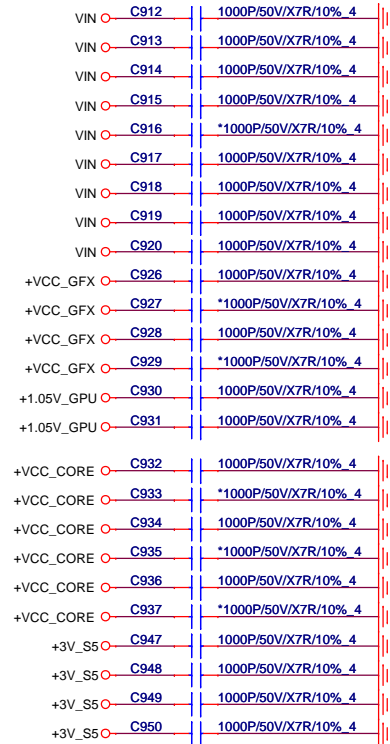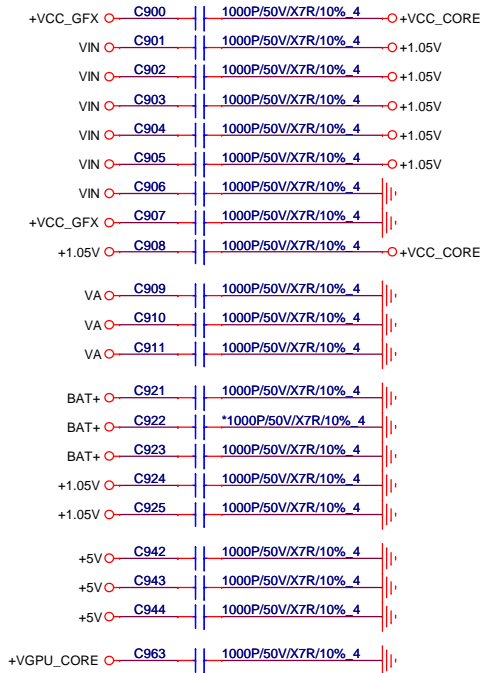

	Quanta P/N	Vendor P/N	Foot Print
14 "	DFFC24FS002	88483-2441-FN	88483-2441-fn-24p-rdv_ab
15 "	DFFC26FR039	50503-02601-001	88513-2641-26p-l-smt

- Level 1 Environment-related Substances Should Never be Used.
- Recycled Resin and Coated Wire should be procured from Green Partners.



Quanta Computer Inc.
PROJECT : GD5

Size	Document Number	Rev
	HOLE/EMI/KB	1A
Date:	Thursday, October 25, 2012	Sheet 40 of 41

USB PORT Architecture	
PORT 0	USB3.0
PORT 1	USN2.0
PORT 2	USN2.0
PORT 3	USB2.0
PORT 4	N/A
PORT 5	N/A
PORT 6	N/A
PORT 7	N/A
PORT 8	N/A
PORT 9	WiMax/BT
PORT 10	Camera
PORT 11	N/A
PORT 12	N/A
PORT 13	N/A

PCIE BUS	
PORT 1	WLAN Port
PORT 2	CARD READER
PORT 3	GLAN(RTL8111E)
PORT 4	N/A
PORT 5	N/A
PORT 6	N/A
PORT 7	N/A
PORT 8	N/A

SATA BUS	
PORT 0	HDD
PORT 1	N/A
PORT 2	N/A
PORT 3	N/A
PORT 4	ODD
PORT 5	N/A

SM BUS	MBCLK/MBDATA	WRITE	READ	Function
ISL88731CHRTZ	0001 001X	0001 0010	0001 0011	Charger
AMD Thames	0100 0001	-	0100 0001	Graphice
LIS331DL	0011 101X	0011 1010	0011 1011	G Sensor

SM BUS	MBCLK_BAT/MBDATA_BAT	WRITE	READ	Function
VGP-BPS26	0001 011X	0001 0110	0001 0111	Battery

SM BUS	SMB_PCH_CLK/SMB_PCH_DAT	WRITE	READ	Function
DIMM Module0	1010 000X	1010 0000	1010 0001	DDRIII
DIMM Module 1	1010 010X	1010 0100	1010 0101	DDRIII
Synaptics	0010 110X	0010 1100	0010 1101	Click PAD

	R363(High) R362(Low)	R294(High) R297(low)
	Board ID3	Board ID0
14"/HK6	0	0
15"/HK5	0	1
17"/HK7	1	0

Board ID1 (VRAM Vendor)	Samaung(1)	Hynix(0)
R47(High)	Stuff	No Stuff
R48(Low)	No Stuff	Stuff

Board ID2		
14" 4PCS	1G	512M
15" 8PCS	1G	2G
R39(High)	Stuff	No Stuff
R27(Low)	No Stuff	Stuff

PCBA SKU	Discrete	UMA
R277(Pull High)	Stuff	No Stuff
R275(Pull Low)	No Stuff	Stuff

	S0	S3	DS3	S4	S5 (Charger Enable)	S5 (Charger Disable)
RUN_ON	H	L	L	L	L	L
+3V	H	L	L	L	L	L
+5V	H	L	L	L	L	L
+0.75V_DDR_VTT	H	L	L	L	L	L
+1.05V	H	L	L	L	L	L
+0.85V	H	L	L	L	L	L
+1.5V	H	L	L	L	L	L
+1.8V	H	L	L	L	L	L
+1.8V_GPU	H	L	L	L	L	L
+1.0V_GPU	H	L	L	L	L	L
+VGPU_CORE	H	L	L	L	L	L
+VCC_GFX	H	L	L	L	L	L
+VCC_CORE	H	L	L	L	L	L
SUS_ON	H	H	H	L	L	L
+1.5V_SUS	H	H	H	L	L	L
S5_ON	H	H	L	H	L	L
+5V_S5	H	H	L	H	L	L
+3V_S5	H	H	L	H	L	L
EC_WAKE_ON	H	H	H	H	H	L
+3V_WAKE	H	H	H	H	H	L
+5V_WAKE	H	H	H	H	H	L
DEEP_EC_EN	H	H	H	H	L	L
+3V_S5_DSW	H	H	H	H	L	L
+3V_SUS	H	H	L	L	L	L