



1. STANDARD APPEARANCE (60MB18V0-MB0A01)




2. BLOCK DIAGRAM

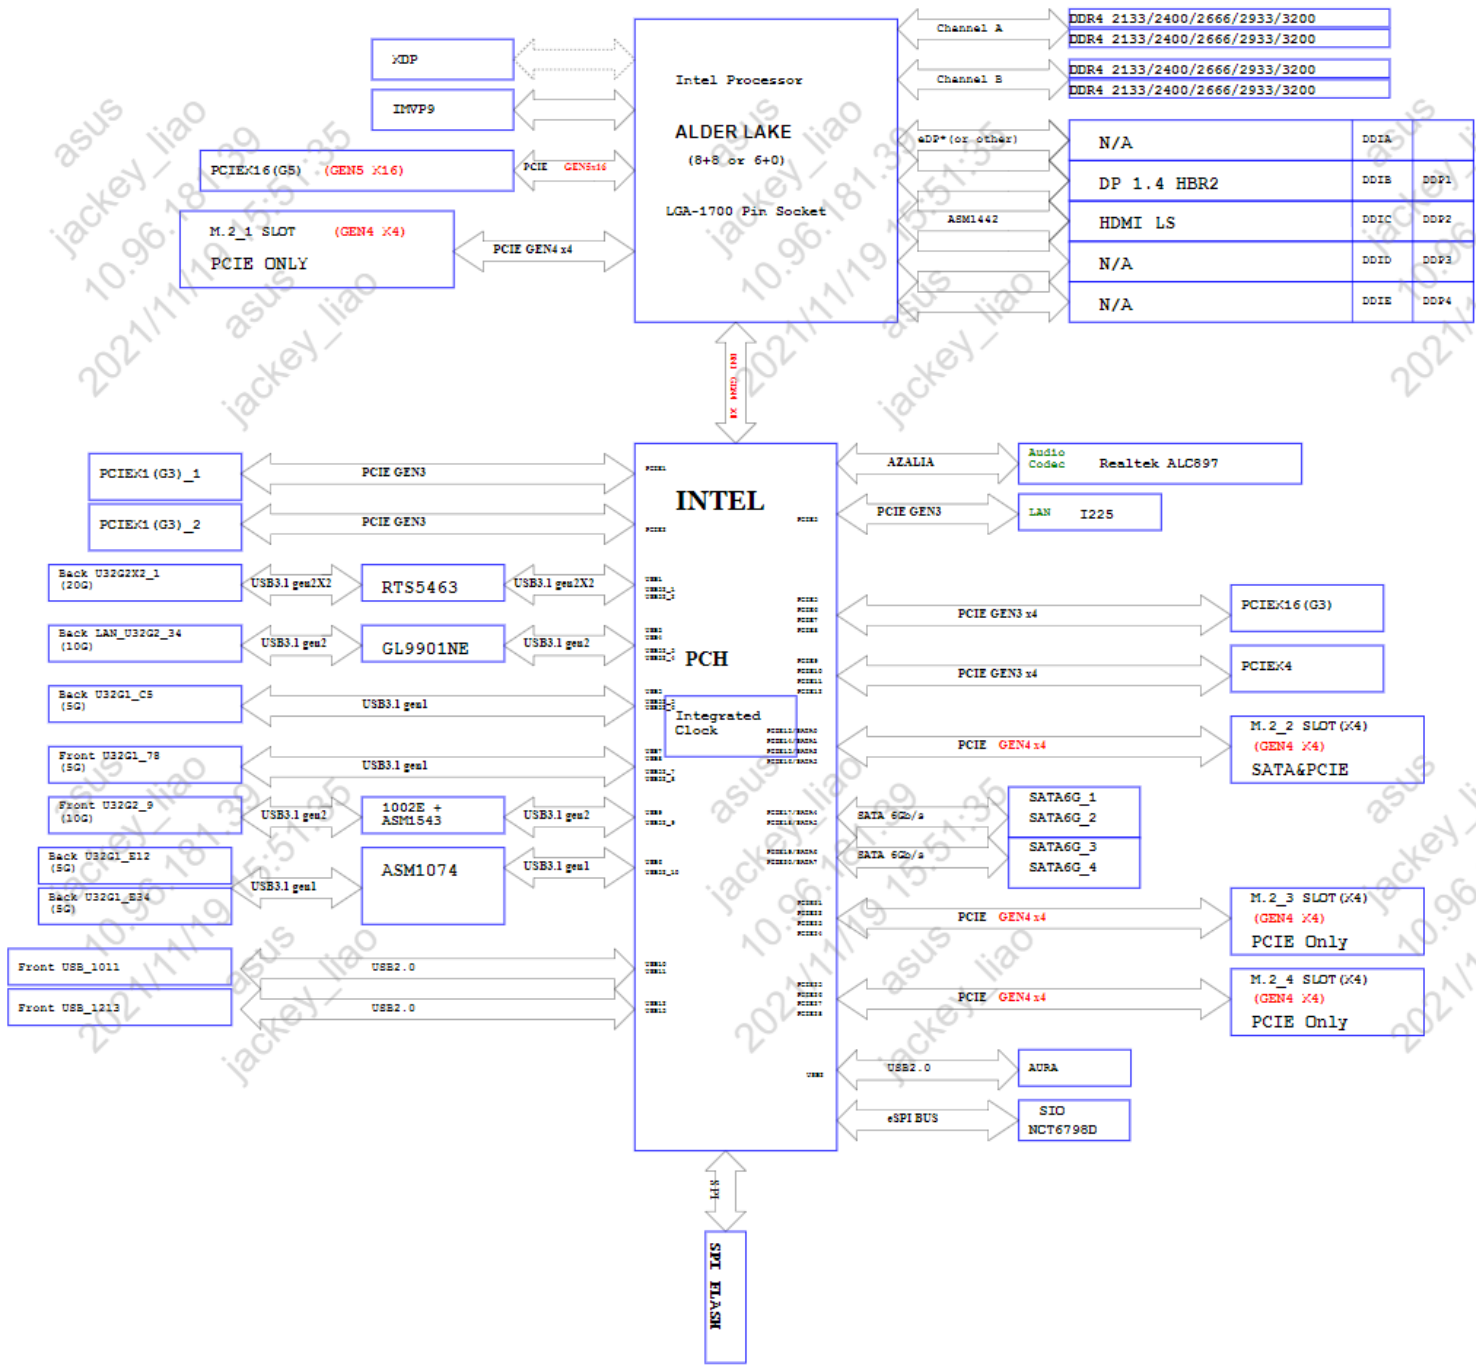


3. POWER FLOW

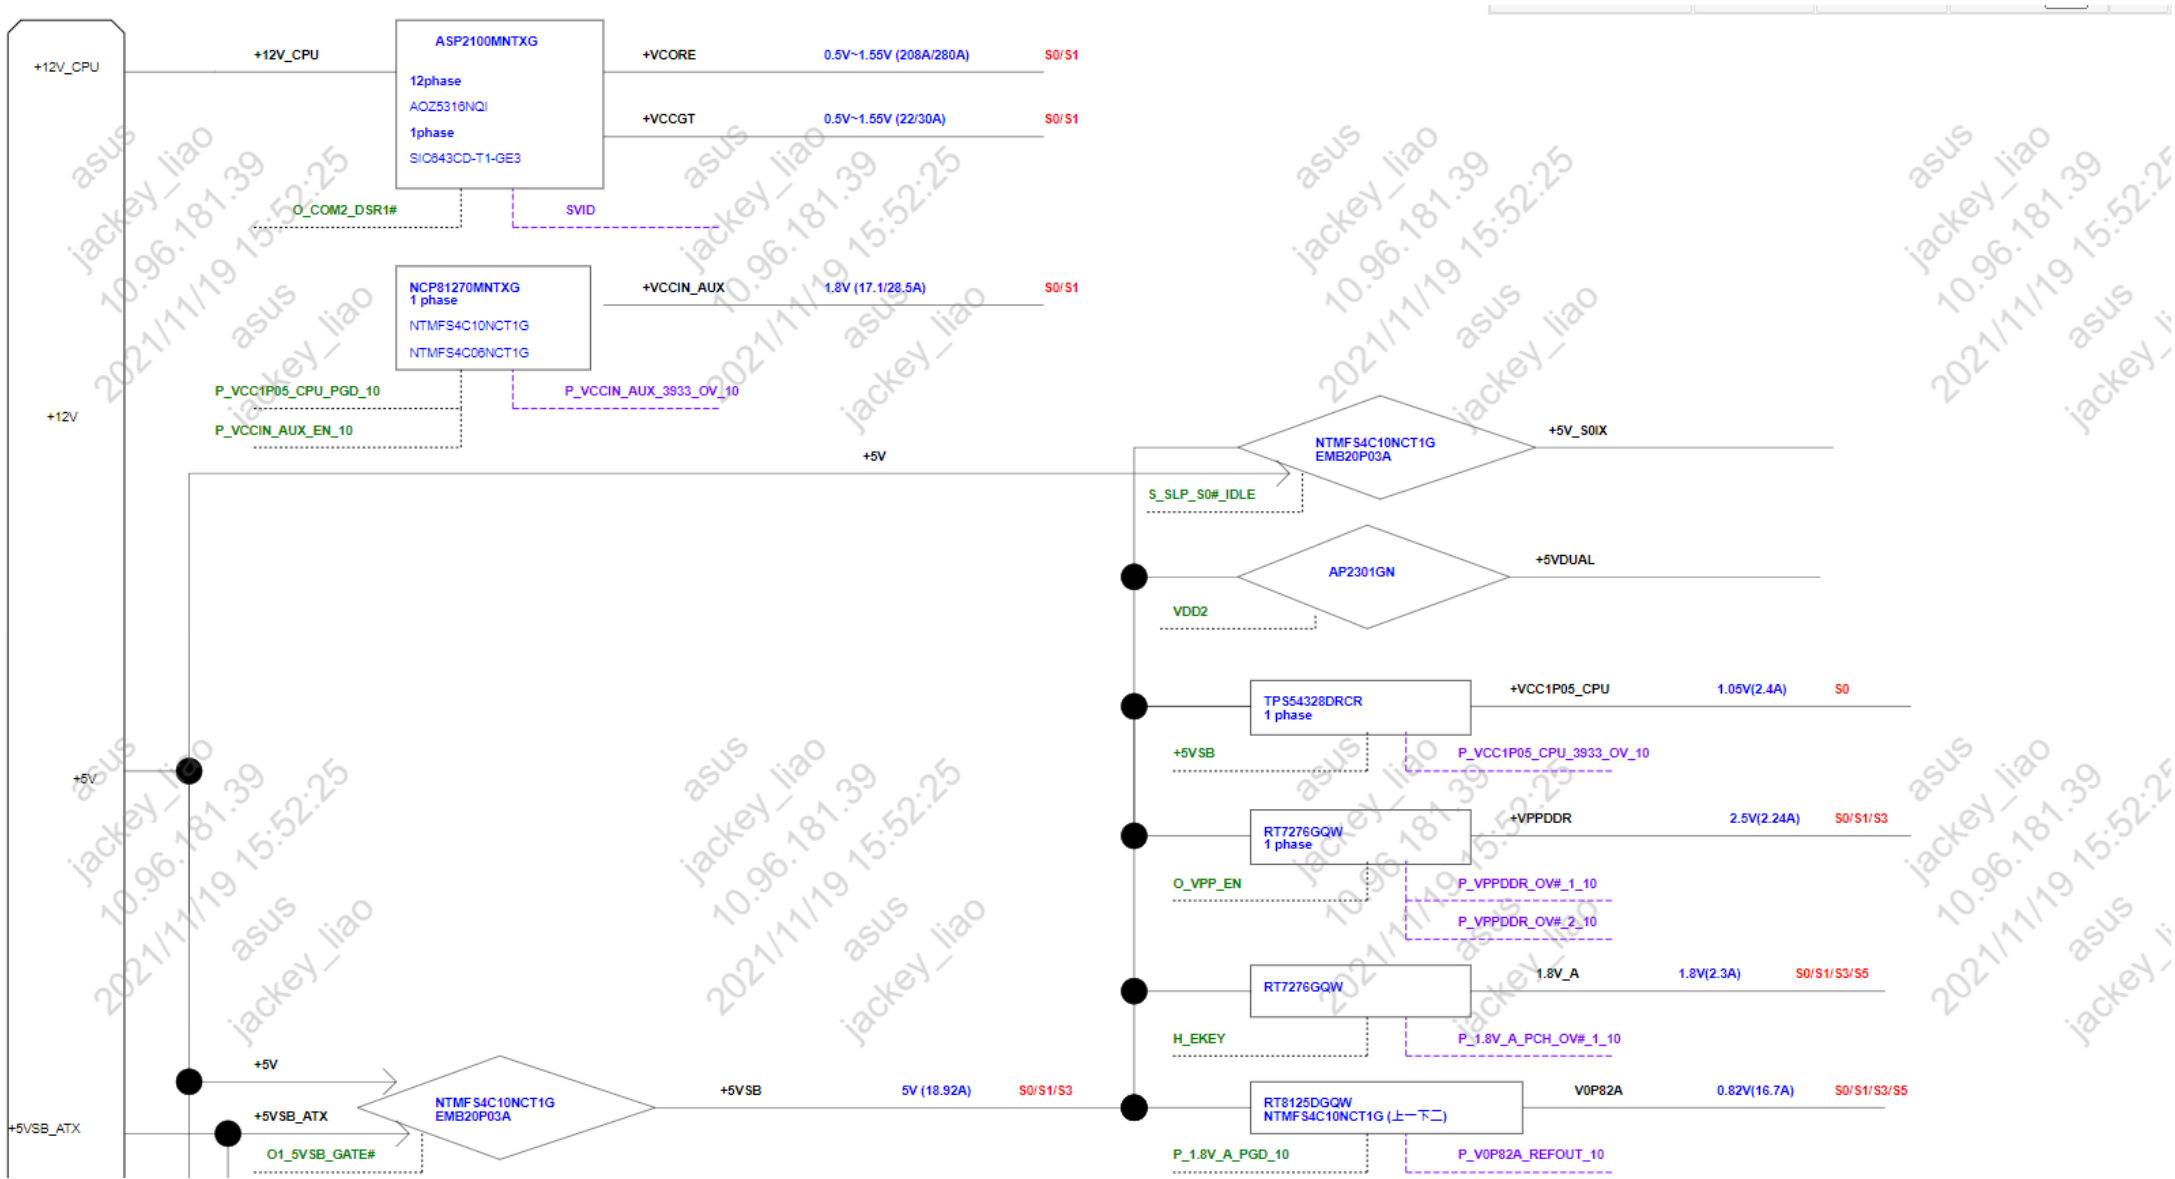


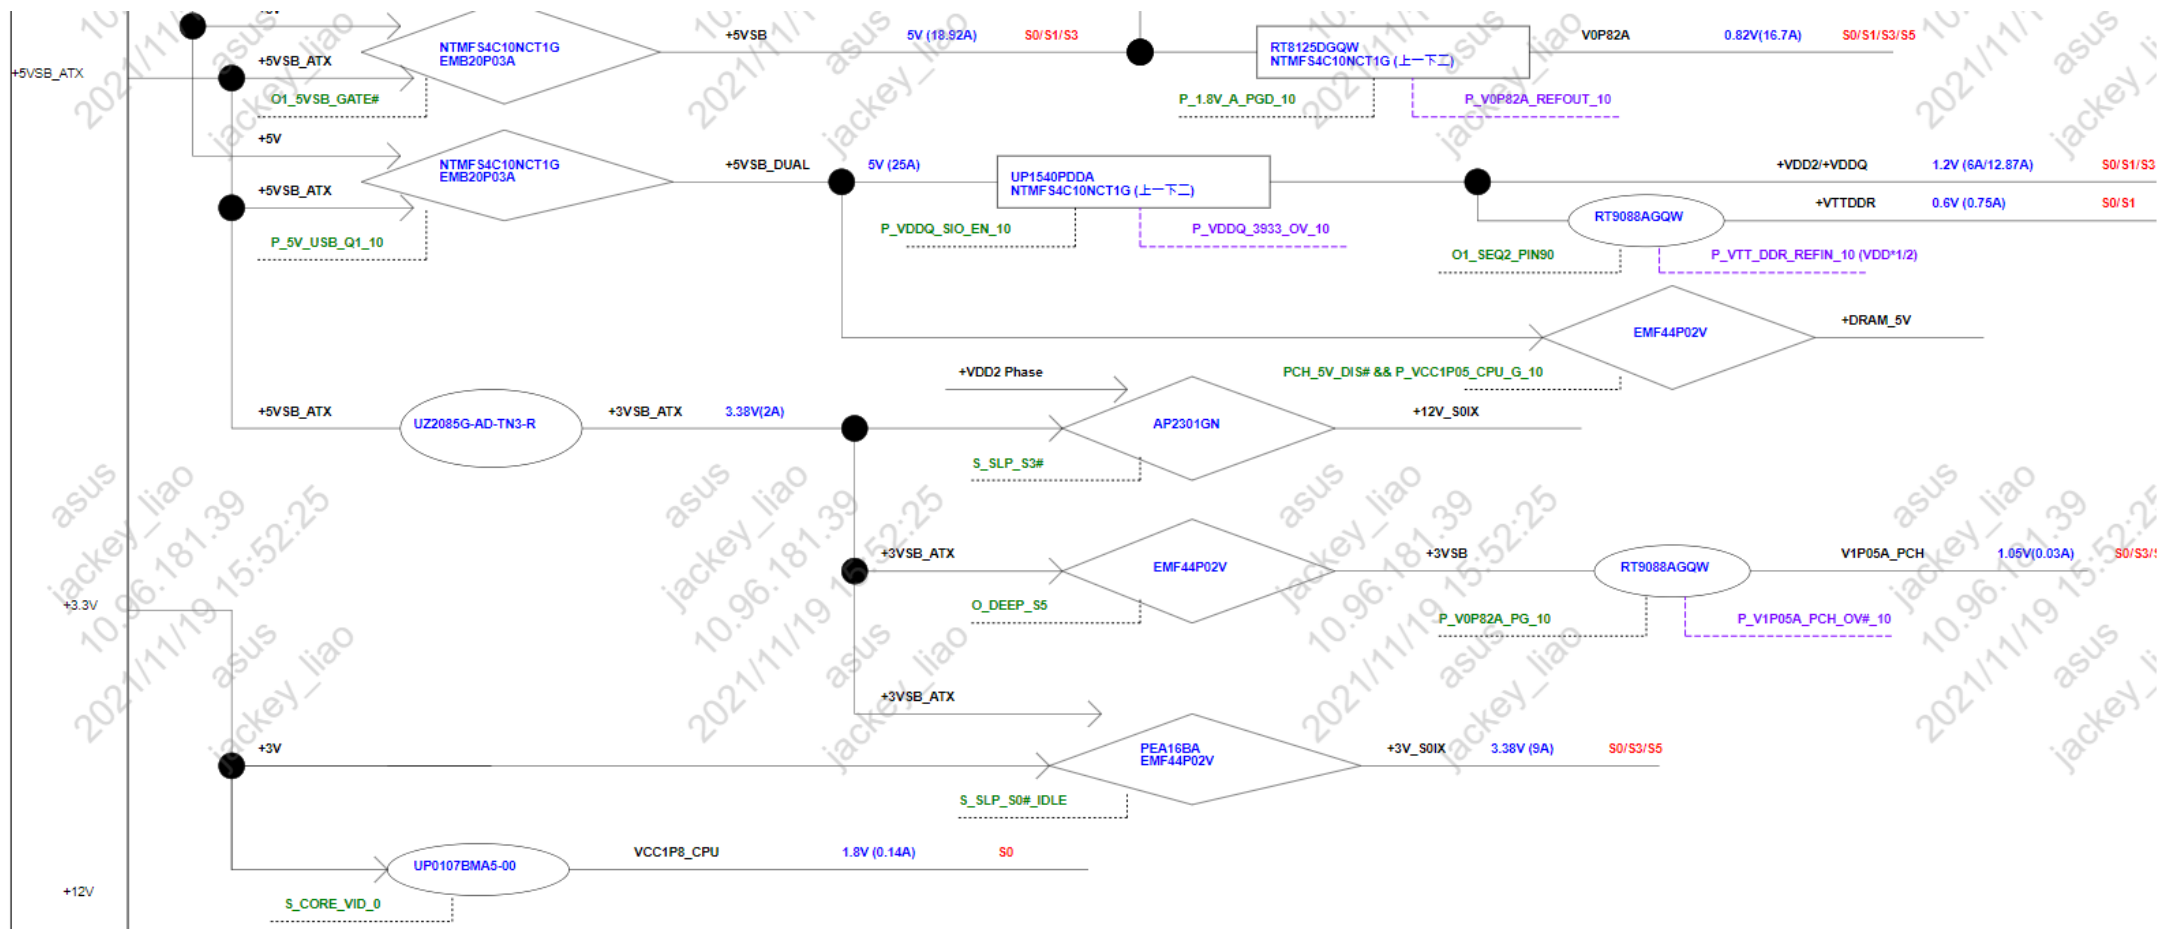


4. POWER ON SEQUENCE

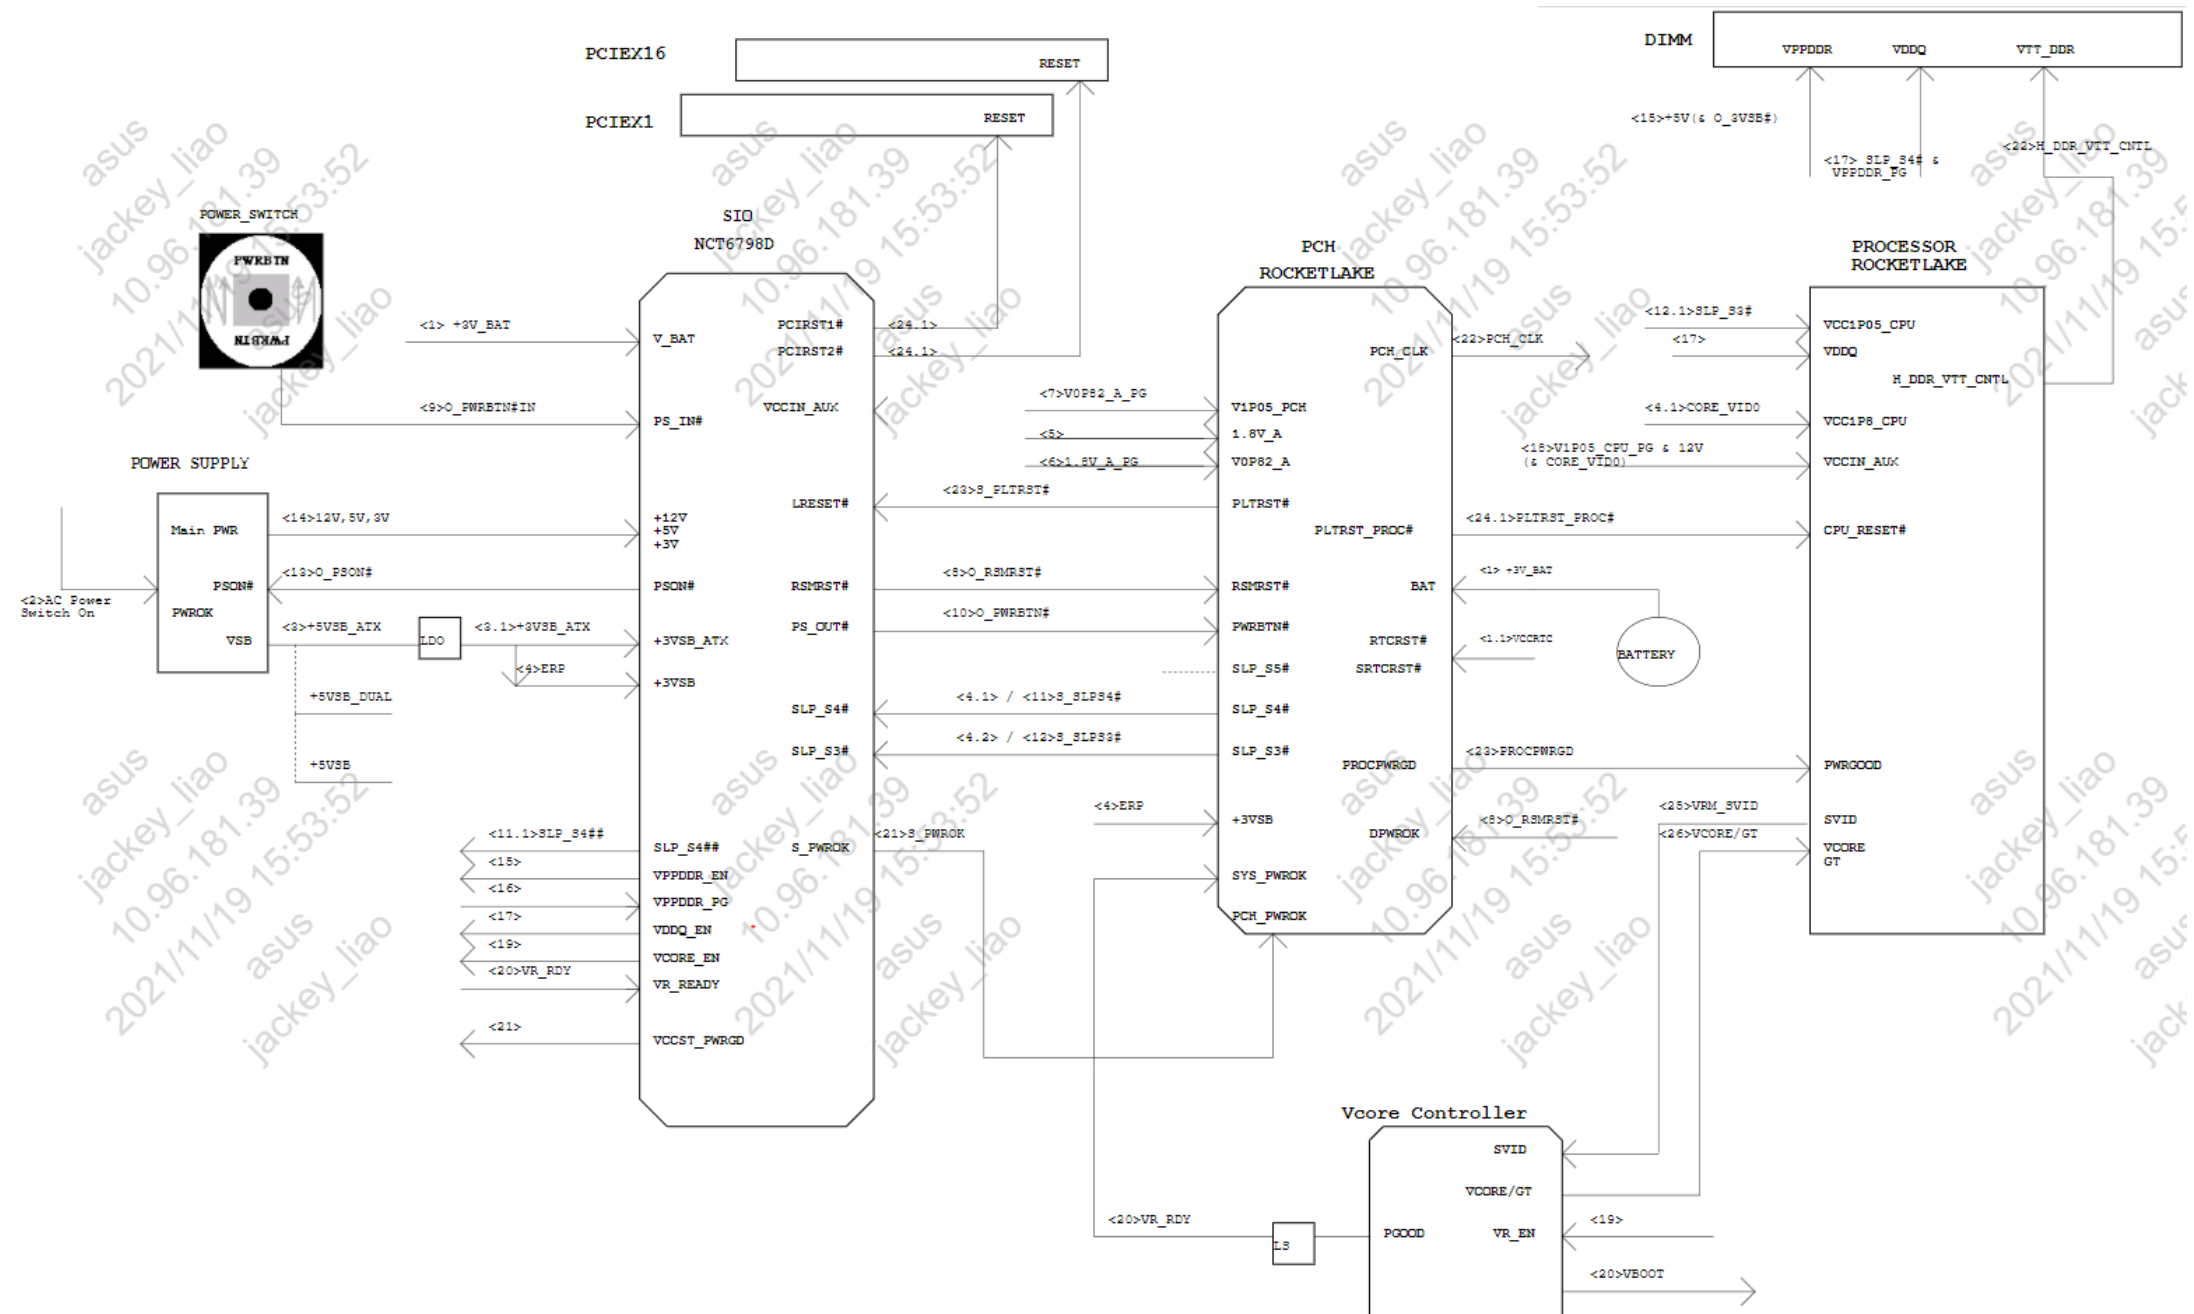

5. Timing Diagram for G3 to S0

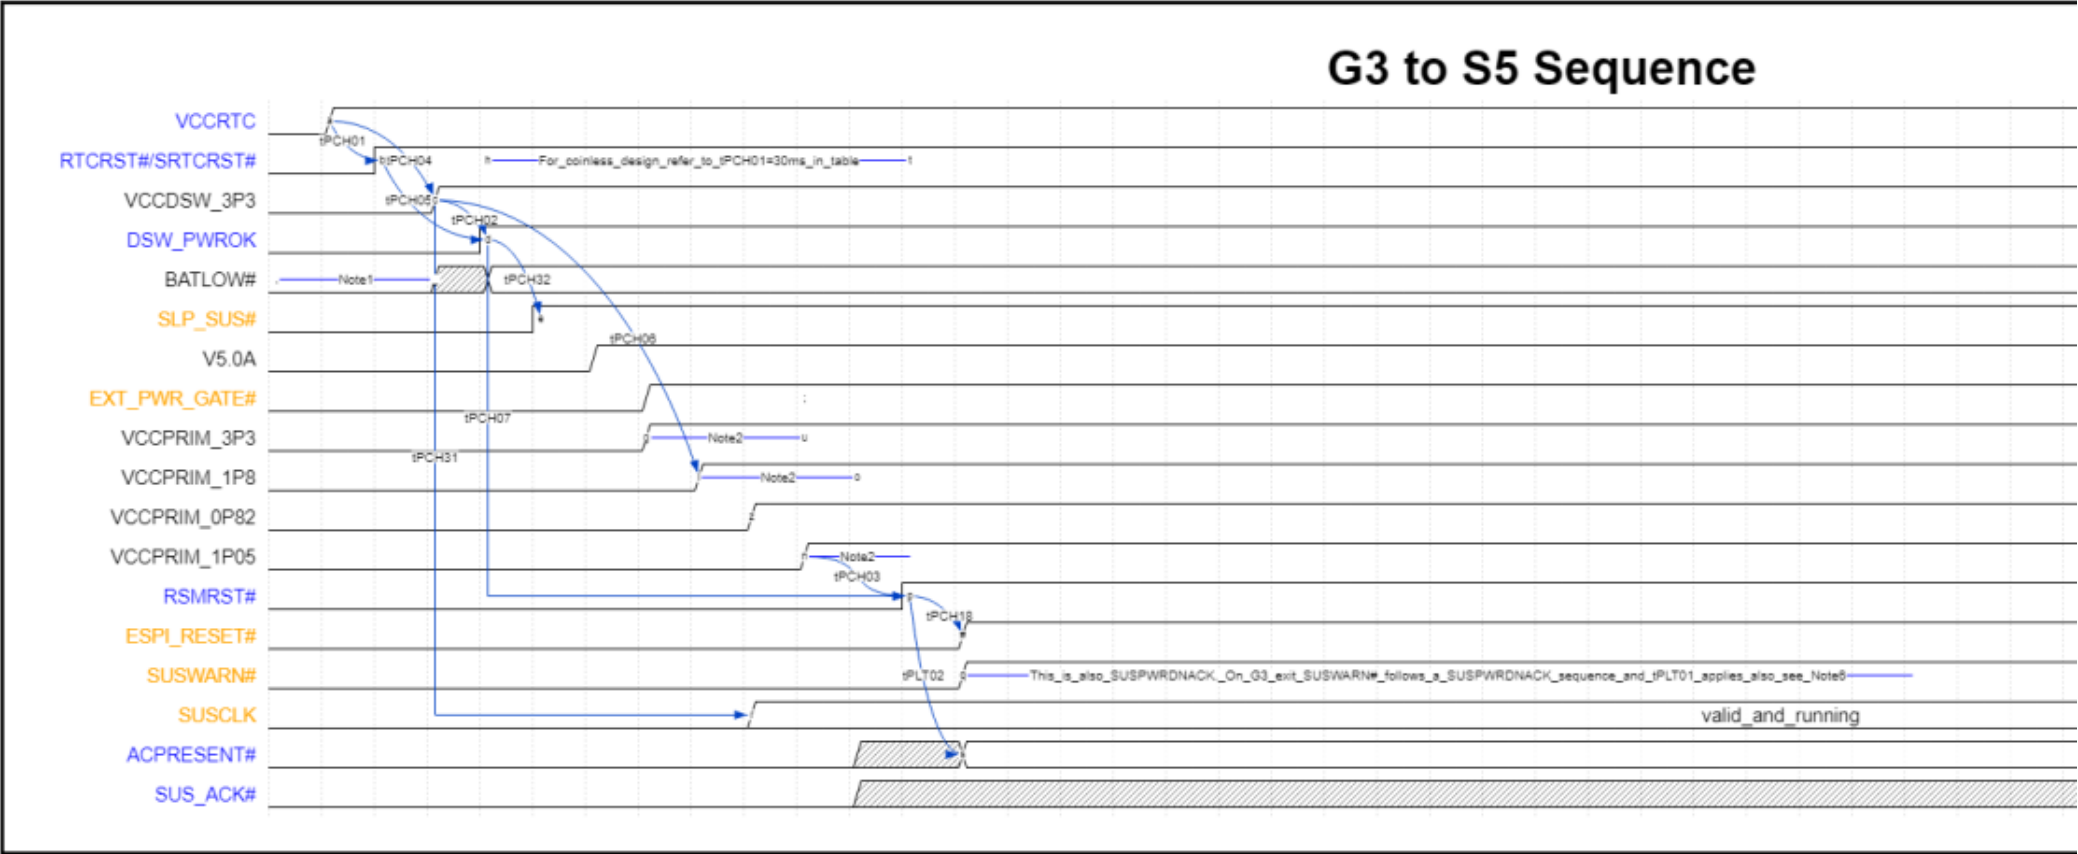

S5 to S0 Sequence

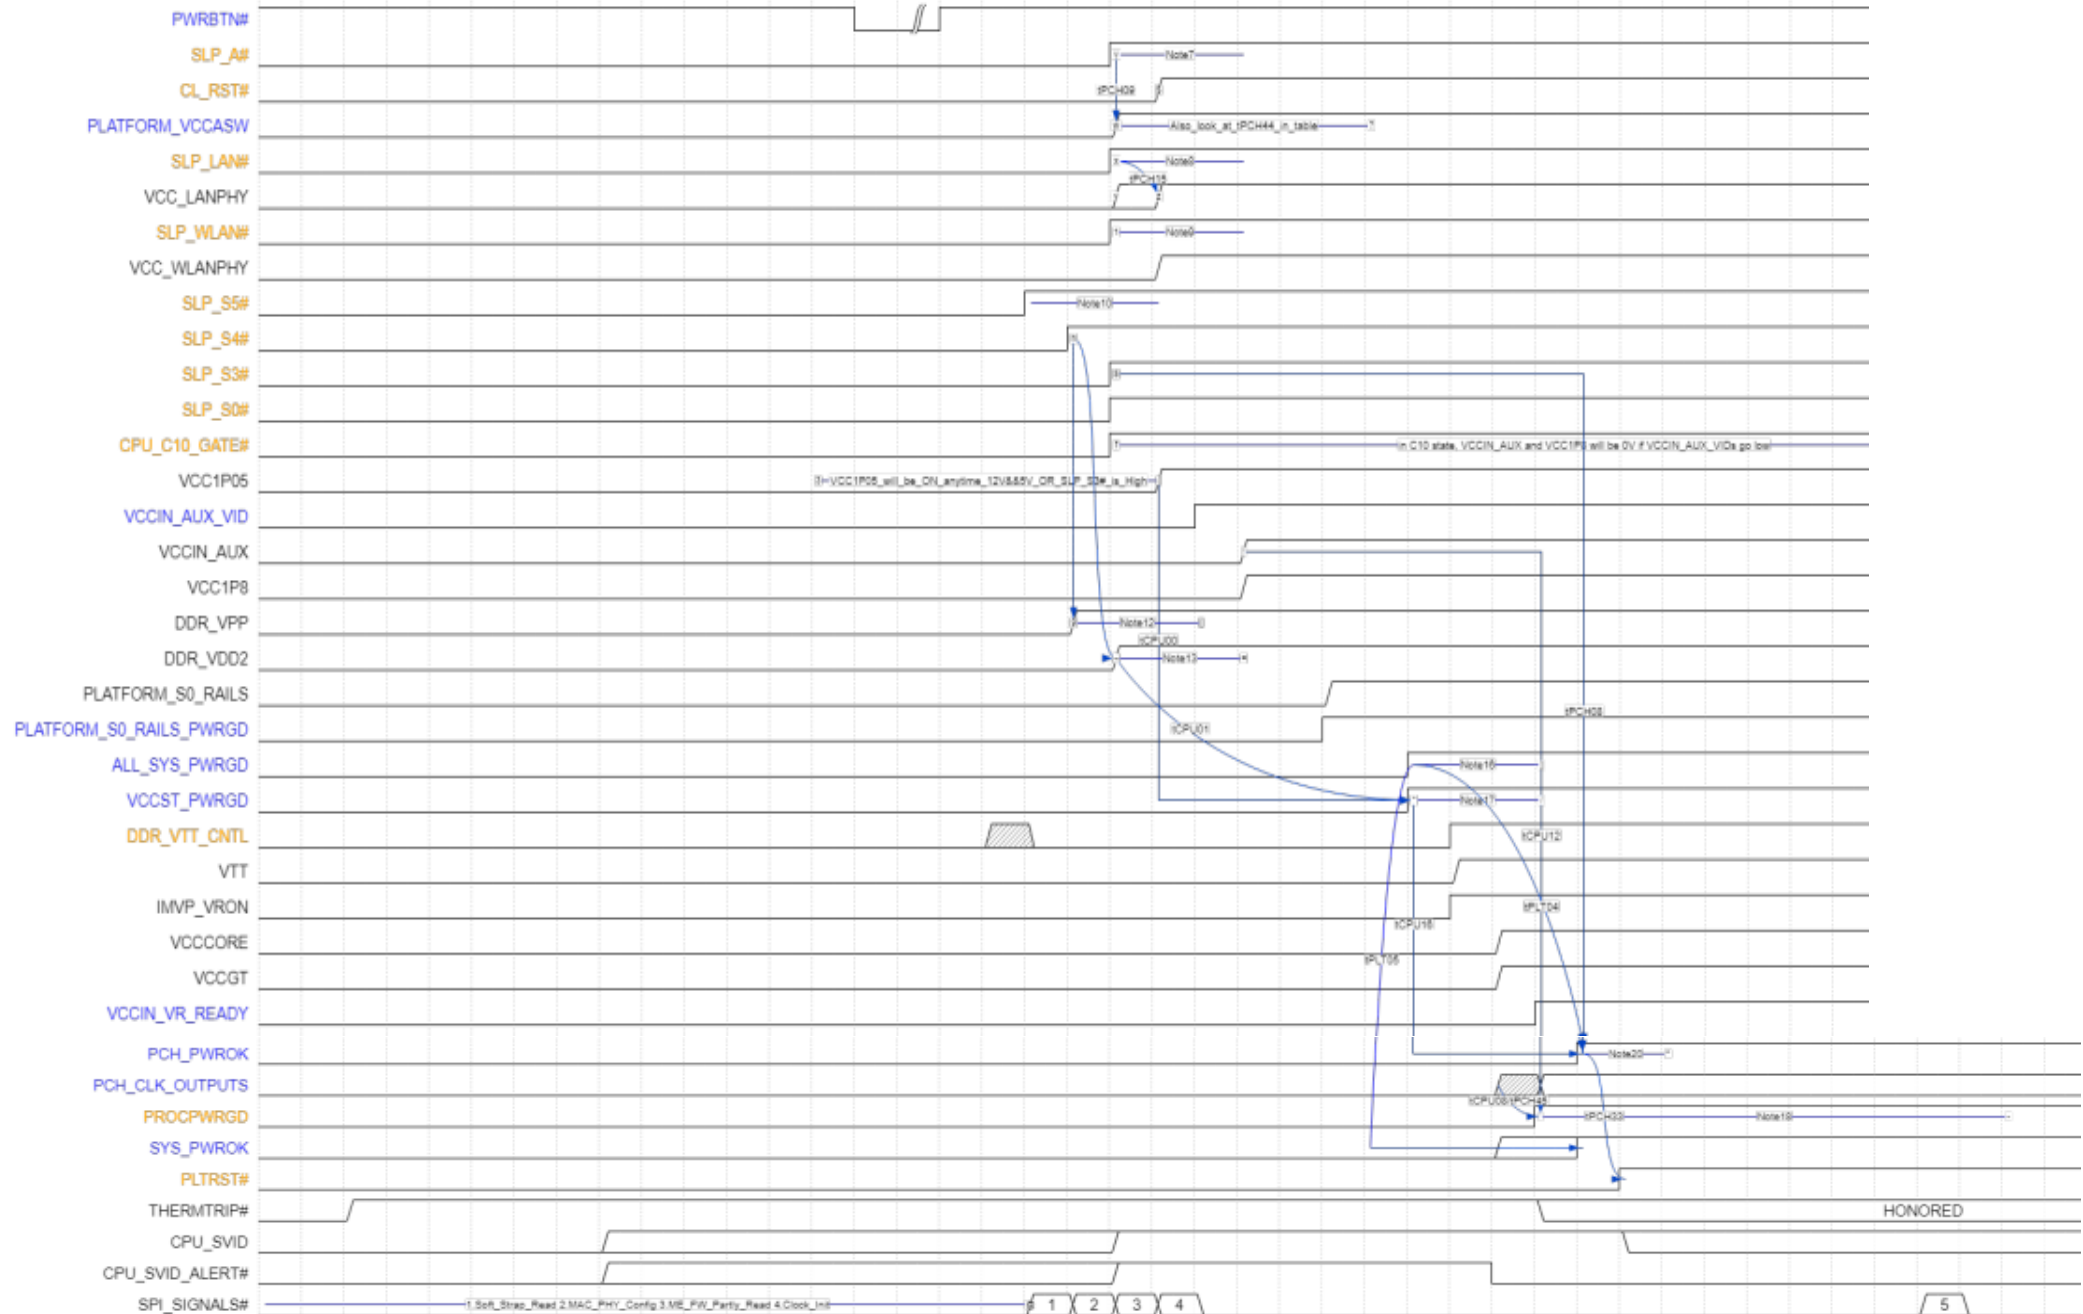

EC

SIO

CNVI

XTAL


XTAL

100MHz

PCIE_X16_3

100MHz


M.2_3 (PCH)

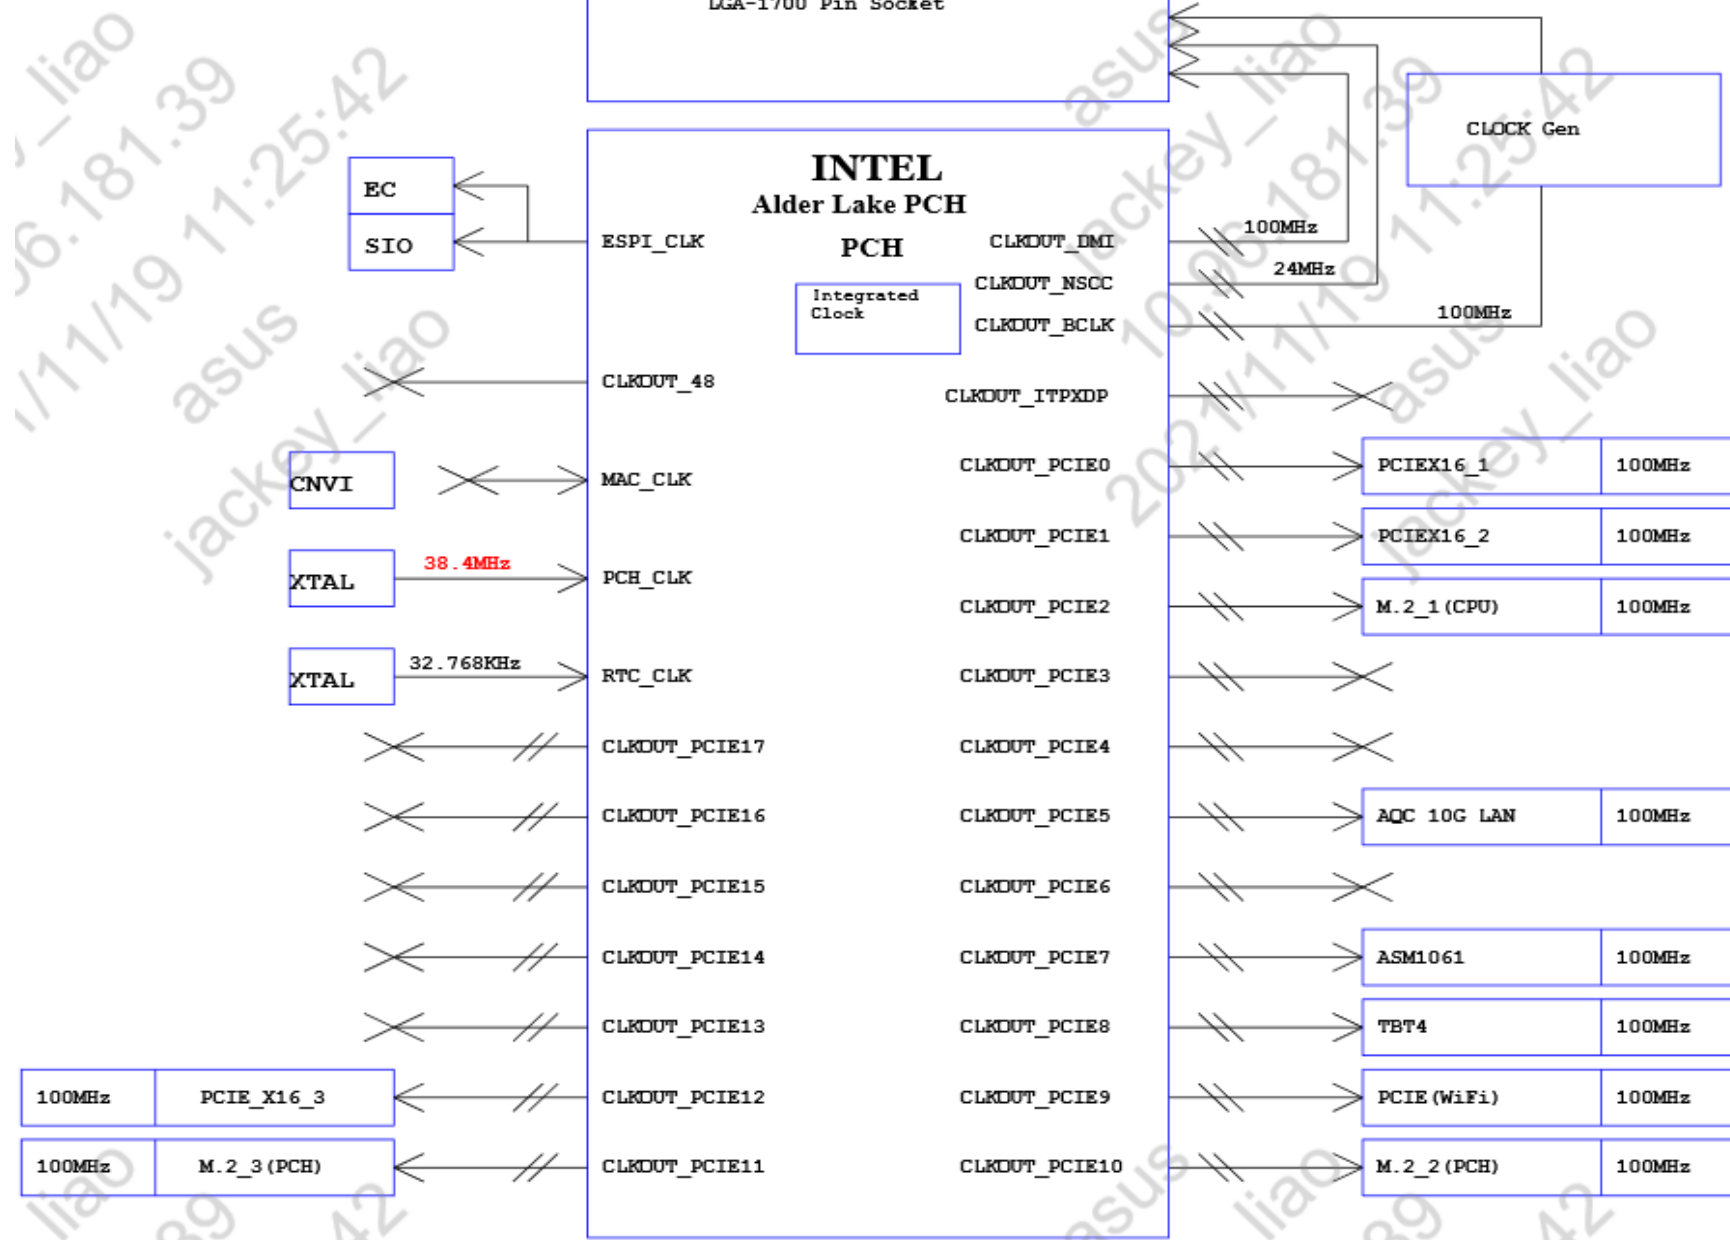

7. Socket reflow profile

1> 13021-00020000: FOXCONN

- Reflow profile for reference

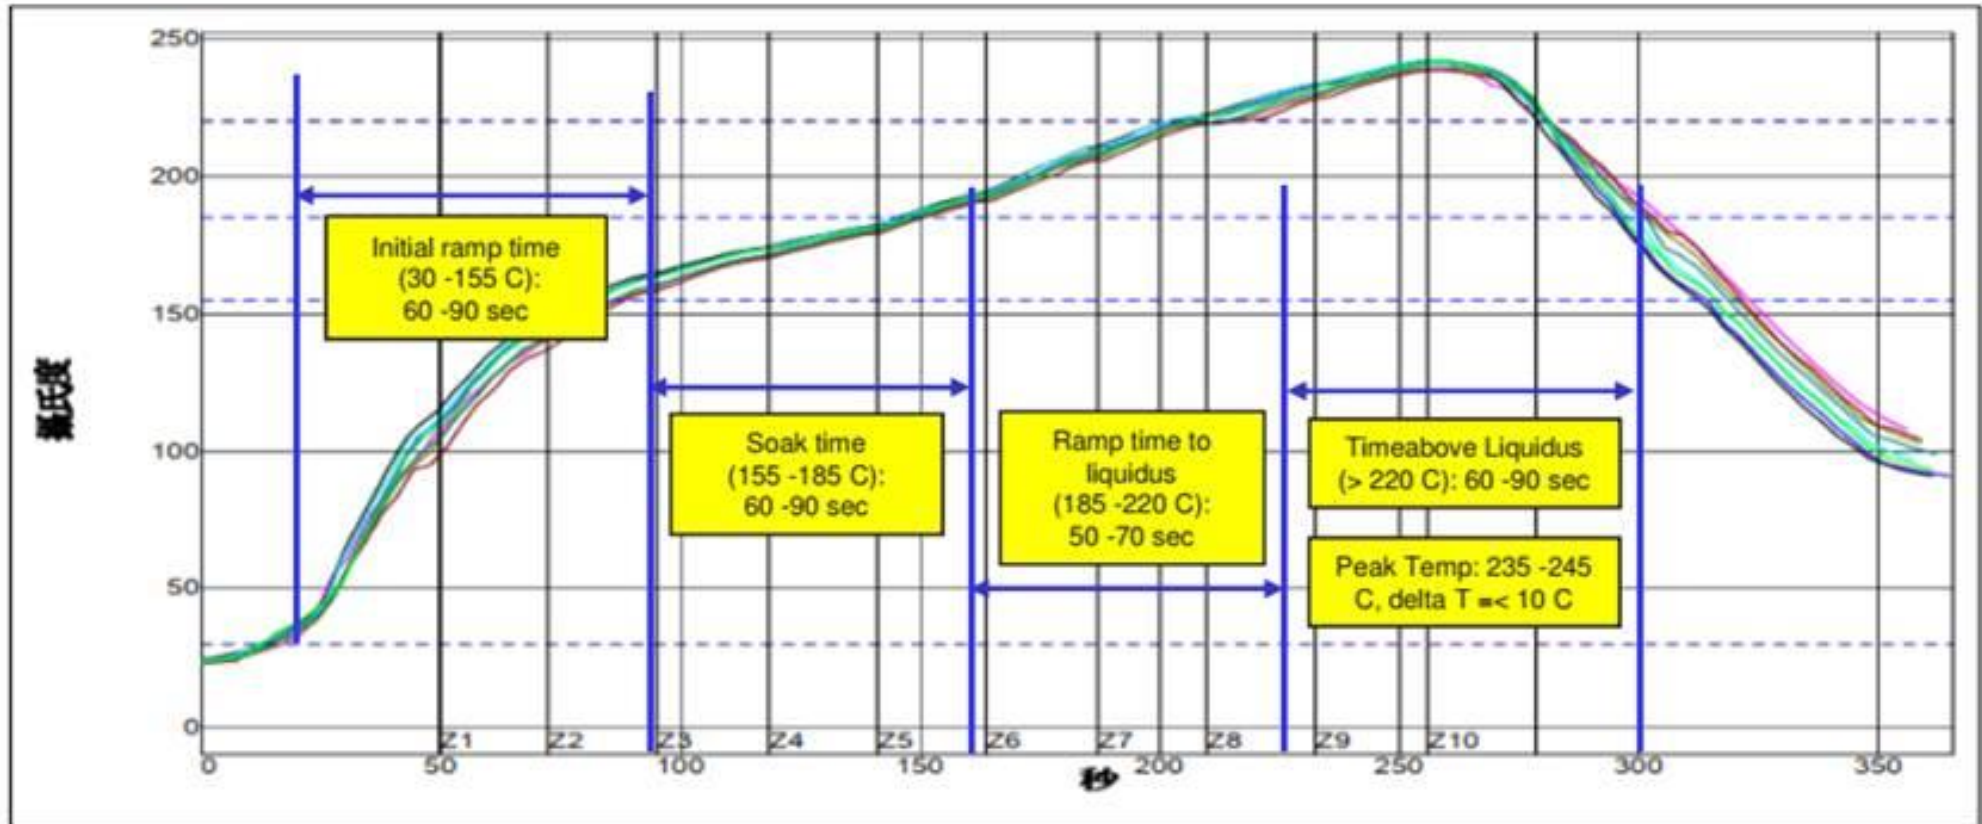

Note:

➤Reflow Profile must follow Lotes requirement

