

Model Name: GA-B85M-DS3H-A Revision 1.0

SHEET

TITLE

01	COVER SHEET
02	BOM & PCB MODIFY HISTORY
03	BLOCK DIAGRAM
04	CPU_LGA1150-A
05	CPU_LGA1150-B
06	CPU_LGA1150-C
07	DDR III CHANNEL A 1,2
08	DDR III CHANNEL B 1,2
09	PCH_FDI,DMI,USB,PCIE,NVRAM
10	PCH_DP,CLK BUFFER
11	PCH_HOST,SATA,PCI
12	PCH_GPIO,CTRL,AUDIO
13	PCH_PWR,GND
14	PCI EXPRESS*16 SLOT
15	PCI EXPRESS X1 *2 SLOT
16	ITE 8620 LPC IO
17	COM,KB_MS_USB,USB30_20
18	HWM,FAN CTRL,OV,-PROCHOT
19	DUAL BIOS
20	FP,FUSB,SPK,SATALED
21	Realtek ALC887-VD2
22	REAR AUDIO JACK
23	REALTEK RTL8111G
24	DISCRETE POWER
25	ATX
26	VCORE ISL95812_1
27	VCORE ISL95812_2

SHEET

TITLE

28	RT8120_DDR POWER
29	LPT, M3 POWER
30	DVI

Gigabyte Technology

Cover Sheet		
Size Custom	Document Number GA-B85M-DS3H-A	Rev 1.0
Date:	Tuesday, December 30, 2014	Sheet 1 of 30

Component value change history


2014/12/31


Data	Change Item	Reason
2013/06/28	ADD RSMRST DELAY	
2013/08/13	Update Rev to 1.1	
	PCIE X16 New Footprint "PCIESLOT-164DN-Q-1"	
2013/08/23		EBOM: 9M85MDS3H-00-11A
2013/09/13	Update to R1.11	
	Follow Crystal Trace Rule	
	SYS_FAN, DDR 0ohm 0402 -> 0603	
	Update Fuse 1206 Footprint "POLYSWITCH-1206-1"	
	Update PPAK Footprint "Q_TDS0N8-GDS-T"	
2013/10/22	NX1: 25M/20p -> 12p	PBOM: 9M85MDS3H-00-11B
	NC7, NX8: 27p -> 10p	
2013/11/04	NC7, NX8: 10p -> 15p	PBOM: 9M85MDS3H-00-11C
2013/11/05	Update to R1.12	PBOM: 9M85MDS3H-00-11D
	Modify NX1 Trace	
2013/11/27	MR17 0ohm -> 0603 FUSE(10FP5-06100B-00R)	PBOM: 9M85MDS3H-00-11E
	ALC887 強壯版 (10HP5-368870-32R)	
2014/02/17	Sales Costdown Rev2.0	
	CPU Power ISL95820 1U2D -> ISL95812 1U1D	
	DVI Non-Level Shift	
	BIOS Size 64M -> 32M	
2014/02/20	SBA線路OPTION,整合電阻成排阻,精簡線路	
2014/02/24	整合電阻成排阻	
2014/02/27	MASK/DEL CAP	
2014/03/07	ADD ESD : NC3,NC4 (22P)	
2014/03/11	NR6改SHT PAD	
2014/03/12	WBC28,30,25,27,31解開MASK	
	COM:BLACK,F_AUDIO:GRAY	
	DEL後窗AUDIO 180P	

Circuit or PCB layout change


[illegible]

BLOCK DIAGRAM

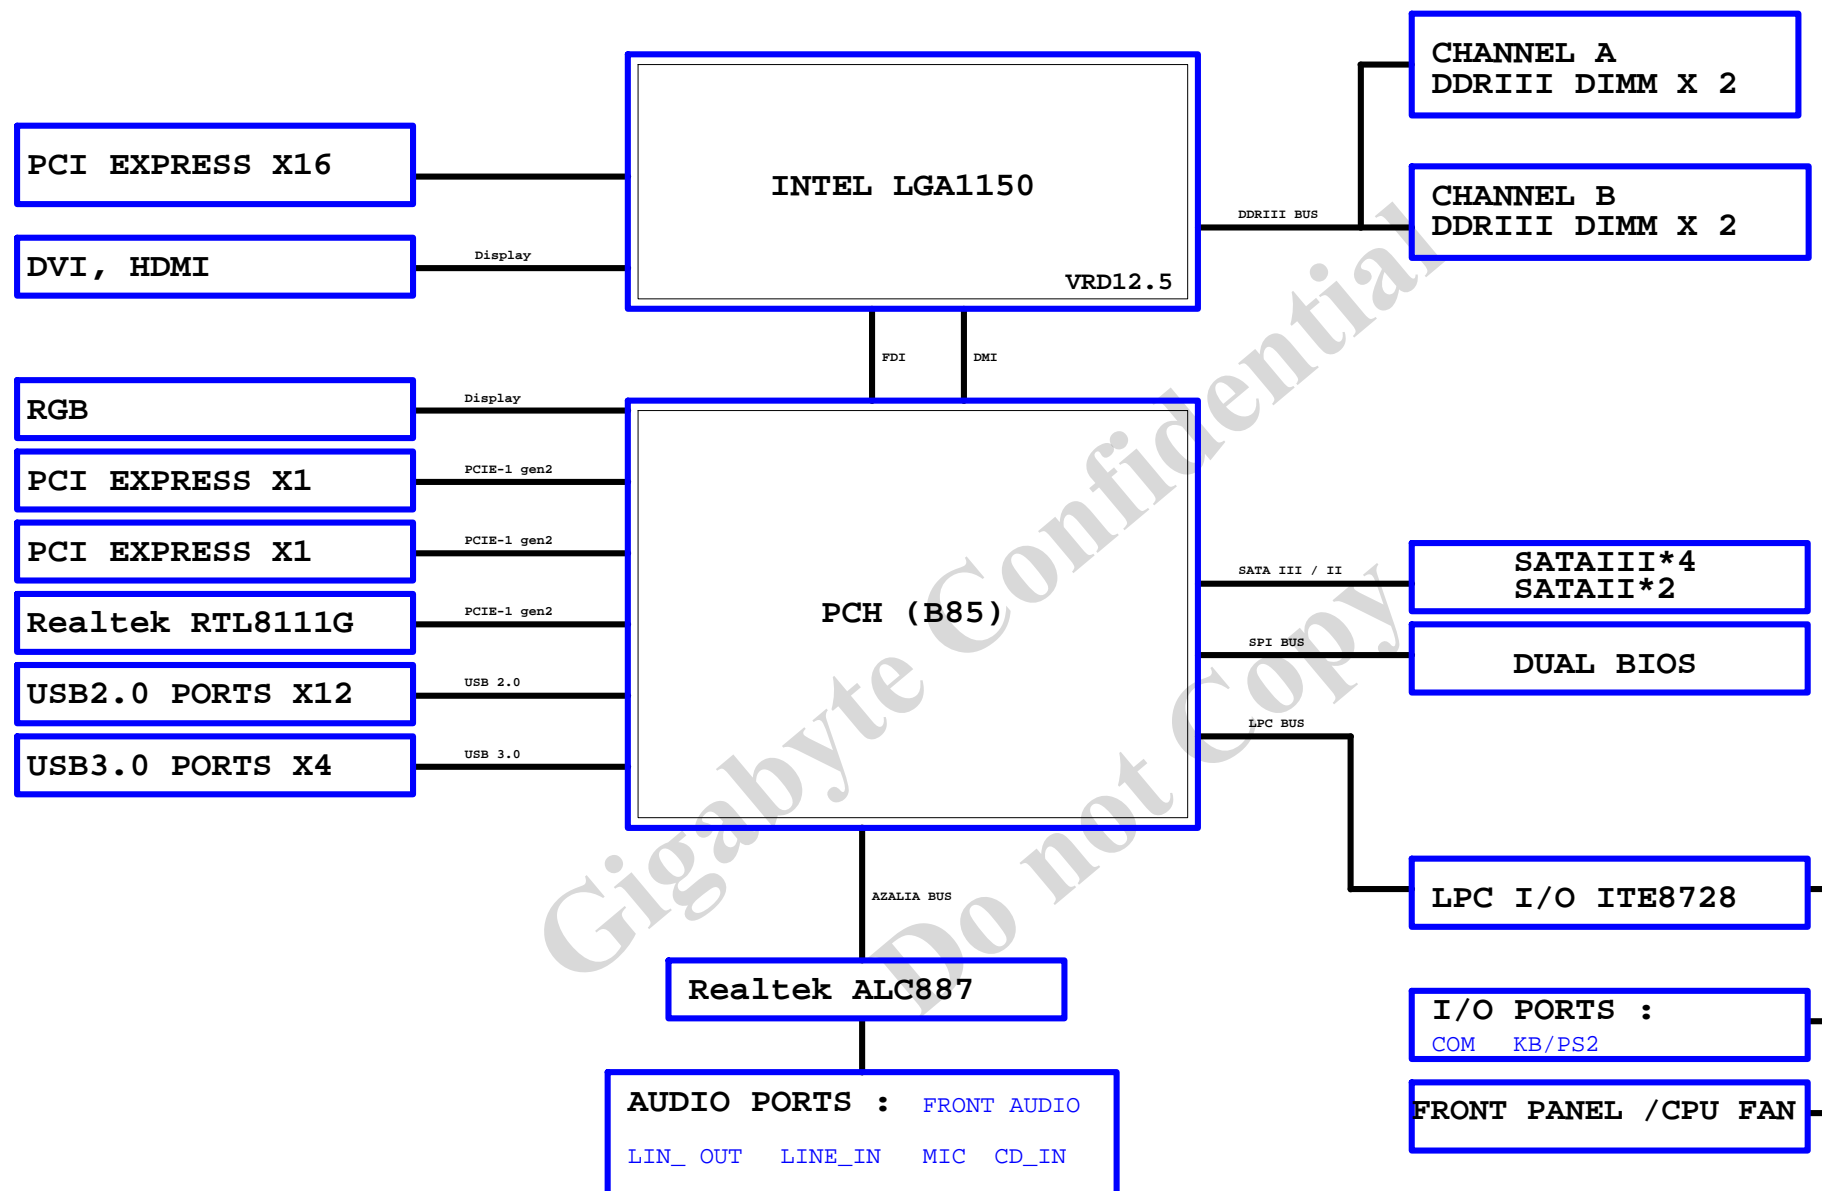





PCIEX16:16/5/5/5/16(breakout min 10/4/4/4/10)
Impedance=80 +- 17.5%



CPU	PU/PD
-----	-------



SM REF



Gigabyte Technology

Title				CPU LGA1150-A			
Size	Document Number						Rev
Custom	GA-B85M-DS3H-A						1.0
Date:	Tuesday, December 30, 2014			Sheet	4 of 30		

LGA1150

(A)

LGA1150


(B)

LGA1150

(CR)

LGA1150A

LGA1150B

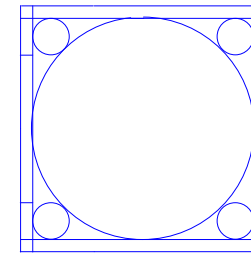CR
CPU RETAINTION/X

LGA1150_P



ILM_BP/1156/CSP/ILM_BP/1156/CSP/[12KRC-0F0001-52R_12KRC-0F0001-51R]

DDR BUS

[7] MODT_A[0..3] <=> MODT_A10..31

[8] MODT_B[0..3] <=> MODT_B10..31

[7] MDA[0..63] <=> MDA10..631

[8] MDB[0..63] <=> MDB10..631

[7] DQSA[0..7] <=> DQSA10..71

[7] -DQSA[0..7] <=> -DQSA10..71

[7] MAA[0..15] <=> MAA10..151

[8] MAAB[0..15] <=> MAAB10..151

[8] DQSB[0..7] <=> DQSB10..71

[8] -DQSB[0..7] <=> -DQSB10..71

Gigabyte Technology


Title			CPU LGA1150-B		
Size			Document Number		
Custom			GA-B85M-DS3H-A		
Date:			Rev		
Tuesday, December 30, 2014			1.0		
Sheet			5 of 30		


MAAA0	AU13	DDR0_MA0	DDR0_D00	AD38	MDA0
MAAA1	AV16	DDR0_MA1	DDR0_D01	AD39	MDA1
MAAA2	AU16	DDR0_MA2	DDR0_D02	AF38	MDA2
MAAA3	AW17	DDR0_MA3	DDR0_D03	AF39	MDA3
MAAA4	AU17	DDR0_MA4	DDR0_D04	AD37	MDA4
MAAA5	AW18	DDR0_MA5	DDR0_D05	AD40	MDA5
MAAA6	AV17	DDR0_MA6	DDR0_D06	AE37	MDA6
MAAA7	AT18	DDR0_MA7	DDR0_D07	AF40	MDA7
MAAA8	AU18	DDR0_MA8	DDR0_D08	AH40	MDA9
MAAA9	AT19	DDR0_MA9	DDR0_D09	AH39	MDA10
MAAA10	AW11	DDR0_MA10	DDR0_D10	AK38	MDA10
MAAA11	AV19	DDR0_MA11	DDR0_D11	AK39	MDA11
MAAA12	AU19	DDR0_MA12	DDR0_D12	AH37	MDA12
MAAA13	AY10	DDR0_MA13	DDR0_D13	AH38	MDA13
MAAA14	AT20	DDR0_MA14	DDR0_D14	AK37	MDA14
MAAA15	AU21	DDR0_MA15	DDR0_D15	AK40	MDA15
MODT_A0	AW10	DDR0_ODT0	DDR0_D16	AM40	MDA17
MODT_A1	AY8	DDR0_ODT1	DDR0_D17	AM39	MDA21
MODT_A2	AW9	DDR0_ODT2	DDR0_D18	AP38	MDA18
MODT_A3	AU8	DDR0_ODT3	DDR0_D19	AP39	MDA19
			DDR0_D20	AM37	MDA20
			DDR0_D21	AM38	MDA16
			DDR0_D22	AP37	MDA22
			DDR0_D23	AP40	MDA23
			DDR0_D24	AW37	MDA29
			DDR0_D25	AU35	MDA26
			DDR0_D26	AU35	MDA27
			DDR0_D27	AT37	MDA28
			DDR0_D28	AU37	MDA24
			DDR0_D29	AT35	MDA30
			DDR0_D30	AW35	MDA31
			DDR0_D31	AY8	MDA33
			DDR0_D32	AU6	MDA37
			DDR0_D33	AW4	MDA34
			DDR0_D34	AU4	MDA35
			DDR0_D35	AW6	MDA36
			DDR0_D36	AW6	MDA32
			DDR0_D37	AW4	MDA38
			DDR0_D38	AW4	MDA39
			DDR0_D39	AR1	MDA41
			DDR0_D40	AR4	MDA45
			DDR0_D41	AN3	MDA42
			DDR0_D42	AN4	MDA43
			DDR0_D43	AR2	MDA44
			DDR0_D44	AR3	MDA40
			DDR0_D45	AN2	MDA46
			DDR0_D46	AN1	MDA47
			DDR0_D47	AL1	MDA49
			DDR0_D48	AL4	MDA53
			DDR0_D49	AL4	MDA50
			DDR0_D50	AJ4	MDA51
			DDR0_D51	AL2	MDA52
			DDR0_D52	AL3	MDA48
			DDR0_D53	AJ2	MDA54
			DDR0_D54	AJ1	MDA55
			DDR0_D55	AG1	MDA57
			DDR0_D56	AG4	MDA61
			DDR0_D57	AE3	MDA58
			DDR0_D58	AE4	MDA59
			DDR0_D59	AG2	MDA60
			DDR0_D60	AG3	MDA56
			DDR0_D61	AE2	MDA62
			DDR0_D62	AE1	MDA63
			DDR0_D63	AE39	DQSA0
			DDR0_D64	AJ39	DQSA1
			DDR0_D65	AN39	DQSA2
			DDR0_D66	AV36	DQSA3
			DDR0_D67	AV5	DQSA4
			DDR0_D68	AP3	DQSA5
			DDR0_D69	AK3	DQSA6
			DDR0_D70	AF3	DQSA7
			DDR0_D71	AV32	DQSA8
			DDR0_D72	AE38	DQSA0
			DDR0_D73	AJ38	DQSA1
			DDR0_D74	AN38	DQSA2
			DDR0_D75	AJ36	DQSA3
			DDR0_D76	AW5	DQSA4
			DDR0_D77	AP2	DQSA5
			DDR0_D78	AK2	DQSA6
			DDR0_D79	AF2	DQSA7
			DDR0_D80	AU32	DQSA8

HASWELL[10SC1-F01150-11R_10SC1-F01150-12R]


MAAB0	AL19	DDR1_MA0	AE34	MDB0
MAAB1	AK23	DDR1_MA1	AE35	MDB1
MAAB2	AM22	DDR1_MA2	AG35	MDB2
MAAB3	AM23	DDR1_MA3	AH35	MDB3
MAAB4	AP23	DDR1_MA4	AD34	MDB4
MAAB5	AL23	DDR1_MA5	AD35	MDB5
MAAB6	AY24	DDR1_MA6	AG34	MDB6
MAAB7	AV25	DDR1_MA7	AH34	MDB7
MAAB8	AU26	DDR1_MA8	AL34	MDB8
MAAB9	AW25	DDR1_MA9	AL35	MDB9
MAAB10	AP18	DDR1_MA10	AK31	MDB10
MAAB11	AY28	DDR1_MA11	AL31	MDB11
MAAB12	AV28	DDR1_MA12	AK34	MDB12
MAAB13	AR15	DDR1_MA13	AK35	MDB13
MAAB14	AV27	DDR1_MA14	AK32	MDB14
MAAB15	AY28	DDR1_MA15	AL32	MDB15
MODT_B0	AM17	DDR1_ODT0	AP34	MDB17
MODT_B1	AL16	DDR1_ODT1	AN31	MDB19
MODT_B2	AM16	DDR1_ODT2	AP31	MDB23
MODT_B3	AK15	DDR1_ODT3	AP35	MDB20
			AP35	MDB16
			AN32	MDB18
			AP32	MDB22
			AM29	MDB25
			AP28	MDB27
			AR29	MDB27
			AR28	MDB30
			AL23	MDB24
			AR28	MDB29
			AP29	MDB26
			AP28	MDB31
			AR12	MDB32
			AL12	MDB35
			AR13	MDB36
			AP13	MDB37
			AM13	MDB38
			AM12	MDB39
			AR9	MDB45
			AP9	MDB41
			AR6	MDB47
			AP6	MDB43
			AR10	MDB44
			AR10	MDB40
			AR7	MDB46
			AP7	MDB42
			AM9	MDB52
			AL9	MDB53
			AL6	MDB50
			AL7	MDB55
			AM10	MDB48
			AL10	MDB49
			AM6	MDB54
			AM7	MDB51
			AH6	MDB61
			AH7	MDB60
			AE6	MDB59
			AE7	MDB63
			AJ6	MDB56
			AJ7	MDB57
			AF6	MDB58
			AF7	MDB62
			AF35	DQSB0
			AL33	DQSB1
			AN28	DQSB2
			AN28	DQSB3
			AN12	DQSB4
			AP8	DQSB5
			AL8	DQSB6
			AG7	DQSB7
			AN25	DQSB8
			AE34	DQSB0
			AK33	DQSB1
			AN33	DQSB2
			AN29	DQSB3
			AN13	DQSB4
			AR8	DQSB5
			AM8	DQSB6
			AG6	DQSB7
			AN26	DQSB8

HASWELL[10SC1-F01150-11R_10SC1-F01150-12R]



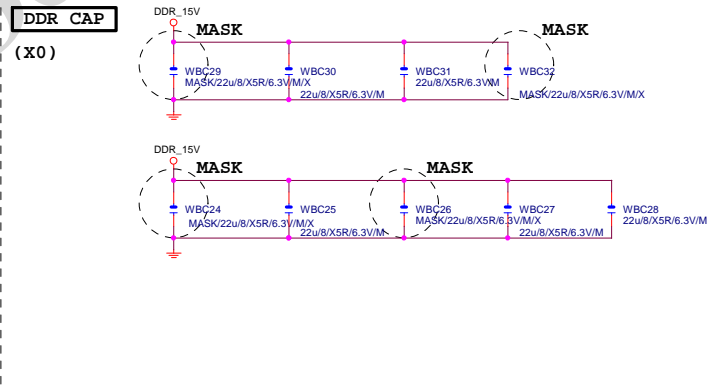


	DDR_15V	DDR_15V
100-000-9990		

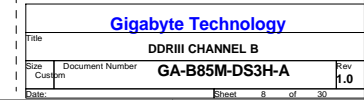


PCH

(B)

DMI:12/4/4/4/12(breakout min 8/4/4/4/8)
Impedance=85 +- 17.5%

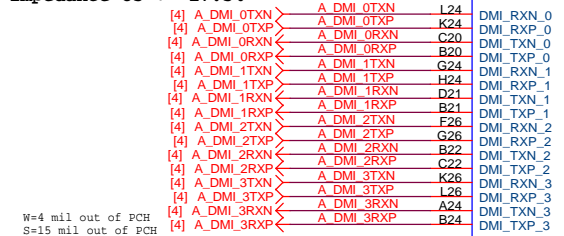

W=4 mil out of PCH
S=15 mil out of PCH



8111G


PCIEx1

放靠近 Device & PCI-E Slot
Impedance=80 +- 17.5%

PCIEX1:16/5/5/5/16 (breakout min 8/4/4/4/8)

PCH




(J)

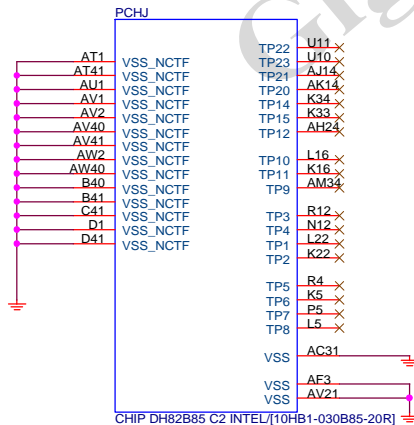

CHIP DH82B85 C2 INTEL[10HB1-030B85-20R]


USB2.0 : 12/4.5/7.5/4.5/12 (breakout min 8/4/4/4/8)
Impedance=90 +- 17.5%

PCHB B85: Port 6/7 N/A
H81: Port 6/7/12/13 N/A

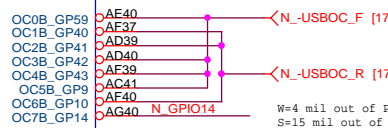

PCH


(F)

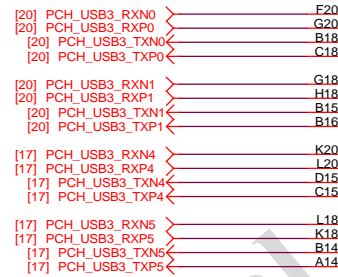


VCC3 NR62 NR63

N/A

PCH CLK PD

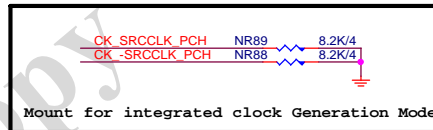


Mount for integrated clock Generation Mode



PCH H/S

LOW COST ICH7 HEATSINK

SB_HEATSINK

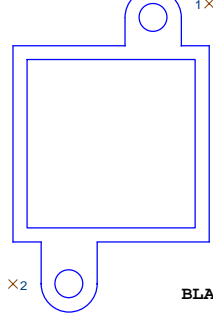

PCH_HS
PCH_HS[12SP2-030005-51R_12SP2-030005-52R_12SP2-030005-53R]

PCHF

FDILINK

N1

N2

N3

N4

N5

N6

N7

N8

N9

N10

N11

N12

N13

N14

N15

N16

N17

N18

N19

N20

N21

N22

N23

N24

N25

N26

N27

N28

N29

N30

N31

N32

N33

N34

N35

N36

N37

N38

N39

N40

N41

N42

N43

N44

N45

N46

N47

N48

N49

N50

N51

N52

N53

N54

N55

N56

N57

N58

N59

N60

N61

N62

N63

N64

N65

N66

N67

N68

N69

N70

N71

N72

N73

N74

N75

N76

N77

N78

N79

N80

N81

N82

N83

N84

N85

N86

N87

N88

N89

N90

N91

N92

N93

N94

N95

N96

N97

N98

N99

N100

N101

N102

N103

N104

N105

N106

N107

N108

N109

N110

N111

N112

N113

N114

N115

N116

N117

N118

N119

N120

N121

N122

N123

N124

N125

N126

N127

N128

N129

N130

N131

N132

N133

N134

N135

N136

N137

N138

N139

N140

N141

N142

N143

N144

N145

N146

N147

N148

N149

N150

N151

N152

N153

N154

N155

N156

N157

N158

N159

N160

N161

N162

N163

N164

N165

N166

N167

N168

N169

N170

N171

N172

N173

N174

N175

N176

N177

N178

N179

N180

N181

N182

N183

N184

N185

N186

N187

N188

N189

N190

N191

N192

N193

N194

N195

N196

N197

N198

N199

N200

N201

N202

N203

N204

N205

N206

N207

N208

N209

N210

N211

N212

N213

N214

N215

N216

N217

N218

N219

N220

N221

N222

N223

N224

N225

N226

N227

N228

N229

N230

N231

N232

N233

N234

N235

N236

N237

N238

N239

N240

N241

N242

N243

N244

N245

N246

N247

N248

N249

N250

N251

N252

N253

N254


N255

N256



N257

N258



N259






VGA DDC

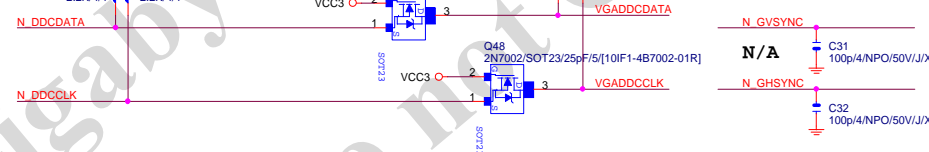

VGA DDC






Title			
PCH HOST , SATA, PCI			
Size	Document Number		Rev
Custom	GA-B85M-DS3H-A		1.0
Date:	Tuesday, December 30, 2014	Sheet	11 of 30


PCH

(D)




NRN15 33/8P4R4 PCHD

[16] N_LAD[0..3] << N_LAD[0..3]

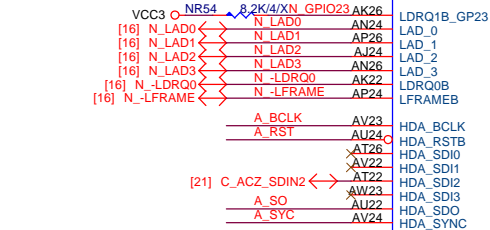
[21] C_ACZ_SDIN2<< AW23
A SO AU22
A SYNC AV24

[19] N_ICH_SPI_MOSI< P40
 [19] N_ICH_SPI_MISO< R36
 [19] N_ICH_SPI_CS< R37
 [19] N_ICH_SPI_CLK< U39

[19] SPI_DQ2< R35
 [19] SPI_DQ3< R40

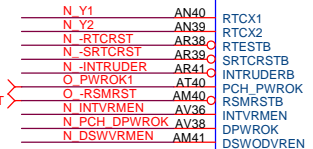


[6,11,16] O_PWROK1< AT40
 [16,24] O_RSMRST< AM40

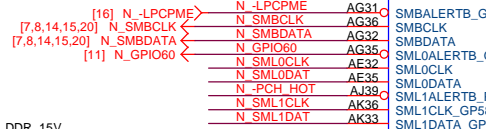

HSW_STRAP13


N/A

32.768KHZ



XTALS-RH-N


CLR_CMOS

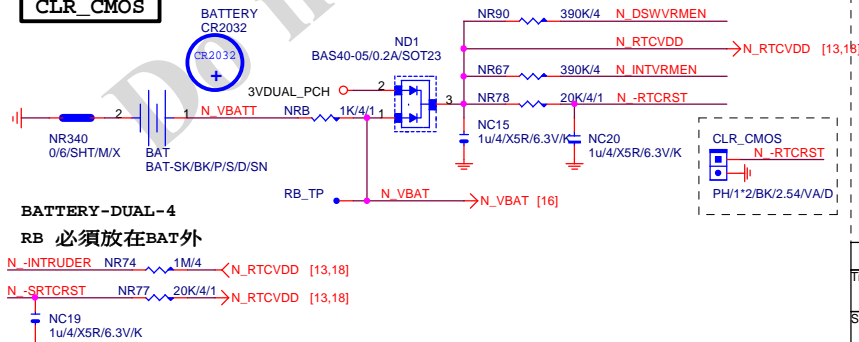


ACZ_SDOUT

N/A

PCH_DPWROK

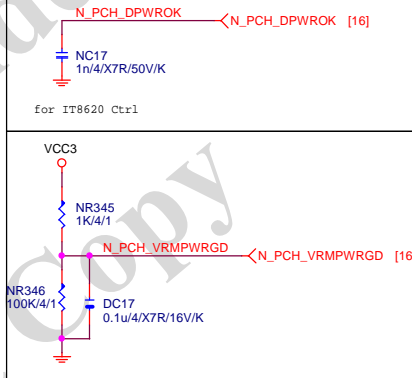

PCH PU/PD

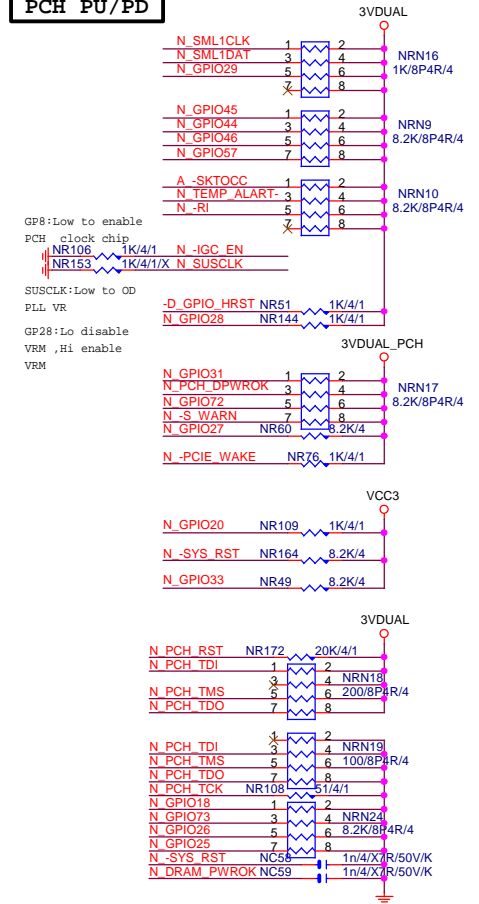

Gigabyte Technology


Title		PCH GPIO , CTRL , AUDIO	
Size	Document Number	GA-B85M-DS3H-A	
Custom			Rev 1.0
Date:	Tuesday, December 30, 2014	Sheet 12	of 30

PCH (H)




VCC3_DAC

3VDUAL_PCH

SHT_PWR

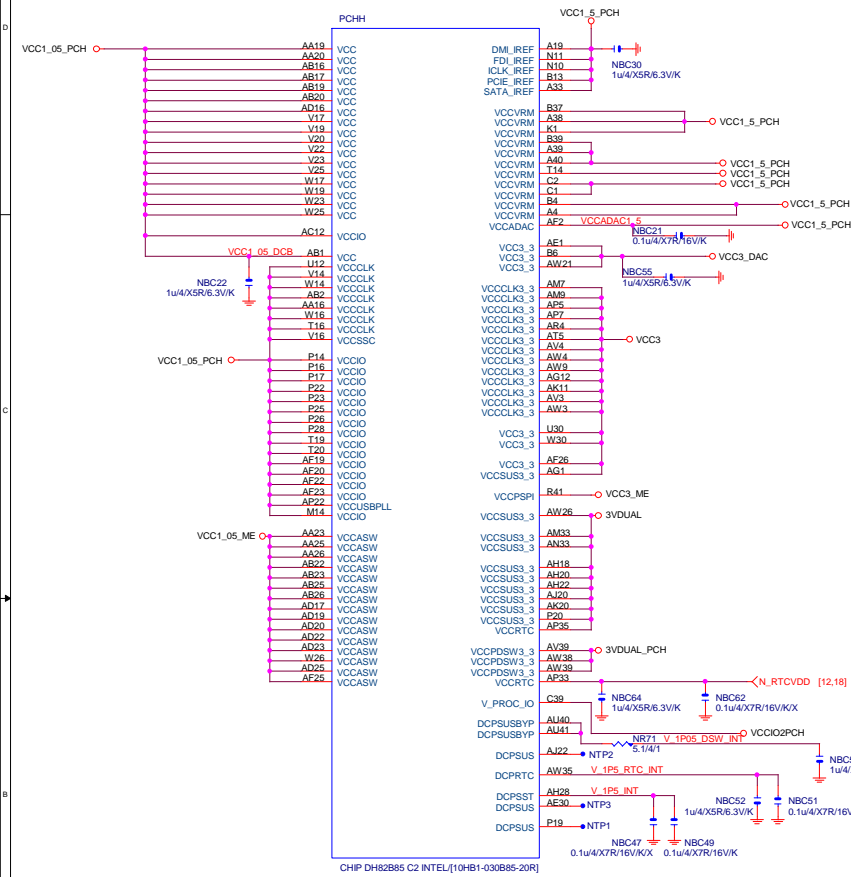


CLOSE北橋(注意震盪水波紋)

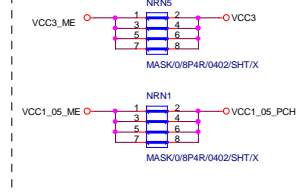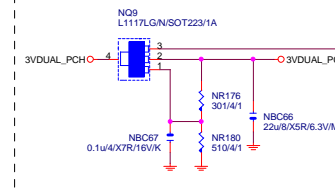



CAP


(3.3V)(X3)

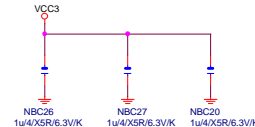

(1.05V)(X2)(3.3V)(X2)



(1.5V)(X5)

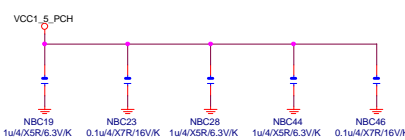


PCH (I)




PCIEX16 CAP

N/A

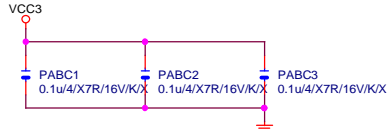

PCIEX16 PROTECT SHT



PCIEX16 AC CAP


PA EXP TXP0	PAC5	0.22u4/X5R/6.3V/K	PA EXP TXP0 C
PA EXP TXN0	PAC4	0.22u4/X5R/6.3V/K	PA EXP TXN0 C
PA EXP TXP1	PAC6	0.22u4/X5R/6.3V/K	PA EXP TXP1 C
PA EXP TXN1	PAC7	0.22u4/X5R/6.3V/K	PA EXP TXN1 C
PA EXP TXP2	PAC8	0.22u4/X5R/6.3V/K	PA EXP TXP2 C
PA EXP TXN2	PAC9	0.22u4/X5R/6.3V/K	PA EXP TXN2 C
PA EXP TXP3	PAC10	0.22u4/X5R/6.3V/K	PA EXP TXP3 C
PA EXP TXN3	PAC11	0.22u4/X5R/6.3V/K	PA EXP TXN3 C
PA EXP TXP4	PAC12	0.22u4/X5R/6.3V/K	PA EXP TXP4 C
PA EXP TXN4	PAC13	0.22u4/X5R/6.3V/K	PA EXP TXN4 C
PA EXP TXP5	PAC14	0.22u4/X5R/6.3V/K	PA EXP TXP5 C
PA EXP TXN5	PAC15	0.22u4/X5R/6.3V/K	PA EXP TXN5 C
PA EXP TXP6	PAC16	0.22u4/X5R/6.3V/K	PA EXP TXP6 C
PA EXP TXN6	PAC17	0.22u4/X5R/6.3V/K	PA EXP TXN6 C
PA EXP TXP7	PAC19	0.22u4/X5R/6.3V/K	PA EXP TXP7 C
PA EXP TXN7	PAC18	0.22u4/X5R/6.3V/K	PA EXP TXN7 C
PA EXP TXP8	PAC20	0.22u4/X5R/6.3V/K	PA EXP TXP8 C
PA EXP TXN8	PAC21	0.22u4/X5R/6.3V/K	PA EXP TXN8 C
PA EXP TXP9	PAC22	0.22u4/X5R/6.3V/K	PA EXP TXP9 C
PA EXP TXN9	PAC23	0.22u4/X5R/6.3V/K	PA EXP TXN9 C
PA EXP TXP10	PAC24	0.22u4/X5R/6.3V/K	PA EXP TXP10 C
PA EXP TXN10	PAC25	0.22u4/X5R/6.3V/K	PA EXP TXN10 C
PA EXP TXP11	PAC26	0.22u4/X5R/6.3V/K	PA EXP TXP11 C
PA EXP TXN11	PAC27	0.22u4/X5R/6.3V/K	PA EXP TXN11 C
PA EXP TXP12	PAC28	0.22u4/X5R/6.3V/K	PA EXP TXP12 C
PA EXP TXN12	PAC29	0.22u4/X5R/6.3V/K	PA EXP TXN12 C
PA EXP TXP13	PAC30	0.22u4/X5R/6.3V/K	PA EXP TXP13 C
PA EXP TXN13	PAC31	0.22u4/X5R/6.3V/K	PA EXP TXN13 C
PA EXP TXP14	PAC32	0.22u4/X5R/6.3V/K	PA EXP TXP14 C
PA EXP TXN14	PAC33	0.22u4/X5R/6.3V/K	PA EXP TXN14 C
PA EXP TXP15	PAC34	0.22u4/X5R/6.3V/K	PA EXP TXP15 C
PA EXP TXN15	PAC35	0.22u4/X5R/6.3V/K	PA EXP TXN15 C

PA EXP RXP0 [15] >>> PA_EXP_RXP[0..15] [4]
PA EXP RXN0 [15] >>> PA_EXP_RXN[0..15] [4]
PA EXP TXP0 [15] >>> PA_EXP_TXP[0..15] [4]
PA EXP TXN0 [15] >>> PA_EXP_TXN[0..15] [4]

PCIEX16 SLOT

www.xinxunwei.com 400-800-9990

PCIESLOT-164DN-Q-1

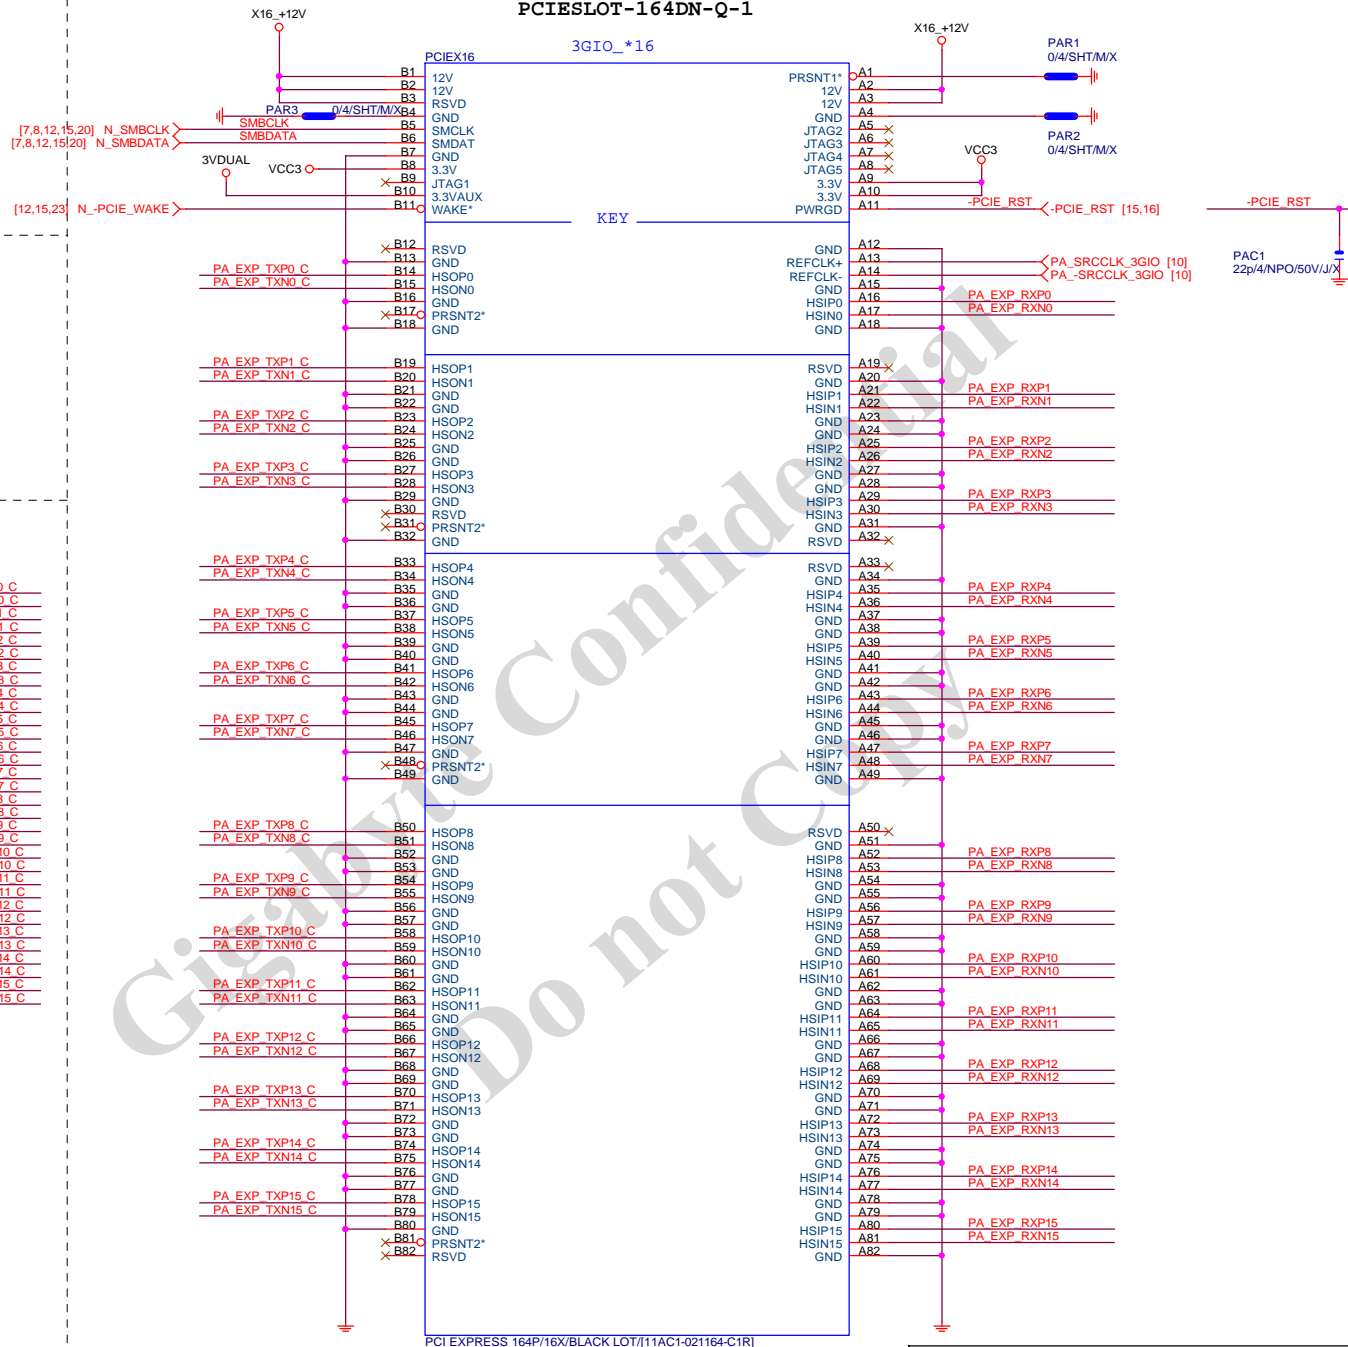



PCI EXPRESS 164P/16X/BLACK LOT/[11AC1-021164-C1R]

BLACK CONNECTOR


Gigabyte Technology

Title			
PCI EXPRESS * 16			
Size	Document Number	Rev	
Custom	GA-B85M-DS3H-A	1.0	
Date:	Tuesday, December 30, 2014	Sheet	14 of 30

PCIEX1 SLOT











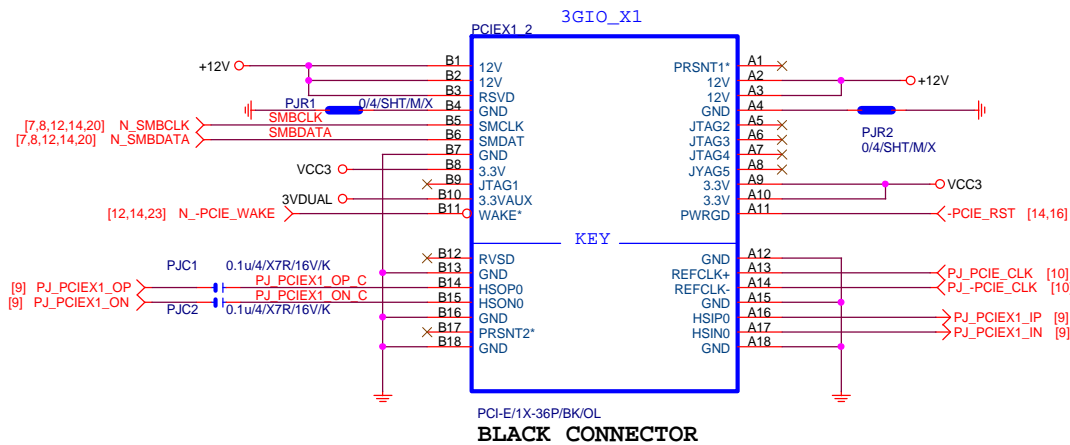
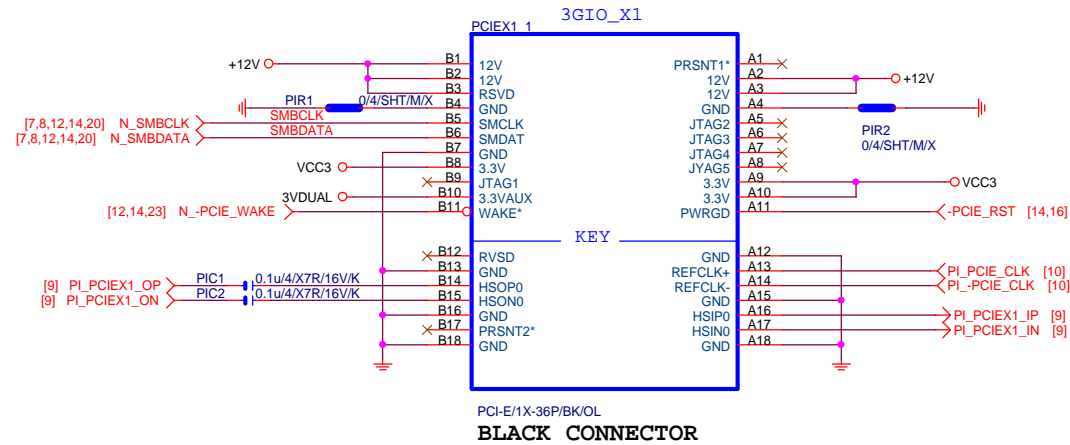















N/A

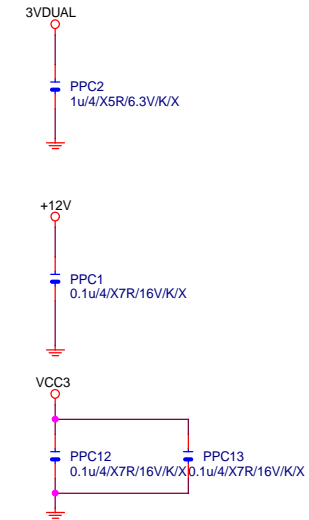


Gigabyte Technology

Title			PCI EXPRESS X 1 PORT
Size	Document Number	Rev	
Custom		GA-B85M-DS3H-A	
Date:	Tuesday, December 30, 2014	Sheet	15 of 30

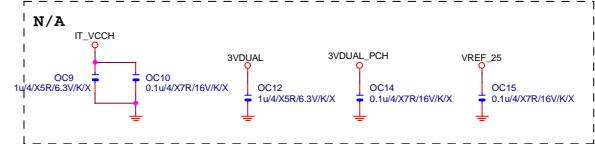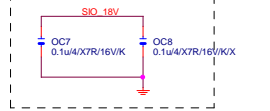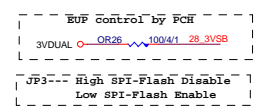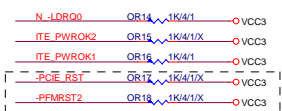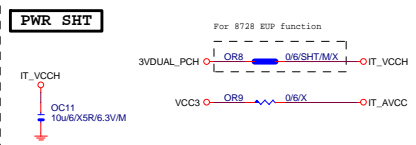


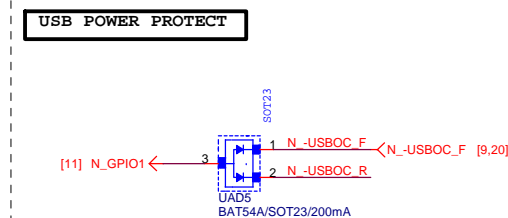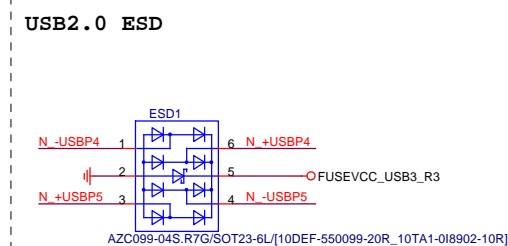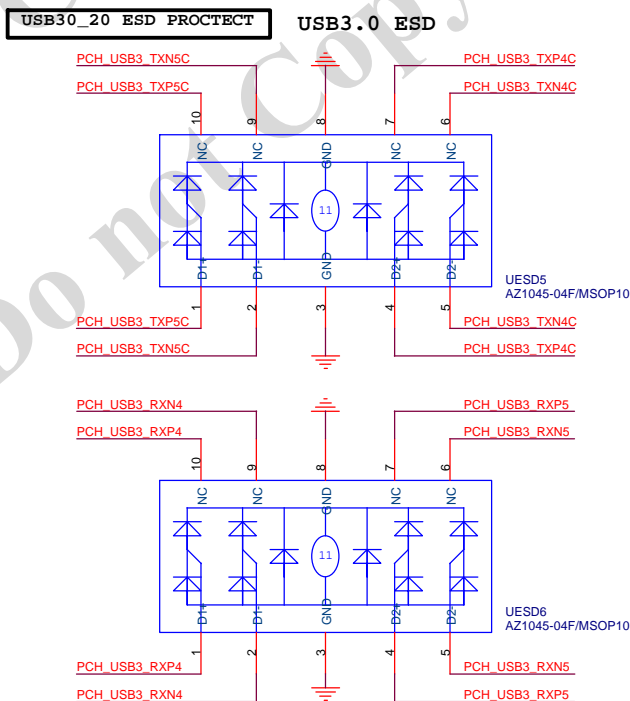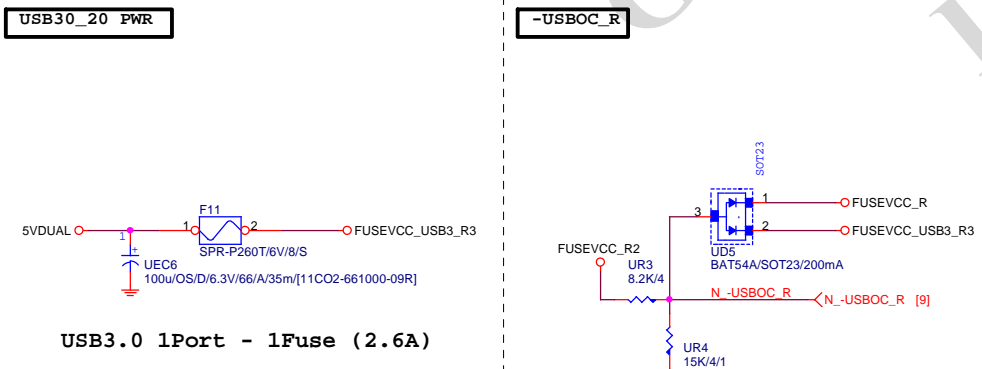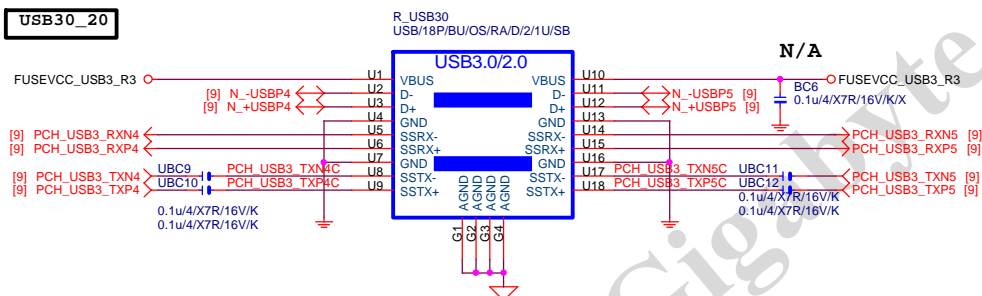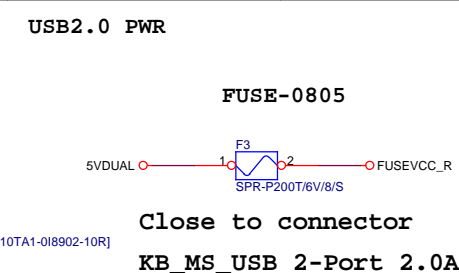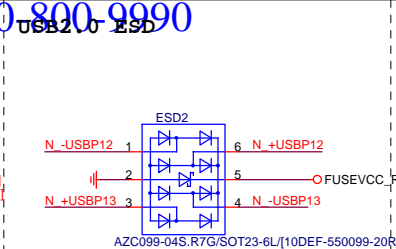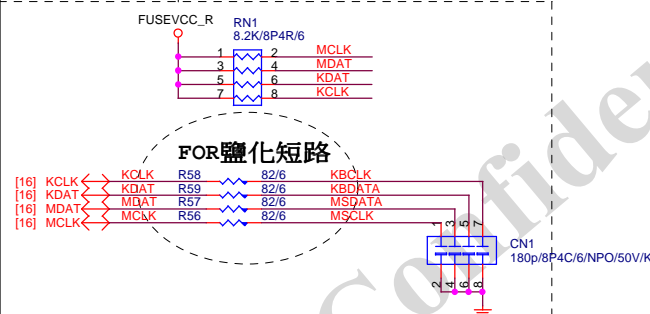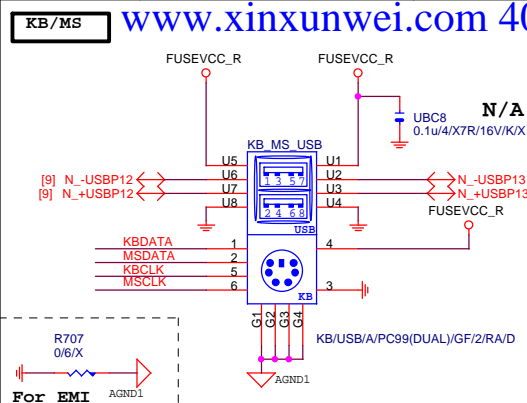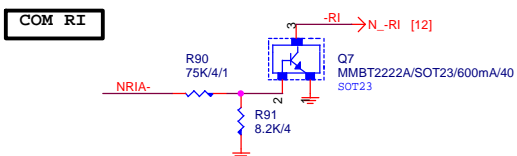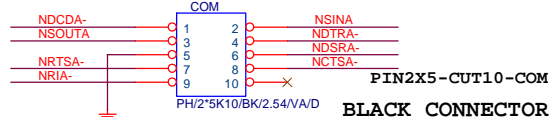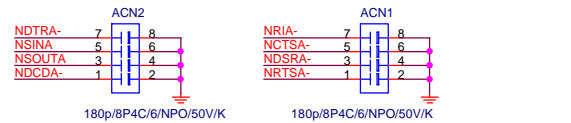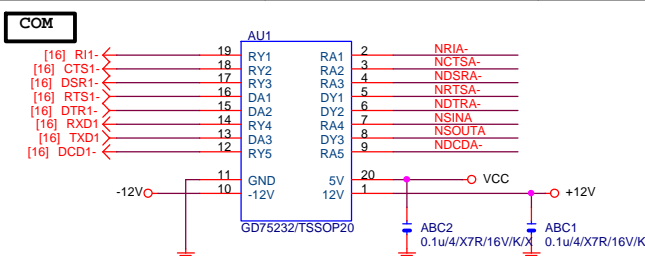


TEMP H/W MONITOR

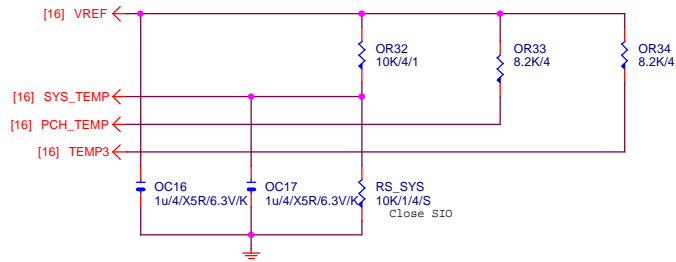


CPU SMART FAN

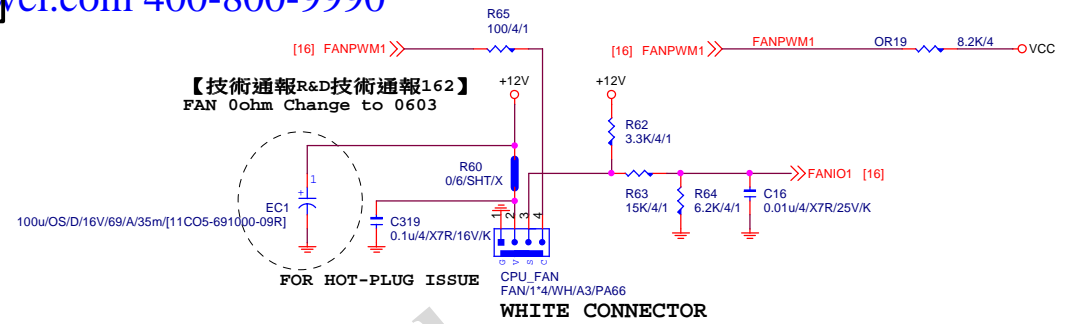



CASE OPEN

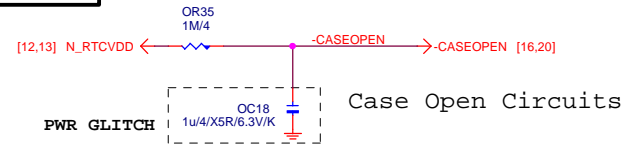

SYS SMART FAN

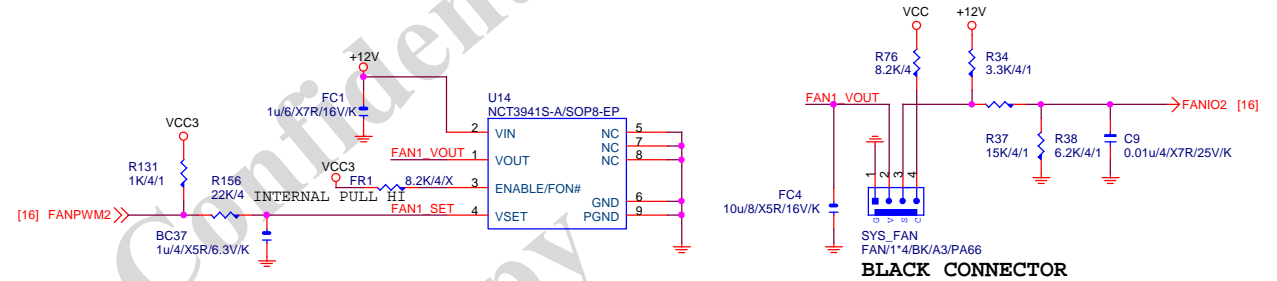


VOLTAGE-- H/W MONITOR

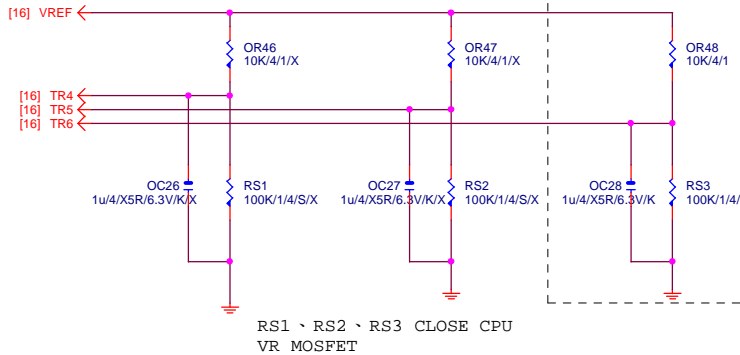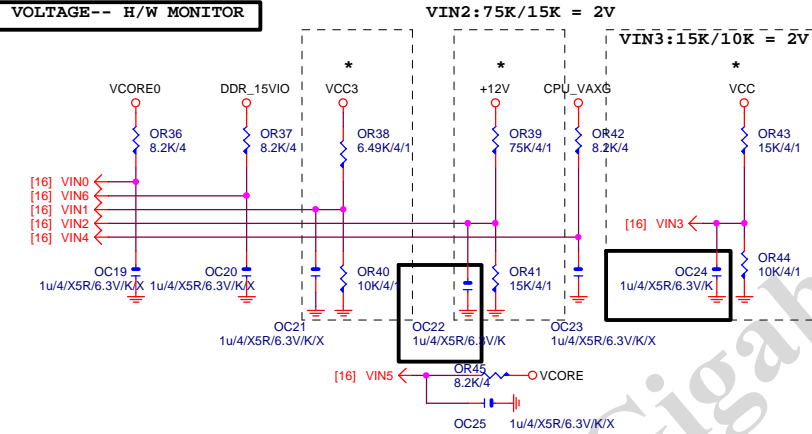


Gigabyte Technology

Title			HWM,FAN CTRL,OV		
Size	Document Number	GA-B85M-DS3H-A			Rev
Custom					1.0
Date:	Tuesday, December 30, 2014	Sheet	18	of	30

M_BIOS
32M/SPI/SO8/200mil/S/[10HP4-112532-20R]

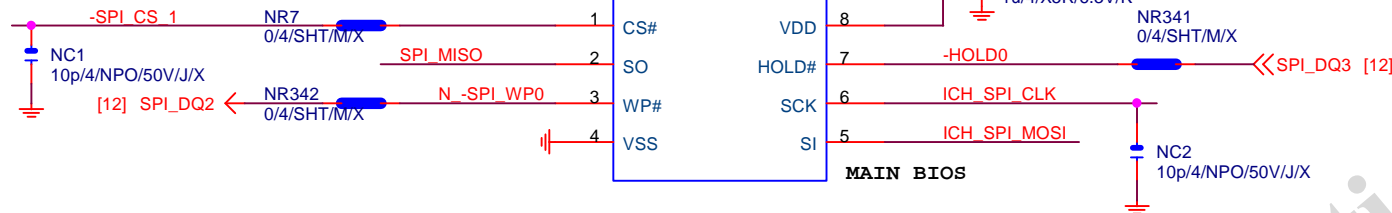




B_BIOS
32M/SPI/SO8/200mil/S/[10HP4-112532-20R]

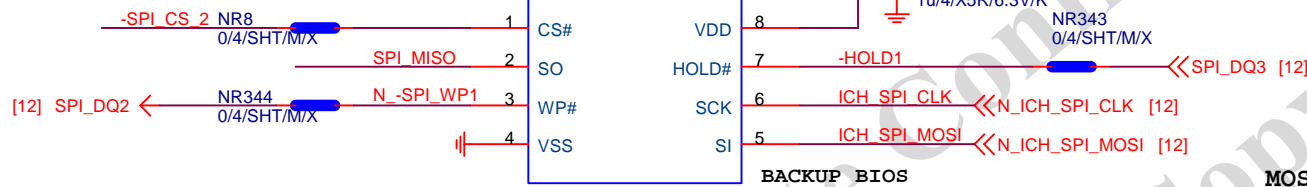

BOOT DEVICE	GNT0	GNT1
LPC	0	0
PCI	0	1
NAND	1	0
SPI	1	1

1 means floating
0 means PD 1K

MOSI For DMI RX Termination Voltage

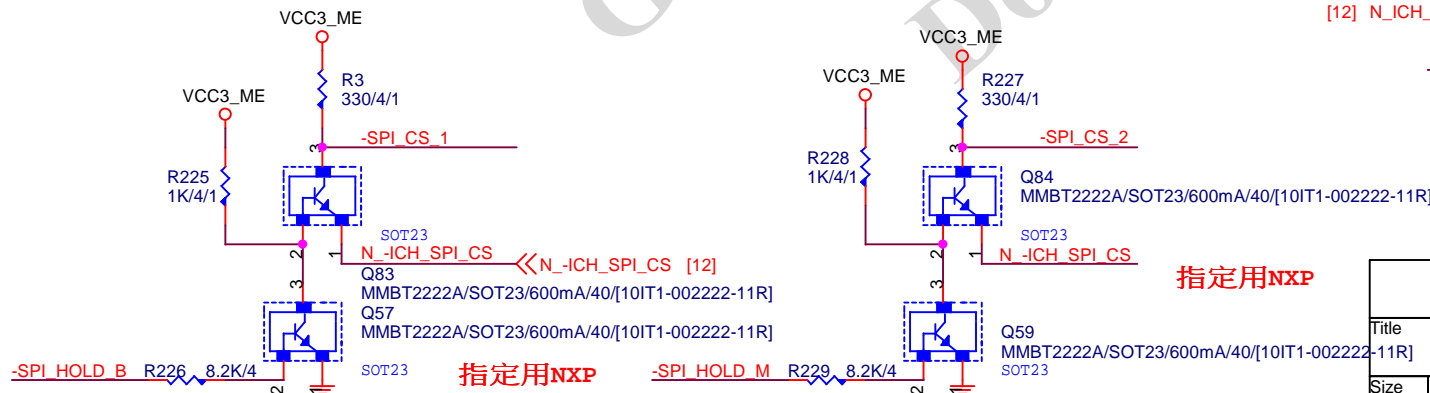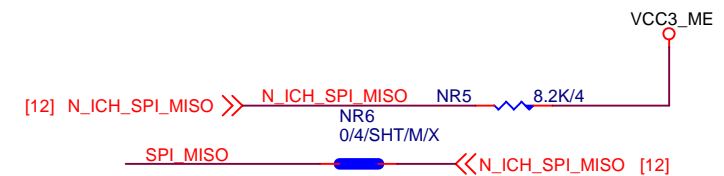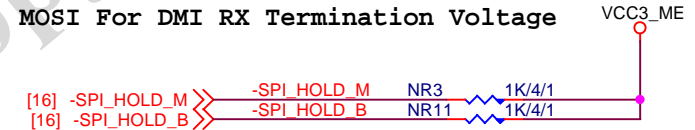

指定用NXP

Gigabyte Technology

DUAL BIOS

GA-B85M-DS3H-A

Rev
1.0


Title

Size
Custom




Document Number

Date: Tuesday, December 30, 2014




Sheet 19 of 30

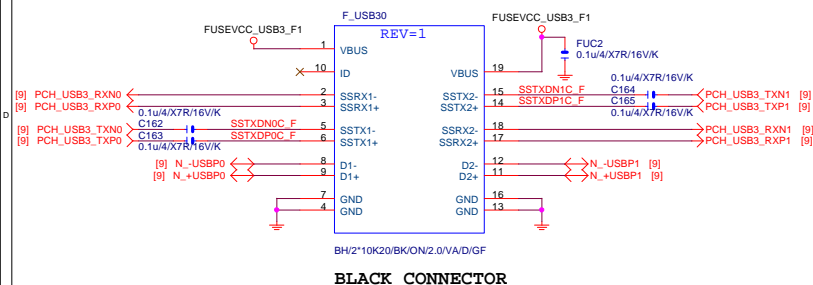F_USB30

USB3.0 1Port - 1Fuse (3.5A)

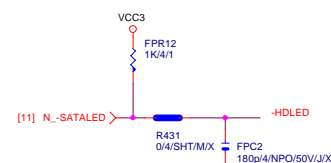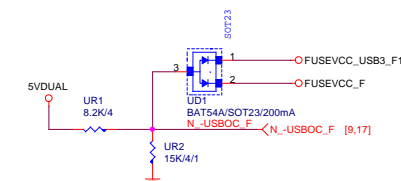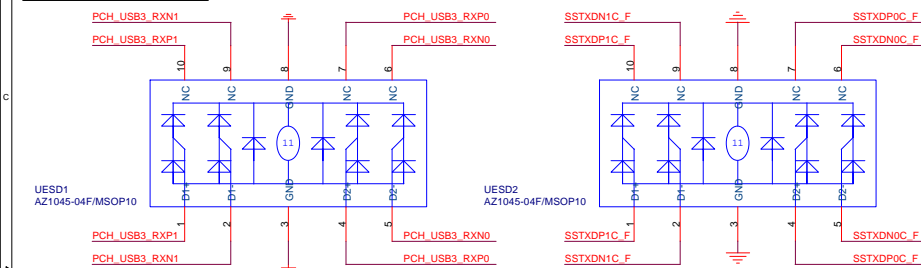SATA_LED**-USBOC_F****F_USB30 ESD PROTECT**



Close to connector

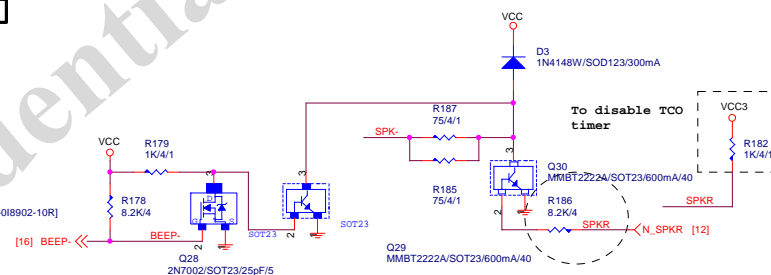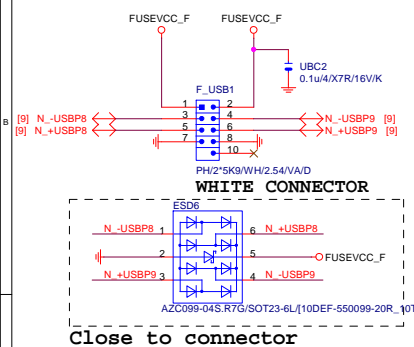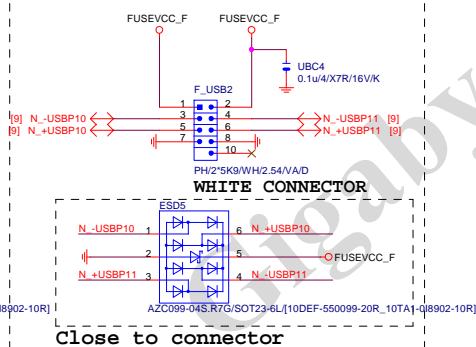SPKR**FRONT USB1****FRONT USB2**

Close to connector

Close to connector

FUSE-0805
F_USB1, F_USB2 4-Port 2.0A

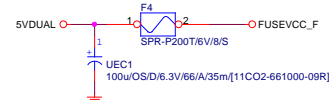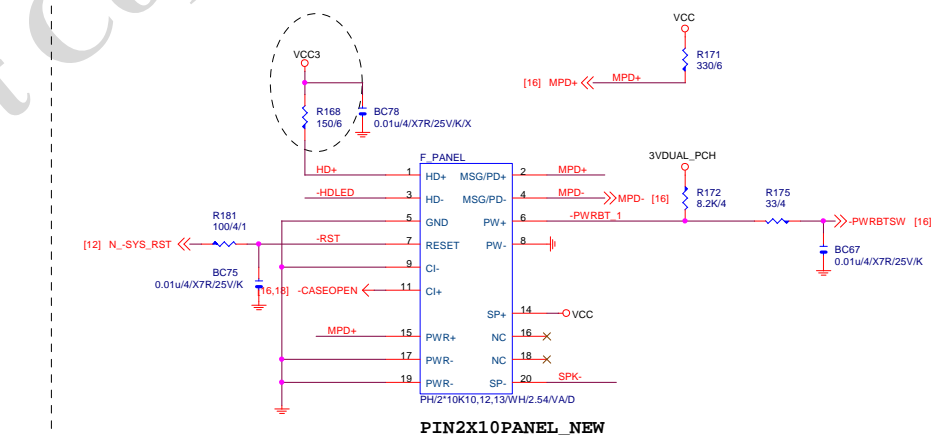
**INTEL FRONT PANEL**

Gigabyte Technology

FP,F_USB,USB PWR,SPKR,SATA LED		
Size	Document Number	Rev
Custom	GA-B85M-DS3H-A	1.0
Date:	Tuesday, December 30, 2014	Sheet 20 of 30

AZALIA CODEC ALC892/ALC887-VD2/VT1708-CE Colay



	ALC892	ALC887-VD2	VT1708S-CE
CR44/CBC26	47ohm+1nF	47ohm+1nF	22ohm+100P
CBC42/CBC43	X	X	100P/4
CR6/CR7/CR58/CR54/ CR67/CR68/CR69/CR70	22K/4	22K/4	10K/4/1
CR5/CR8/CR1/CR14/ CR17/CR22/CR73/CR74/ CR13/CR11/CR57/CR53/ CR75/CR76	62 ohm	62 ohm	75 ohm
CR51/CD1/CBC7	O	O	O
CESD1	O	O	O

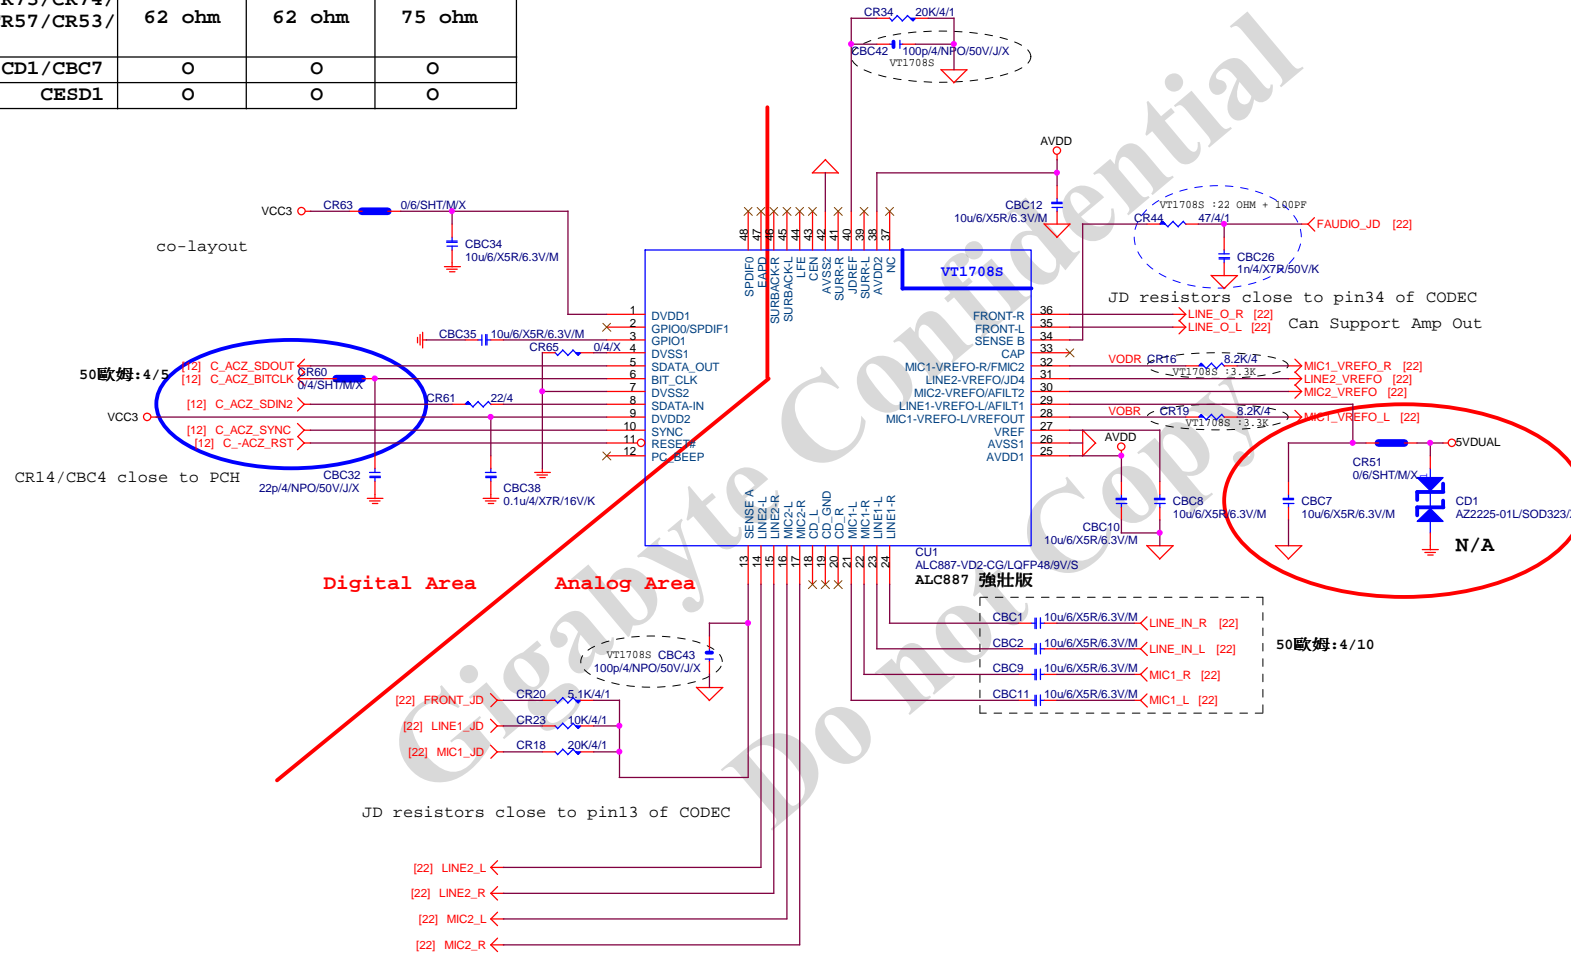

Gigabyte Technology

Title		
HD AUDIO ALC887B-VD2/VT1708S/VT2021		
Size	Document Number	Rev
Custom	GA-B85M-DS3H-A	1.0
Date:	Tuesday, December 30, 2014	Sheet 21 of 30


CONFIDENTIAL

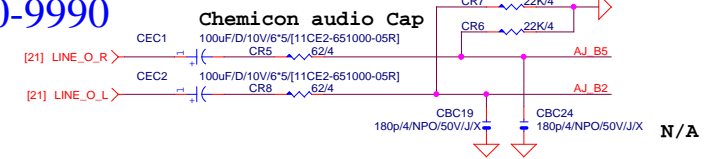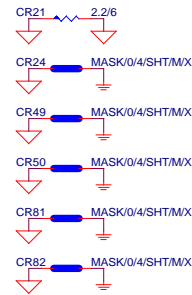

LINE-IN


Verify MIC function
in LINE-in

Only reserved for ALC888

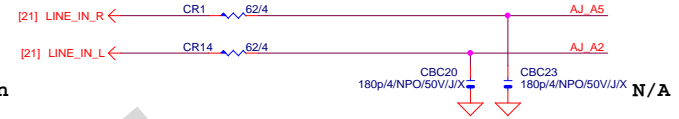


For 889A/888


MIC-IN

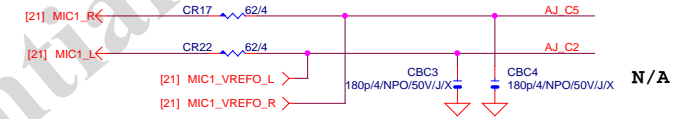

SPDIF_OUT

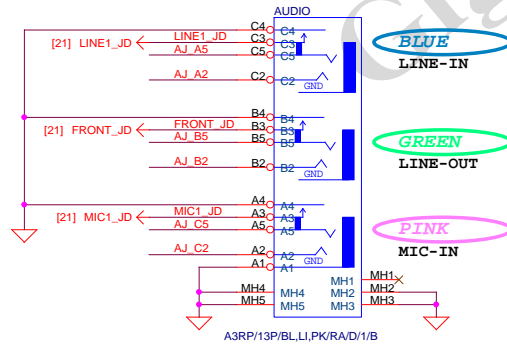

AZALIA FRONT PANEL

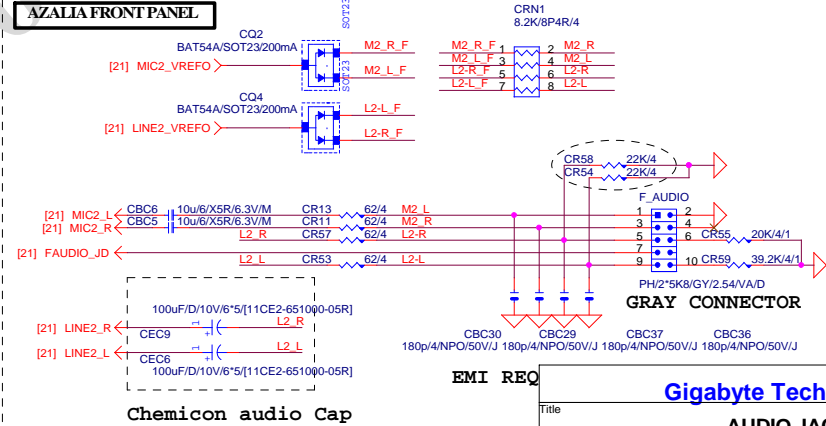

EMI REQ

Gigabyte Technology


AUDIO JACK

GA-B85M-DS3H-A

Rev 1.0

Date: Tuesday, December 30, 2014 Sheet 22 of 30


LAN RTL8111G-CG

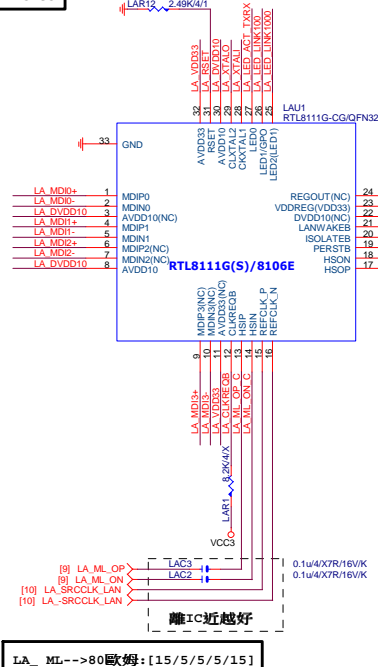




SRCCLK-->50歐姆:[18/4/10/4/18]

LA_ML-->80歐姆:[15/5/5/15]

MDI ESD預留28KV *

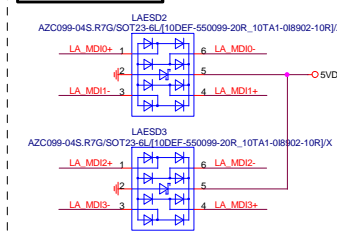

LAN POWER

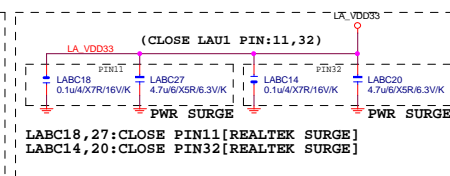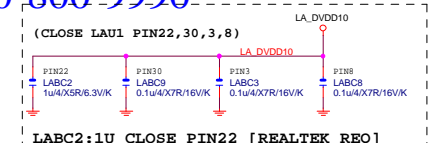


NOTE:
RT8106E: PIN3, 11, 22, 24-->NC
LABC2LABC3, LABC5, LABC18, LABC27-->N/A

BOM NOTICE *

料號 規格 廠商
11NR6-702009-96R 1G LAN (12core) UDE(RU9 ESD+)
[LED獨立走線, 可省略外加AZC099料件LAESD1]


1. 9KV ESD BOM:
USB_LAN (RU9): 11NR6-702009-96R
2. 28KV ESD BOM:
USB_LAN (RU9): 11NR6-702009-96R
LAESD2, LAESD3: 上件AZC398-04S

USB_LAN CONNECTOR

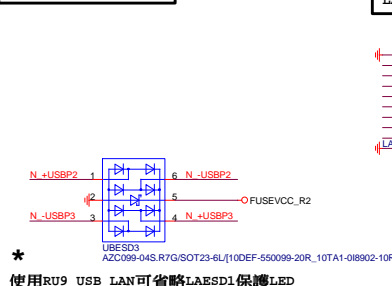


*
AZC099-04S.R7G/SOT23-6L[110DEF-550099-20R_10TA1-08902-10R]
使用RU9 USB_LAN可省略LAESD1保護LED

LA_MDI-->100歐姆:[20/4/8/4/20]

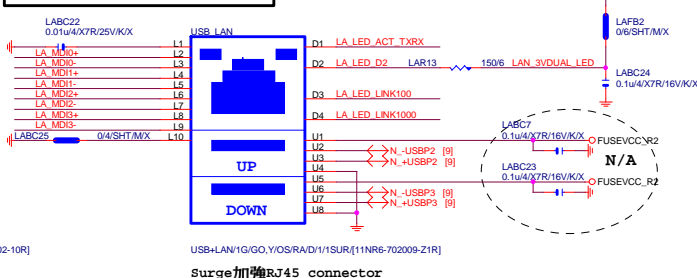


USB+LAN1G/GO.Y/OS/RA/D/1/1SUR[11NR6-702009-21R]
Surge加強RJ45 connector


USB X3 POWER

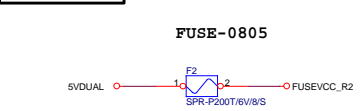

EMI SHORT PAD



PS: 視EMI需求

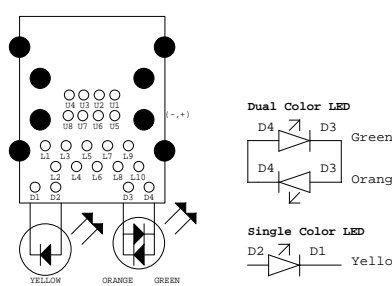

注意: USB PORT (目前: 暫代6, 7PORT)
USB-->90歐姆:[15/4.5/7.5/4.5/15]


BOM NOTICE *

料號 規格 廠商
11NR6-702009-96R 1G LAN (12core) UDE(RU9 ESD+)
[LED獨立走線, 可省略外加AZC099料件LAESD1]

1. 9KV ESD BOM:
USB_LAN (RU9): 11NR6-702009-96R
2. 28KV ESD BOM:
USB_LAN (RU9): 11NR6-702009-96R
LAESD2, LAESD3: 上件AZC398-04S

Gigabyte Technology			
Title			
Realtek RTL8111G			
Size	Document Number	GA-B85M-DS3H-A	Rev 1.0
Custom			
Date:	Tuesday, December 30, 2014	Sheet	23 of 30


VCC1_5_PCH

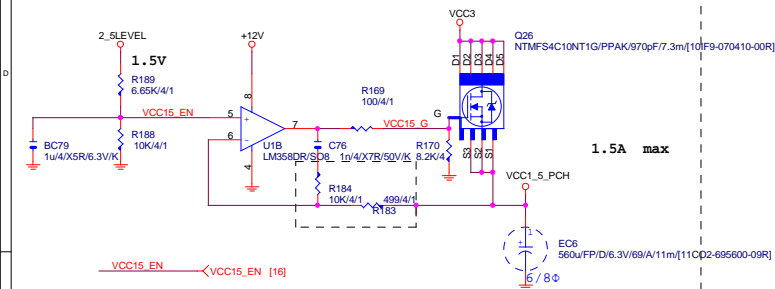


2_5LEVEL




3VDUAL

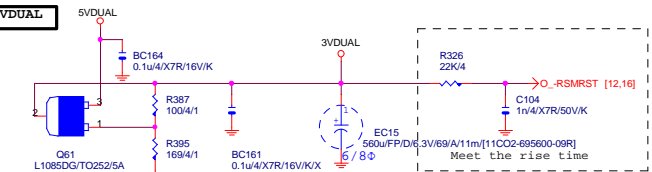


VCC1_05_PCH

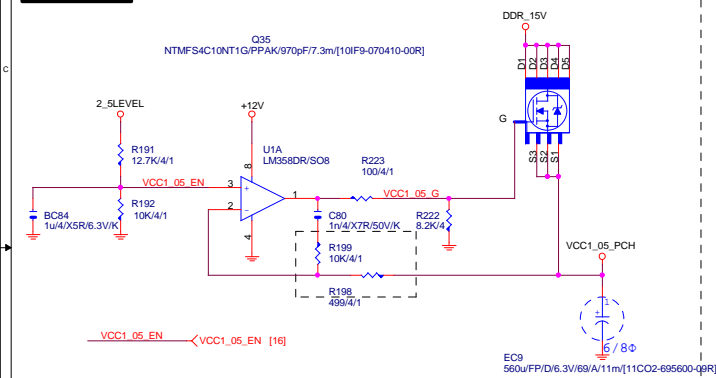


N/A

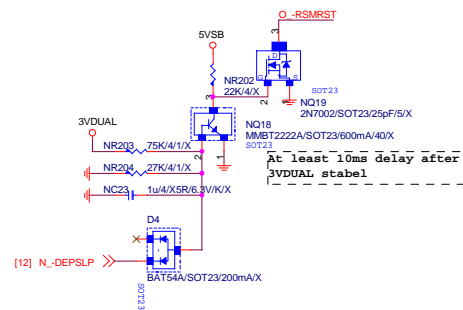

DDRVT

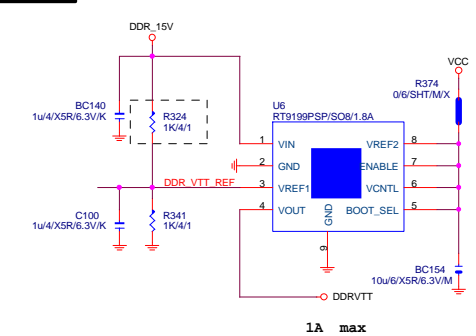


5VDUAL

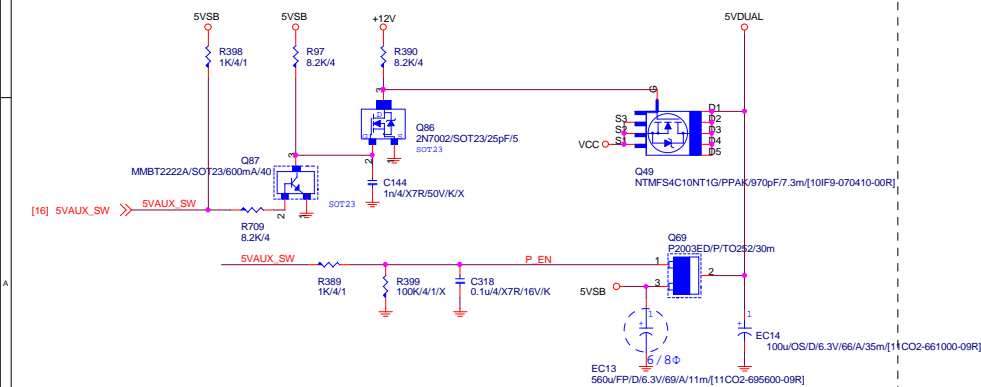

ATXX24 POWER CONNECTOR

【技術通報R&D技術通報155】

ATXPWR_24-6

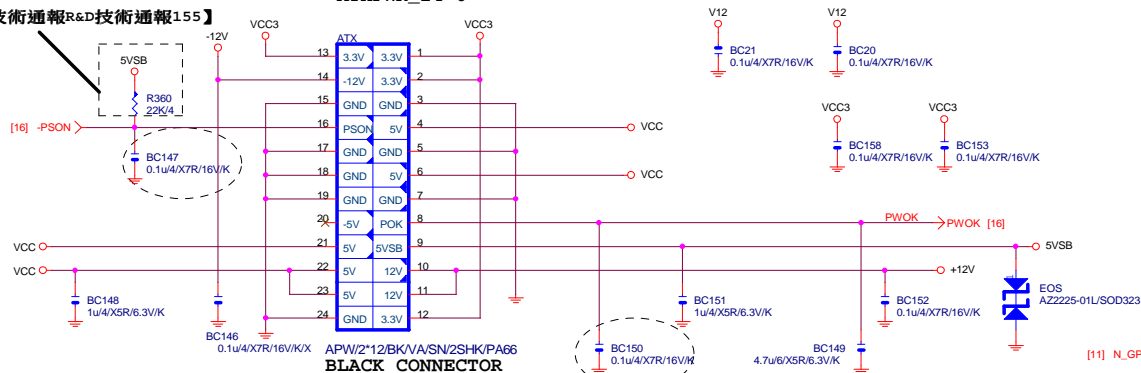


APW/2*12BK/VA/SN/2SHK/PA66
BLACK CONNECTOR

www.xinxunwei.com 400-800-9990


ATXX4 POWER CONNECTOR

【技術通報R&D技術通報155】

To fix 12V light load abnormal issue

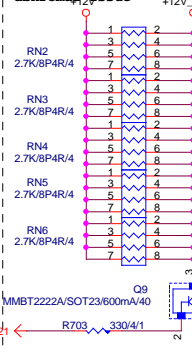


ATXPW2X4-6



BLACK CONNECTOR


ATX_12V_2X4
APW/2*4BK/OC/P/4.2VA/SN/OH

TPM

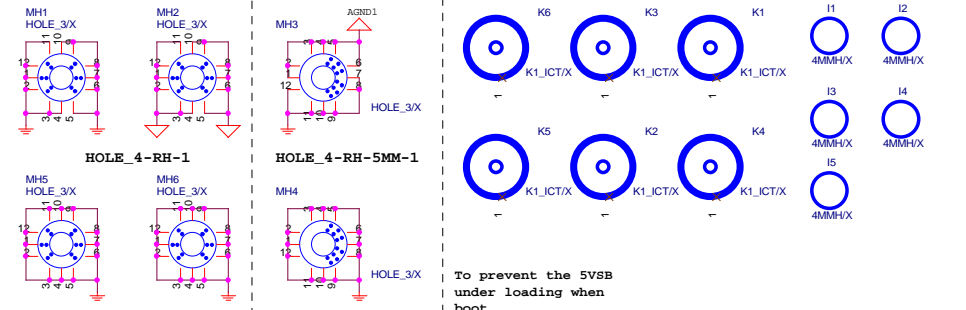

FIX PWR MINMUN LOAD

N/A

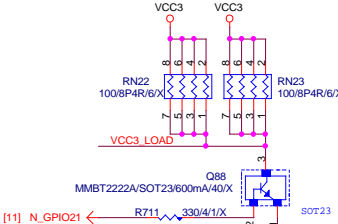

PWOK PATCH

【技術通報R&D技術通報154】


Gigabyte Technology

ATX CONNECTOR

GA-B85M-DS3H-A

Rev 1.0



Date: Tuesday, December 30, 2014 Sheet 25 of 30

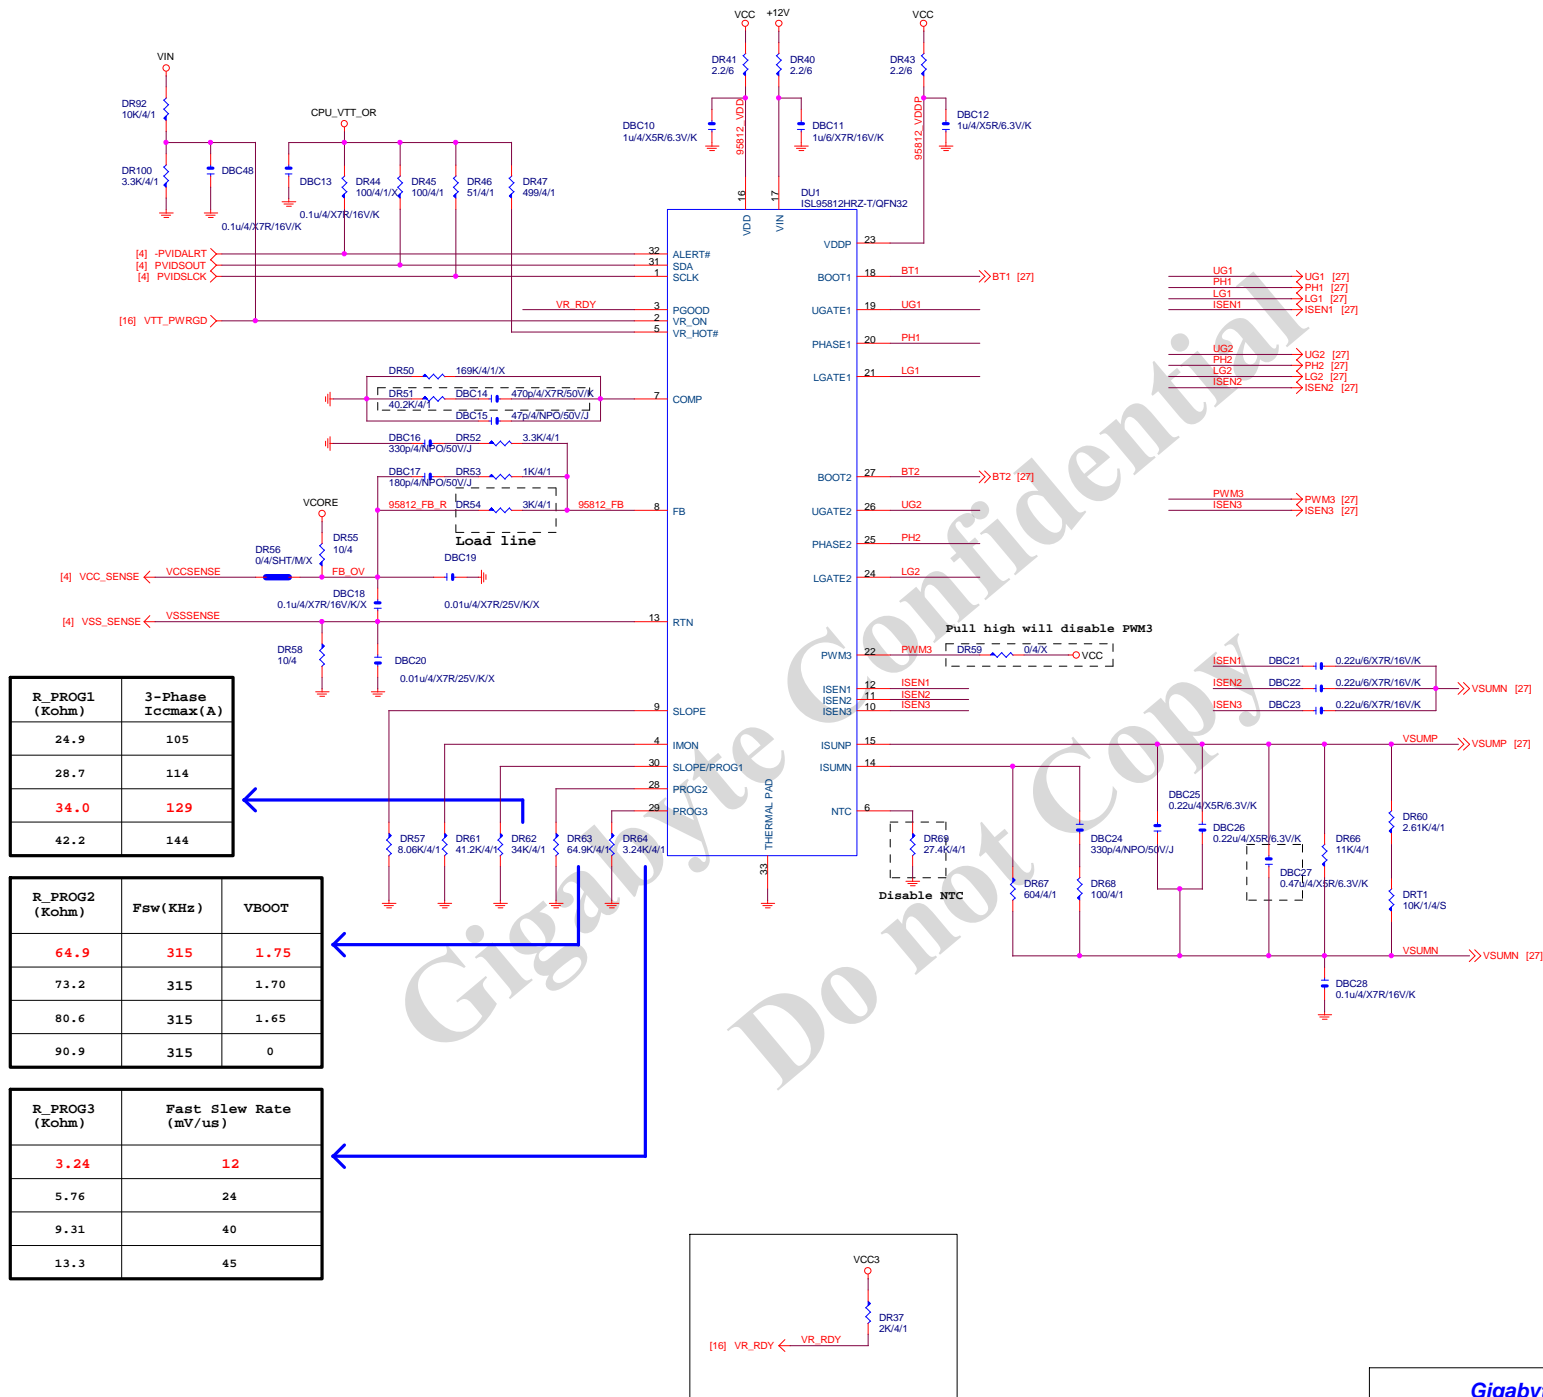




Gigabyte Technology

File			CPU CORE VR-1
Size	Document Number	GA-B85M-DS3H-A	
Custom		Rev	1.0
Date	Tuesday, December 30, 2014	Sheet	26 of 30





PHASE 1

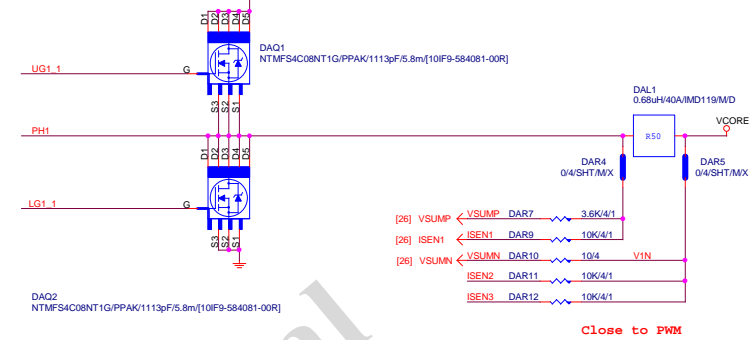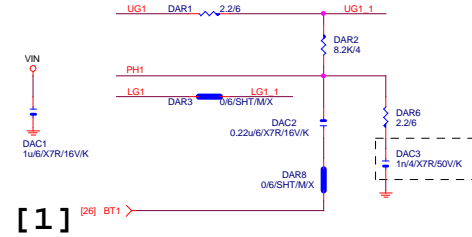

PHASE 3

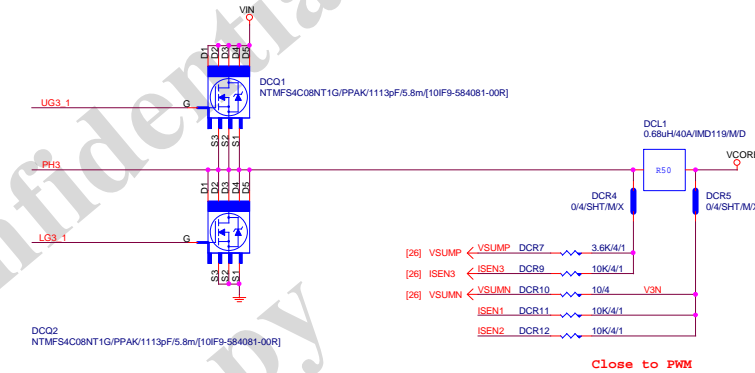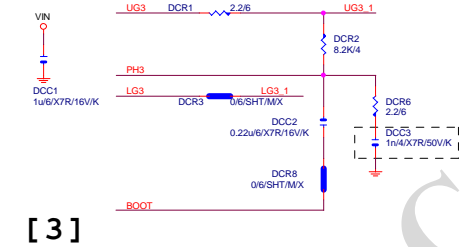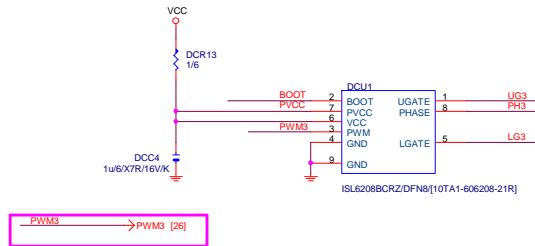


PHASE 2

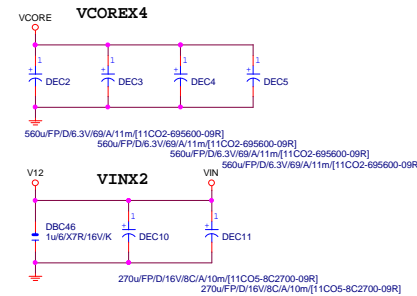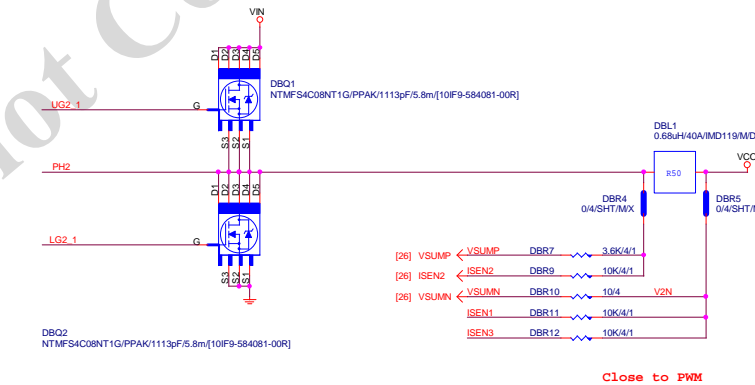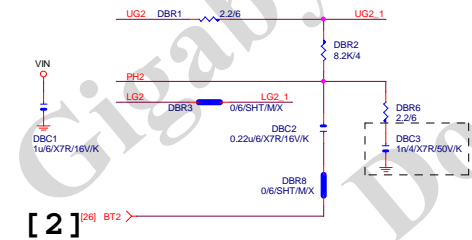

Gigabyte Technology

Title		CPU CORE VR-2	
Size	Document Number	GA-B85M-DS3H-A	
Custom			Rev 1.0
Date	Tuesday, December 30, 2014	Sheet	27 of 30

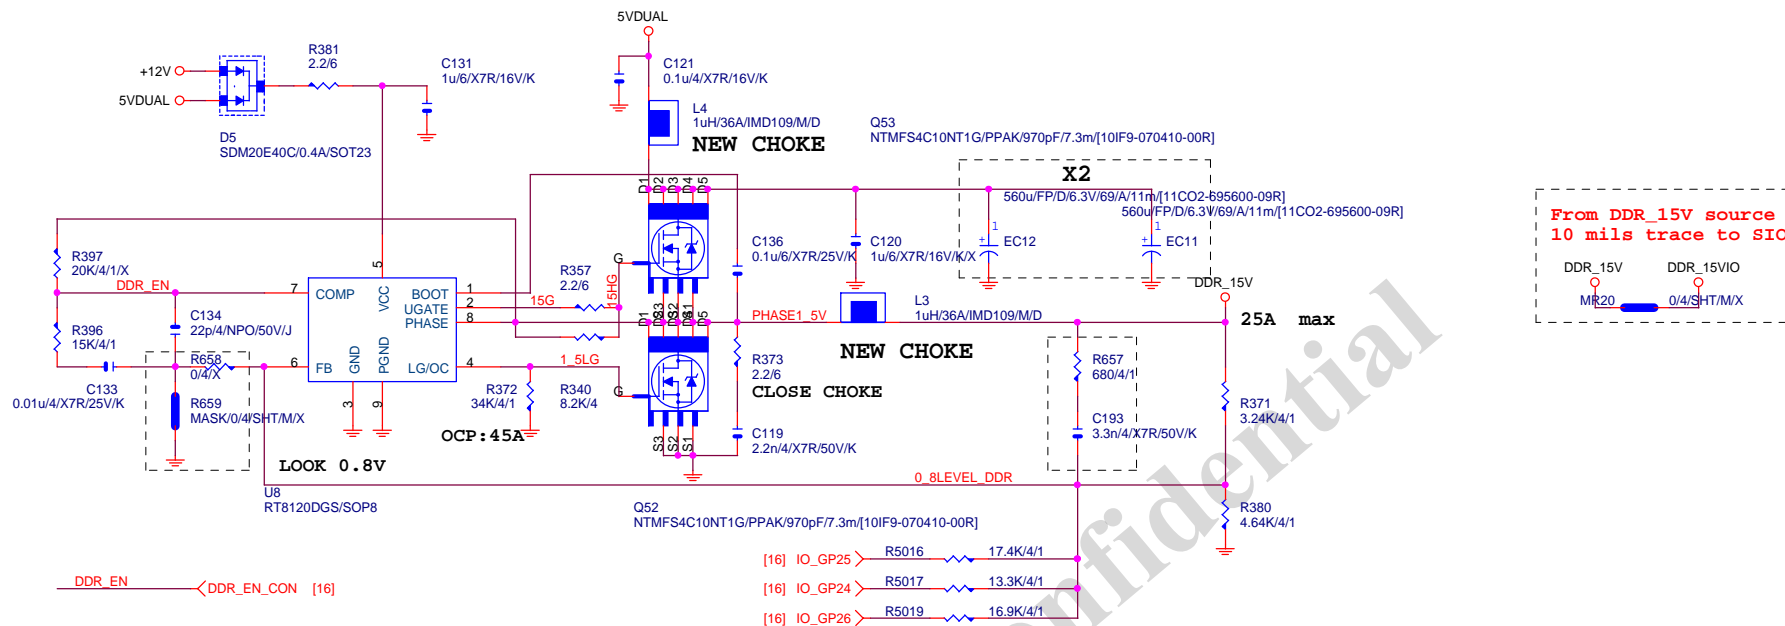

PWR SEQ

GP26	H	L	L	L
GP25	H	H	L	H
GP24	H	H	H	L
	1.35V	1.50V	1.65V	1.70V

VIN=5V,VOUT=1.5V,IOUT=25A,PHASE=1

IRMS=11.45A

560u/FP/D/6.3V/68/8m RIPPLE CURRENT=4.7A

Coefficient=1.7(85°C), 1(105°C)

VIN Ripple current=4.7X1.7=7.99A(85°C)

-->故固態電容須 $2 \times 7.99 = 15.98 > 11.45A$

$$\text{Rocset} = (\text{Iocp} * \text{Lgate}, \text{rdson}) / \text{Iocset}$$

$$R_{ocset} = (45A * 6.7m\Omega) / 10\mu A = 30K$$

Iocset=10uA

Gigabyte Technology

DDR POWER

Size	Document Number	GA-B85M-DS3H-A
Custom		

Rev	
1.0	


Date: Tuesday, December 30, 2014 Sheet 28 of 30

VCC1_05_ME

【技術通報R&D技術通報156】

(RICHTER), (NUVOTON), (EMC)做共用
PIN7分壓阻值須做修改為100K以上電阻值

N/A

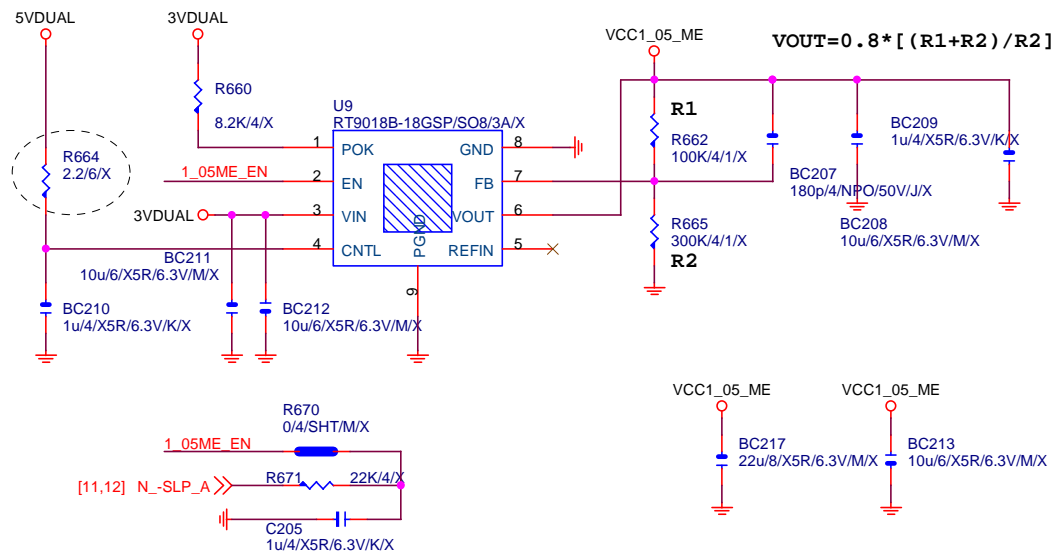

Second source


EM5103 - 10GL2-305103-01R

NCT3730S -

10GL2-303730-01R

VCC3_ME




N/A

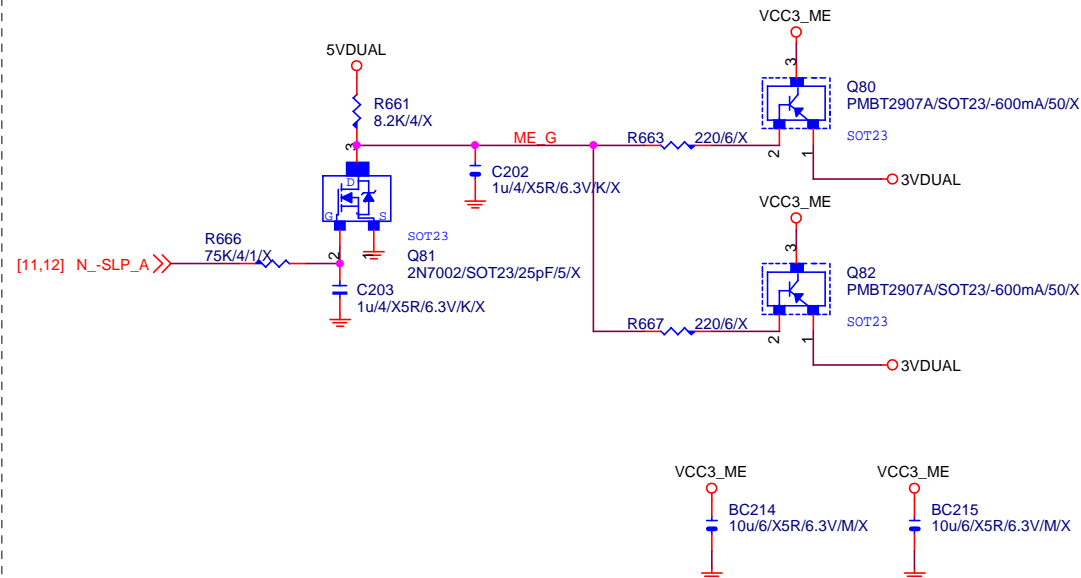

【技術通報R&D技術通報151】



33ohm Change to 68ohm

LPT PORT

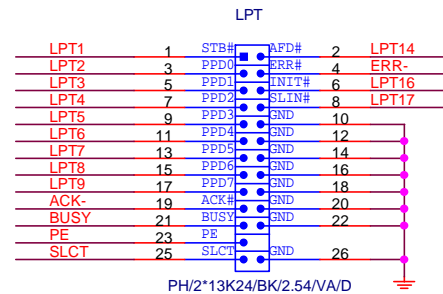
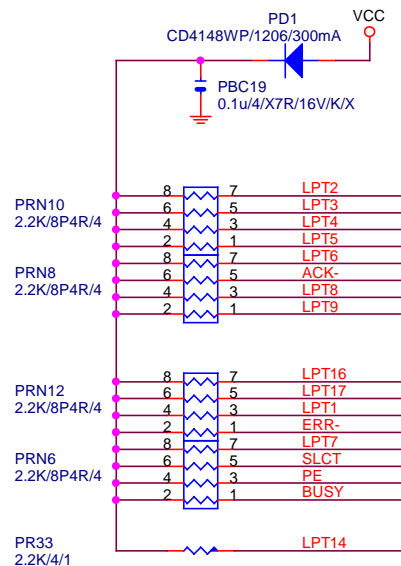
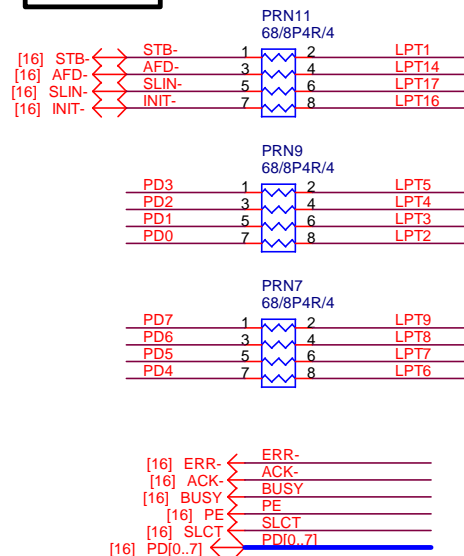


Gigabyte Technology			
Title			
LPT			
Size Custom	Document Number	GA-B85M-DS3H-A	
Date:	Tuesday, December 30, 2014	Sheet	29 of 30
			Rev 1.0




DVI

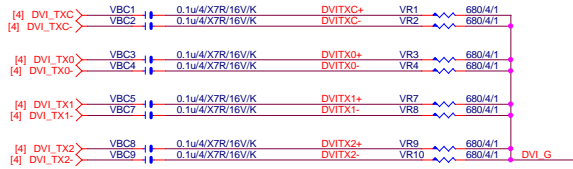




Close to connector

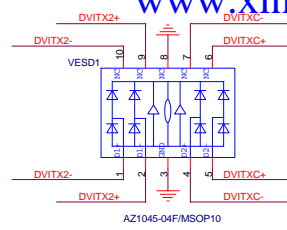

Close to connector

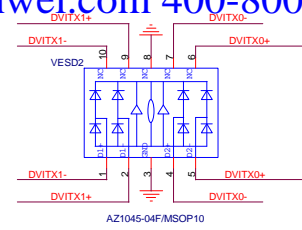

Close to connector

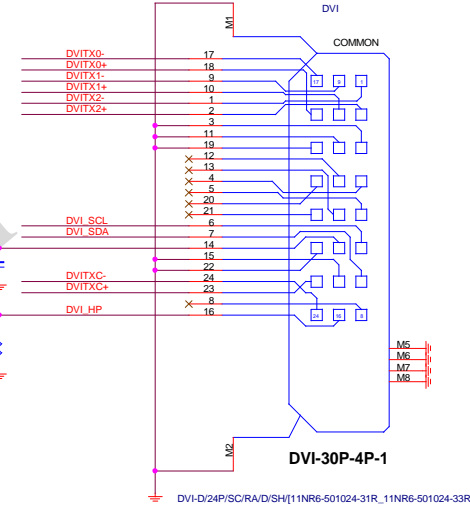

HDMI LEVEL SHIFT

